PlanetX. Manual

Contents

Installation
Interface language
The globe window
Navigation
Left panel
Link with the QGIS map
My Places
Ruler
Subsurface mode
Tours
Tracks
Trains of Finland
Baltic ships and aircraft
Flight mode
Project layers with time
Project layer swipe
Historical maps
Satellites
Scenes
View snapshot and view to layout
Other bodies
Assistant
Starry sky
Telegram bot
Log
Limitations
Data sources

Русская версия

Version 1.38.0

PlanetX is a 3D globe inside QGIS. The globe opens in its own window and shows the whole Earth with terrain and atmosphere, from space down to single streets. Layers of the current project, your own placemarks, paths and polygons lie on the globe. Tours fly over the places, and a tour recording gives frames for a video.

Plugin page - www.informpp.ru. The PlanetX globe without QGIS, a separate program, is PlanetX Lite.

Installation

The plugin runs in QGIS 3.36 and newer, including QGIS 4. It is tested on QGIS 3.36 with Qt 5 and on QGIS 4.0 with Qt 6. It needs a graphics card with OpenGL 3.3 and the Python module PyOpenGL. QGIS builds for Windows include PyOpenGL.

Open **Plugins** → **Manage and Install Plugins**, search for PlanetX and install it. QGIS does not need a restart.

The globe opens with the button on the PlanetX toolbar or from **Web** → **PlanetX**. The same menu holds About PlanetX. If the QGIS build has no PyOpenGL, the plugin says so and does not open the window.

Interface language


The language follows the QGIS settings, not the system. With Russian in QGIS the plugin is in Russian, with any other language it is in English. The label language on the globe is set separately, in the view properties.

The globe window

The panel is on the left, the globe view on the right. The icon bar sits in the top left corner of the view. The bottom right corner holds the PlanetX mark, to its left a short faint credit line of the sources of what the globe shows now. A click on the credits opens the Data sources window with the full credits, links and terms, a click on PlanetX opens the About window. The border between the panel and the view is dragged with the mouse.

The properties of a placemark, folder, image, water body bathymetry and layer extrusion open in the panel to the right of the view. The view narrows by its width, the panel width is changed with the splitter and remembered. The panel holds one properties window. A new one closes the previous one with its Cancel - changes of the previous one without OK are not saved. The ✕ button in the panel header works as Cancel.

When the window opens for the first time in a QGIS profile, an introduction to the plugin runs - five hints over the window. They show the globe under the mouse, the Search field, the Layers section, the right-click menu and the time slider. A hint shades the window except its place, and the globe under it can be tried. The Back and Next buttons turn the hints, Close and Escape end the introduction. It is repeated from the Search field with the action Getting to know the plugin.

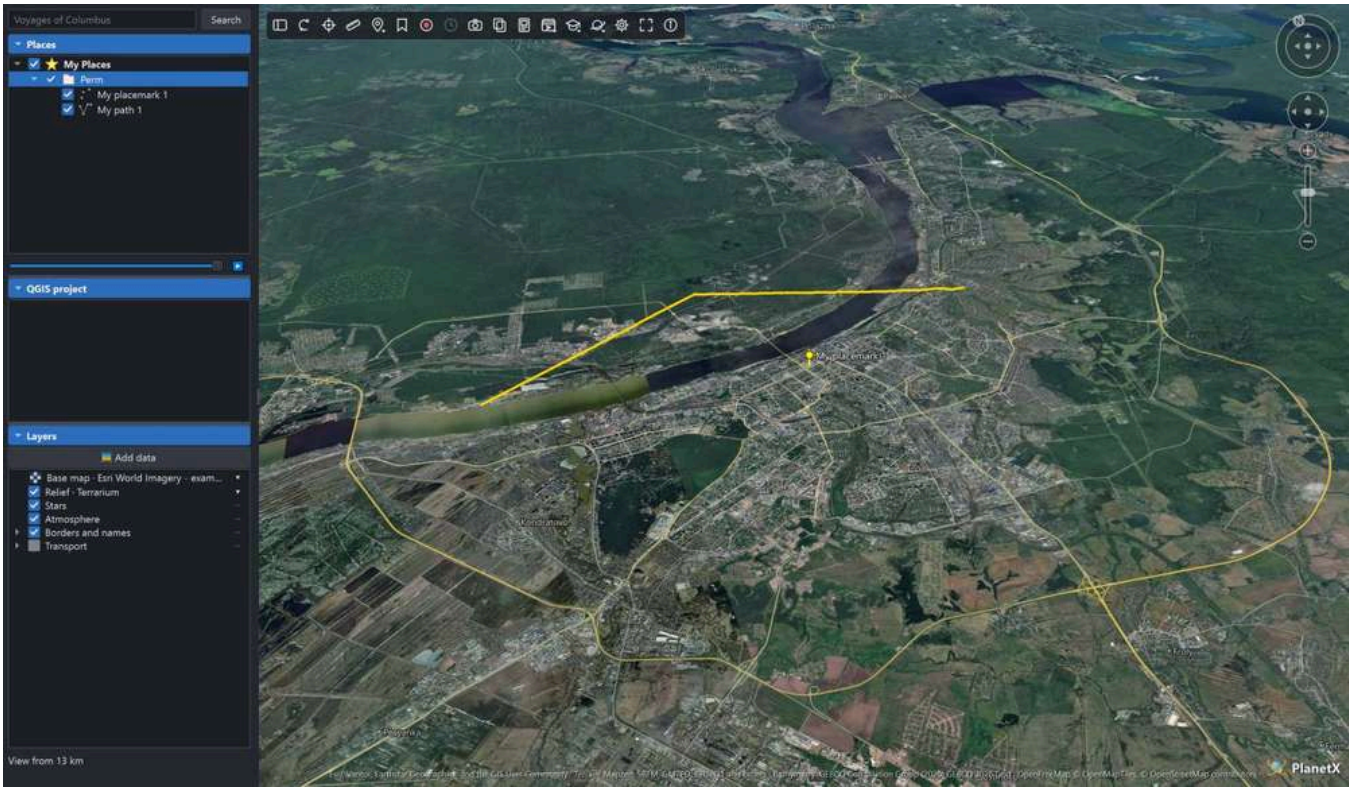

Icon bar

Icon	What it does
Sidebar	Hides and shows the left panel, the view takes its place
Refresh	Shows new settings and layers. The icon is visible only when automatic update is off in the View properties window. It turns orange when there is something to show
Synchronization	Links the globe with the QGIS map window
Identify features	Turns on identify by a click on the globe
Ruler	Opens the Ruler window
New placemark	Opens the New placemark window
Save view	Puts a placemark at the look-at point with height, heading and tilt
Record a flight	Records the camera movement as a tour into My Places. The ● button of the tour bar records a tour to video
Time slider	Opens and closes the time slider. The slider is shared by placemarks, tracks, project layers, events, maps and the globe clock. It is available when visible data has a time
View snapshot	Saves the view to a PNG or JPEG file
Copy view	Puts the view on the clipboard without the tools
View to layout	Puts the view into a QGIS layout as a picture
Scene	The menu Save Scene... and Open Scene...
Demo	Ready scenes by body, see Demo
Body	The menu of planets, moons, asteroids and Sky, see Other bodies and Starry sky
View properties	Base map and data sources, terrain, labels, link with the map, update, coordinate format, subsurface mode, assistant

Icon	What it does
Full screen	The globe view over the whole screen for a presentation, the F11 key, see Full screen
About	Controls, data sources, buttons for the manual, the log and web pages

Full screen

The Full screen icon or the F11 key spreads the globe window over the whole screen of the monitor it stands on. The left panel, the icon bar and the loading icon hide. The navigation controls, the time slider, the tour bar, the layer legends and the source credits stay, a tour can be played and stopped. The Esc key or F11 again brings back the window and the panels. The Search line finds the same action by the words full screen and presentation.

Status line

The status line sits under the left panel. It usually shows the camera height, for example "Overview from 2 000 km". The second line shows the coordinates and elevation of the point under the cursor. The coordinate format is chosen in the view properties.

The line also reports loading:

- "loading 12" - this many tiles, layer pictures and labels still wait for loading.
- "loading has stalled for 7 s" - data waits and nothing has arrived for 5 seconds or longer.
- "places are heavy, 250 thousand vertices" - your own objects exceed 200 thousand vertices, turning may become slow.
- "The base map did not load" and "The vector base did not load" - the source answered with an error.

While loading goes on, a blue icon spins to the right of the icon bar. A short load does not light it, it appears after half a second. When loading stalls, the icon turns orange. Its tooltip tells how much still waits.

Messages of search, scenes, tours and recording stay for 5 seconds.

Navigation

Navigation uses the mouse, the keys and the navigation controls.

Mouse

Action	What happens
Left button drag	The Earth follows the cursor. After release it spins on by inertia
Wheel	Zooms in and out. The point under the cursor stays in place
Left double click	Flies to the point under the cursor and zooms in 2.5 times
Right double click	Zooms out 2.5 times
Right button drag	Up - closer, down - farther, toward the press point
Right click	The menu of the point under the cursor
Middle button or left with Shift	Turn and tilt around the look-at point
Left button with Ctrl	Moves the view along the screen, the view direction stays
Left button with Ctrl and Shift	Looks around, the eye stays in place

Moving the view with Ctrl drags the picture under the cursor like a sheet of paper and does not turn the Earth around its centre. This way a part of the Earth cutaway at the window edge comes to the middle under the same view angle. After a sideways move the frame can be turned relative to north, the N and R keys put north up again.

The camera does not go lower than 50 m above the terrain. The tilt is limited to 85°. While the ruler, drawing or identify is on, a double click stays two plain clicks and places points.


Keys

Keys work when the globe view has focus. A click on the globe gives it focus.

Key	What happens
Arrows	Move the view by a twentieth of the window width
Shift and arrows	Turn and tilt by 3°
Ctrl and arrows	Look around by 3°
PageUp, plus	Zoom in by a wheel step
PageDown, minus	Zoom out by a wheel step
N	North up
U	Look straight down
R	North up and look straight down
Space	Stop inertia and flight

On-screen controls

The navigation controls stand in the top right corner of the view.



Control	What it does
Compass ring	Dragging turns the view. The letter N shows north
Letter N	A click puts north up
Stick inside the ring	While the button is held, the view looks toward the press
Dot in the middle of the ring	A click returns the vertical view without tilt and roll, like the U key. The heading and height stay
Lower stick	While the button is held, the view moves toward the press

Control	What it does
Plus and minus	While the button is held, the camera zooms in or out smoothly
Slider	The thumb stands at the camera height, dragging sets a new one

The speed of the sticks grows with the distance from the middle. From space the lower stick moves the view no faster than the Earth radius per second. The controls are always shown. While the cursor is far away, they stand as a faint outline and do not cover the view. When the cursor comes near the corner of the view, they are drawn in full.

Place search

Type a place name into the Search field at the top of the panel, for example `Perm`, coordinates or a topic, for example "Voyages of Columbus" - this example stands grey in the empty field. Enter or the Search button starts the search. A topic without a place on the map becomes placemarks, see Places from a description.

Format	Example
Decimal degrees	`58.0105, 56.2294`
Degrees, minutes, seconds	`58°00’37.8” N, 56°13’45.8” E` or `58 00 37.8 N 56 13 45.8 E`
UTM	`40V 454464 6430139`
MGRS	`40V DK 54464 30138`

Search also understands the coordinates copied from the status line of the globe together with the elevation.

- Coordinates start a flight at once. The camera lands no higher than 2 km from the point.
- A name goes to the Nominatim service in the label language. The camera flies to the first place found and frames it whole.
- When several places are found, they are listed under the field. A click on a row starts a flight.
- The found place carries a red pin. Clearing the field removes the pin and closes the list.

Suggestions of five kinds appear below the field while typing:

- Placemarks of My Places on the body on the screen with a matching name.
- Actions of the plugin - layers, catalogue maps, windows, icon bar tools, demos and globe bodies. The suggestion names the action and what it will do, for example "Currents - turn on" or "Ruler - open the window". An action is also found by a related word - "power lines", "power plants", "imagery", "contours", "iss".
- Earlier queries.
- Stars and constellations when the sky view is open.
- Sections of this manual, no more than three, at the end of the list, for example for the question "how to add a wind turbine model". A section fits if it has at least half of the query words, words in the title weigh more. Words are compared by their beginning, so "model" also finds "models". Question words such as "how" and "where" do not count. The suggestion tooltip shows the paragraph with the query words.

A click on a suggestion or Enter on it starts a flight to the placemark or the sky object or runs the action, an earlier query is searched again. A manual section opens to the right of the view at the paragraph with the query words. A link to another section opens it in the same place, the Open on GitHub button shows the section in the browser with pictures. The manual in the plugin is in the QGIS interface language, without pictures, and needs no network. Ctrl+K from anywhere in the globe window puts the cursor into the field and

shows the layers that are on and the earlier queries. The Down key moves into the list of suggestions, in an empty field it shows the earlier queries. Escape closes the list. Place names from the network are not suggested while typing. The Nominatim service takes a query only on Enter.

Enter in the field handles the query in this order:

1. Coordinates start a flight.
2. The exact name of an own placemark starts a flight to it with no network request. In the sky view the name of a star or a constellation works the same way.
3. The exact name of an action or its word runs the action. Demos do not open on Enter, "Perm" stays a place search.
4. A request in words goes to the assistant, the Assistant section describes it.
5. Anything else is searched as a place name.

Queries entered with Enter are kept in the QGIS profile, 30 at most. The Clear search history button of the Assistant group in the View properties window erases them.

Over a long distance the camera rises and lands smoothly. The mouse interrupts a flight.

Left panel

The panel has three sections - Places, QGIS project and Layers. A click on a header collapses the section, and the open sections take its place. The globe remembers which sections are collapsed.

Layers section

The section shows in one list what is on the globe now. Its check boxes take effect at once, without the Refresh button. The rows go like this:

Rows	What they hold
Base map	The base map - imagery or a map. A click on the row opens a menu - Esri World Imagery, OpenStreetMap, the QGIS XYZ Tiles connections and Add tile source...
Relief	The check box turns heights and hill shading on. A click on the name opens a menu - land heights Terrarium, Copernicus DEM 30 m, GEDTM30, ALOS AW3D30, NASADEM or USGS 3DEP 10 m, Sea and ocean depths with the depth source - the height tiles or GEBCO 2026 - and Data sources...
Layers that are on	Layers and the map of the catalogue, the coordinate grid, 3D buildings, contours - everything that is switched on
Vector base groups	Borders and names, Transport, Nature, while something in them is on

A row takes one line. The ⋯ on the right of a row opens its menu, the right button opens the same menu. Clearing the check box switches the layer off, the row stays, and the same check box switches the layer on again. The Remove from the globe item of the menu removes the row too. The Opacity slider of the menu changes the opacity of the layer - points, surface colouring or lines, the value is remembered. For mineral deposits, power plants, mines, earthquakes, fires, plate boundaries, mining areas, power lines and cables the menu also saves what is in view to the QGIS project. The To QGIS project... item asks for a GeoPackage file and writes the objects inside the view frame with the record fields into it. The layer goes into the PlanetX - globe layers group at the top of the project tree. Points keep the globe colour and size, lines and outlines keep their style. A repeated export replaces the earlier layer with the same name in the group. The exported layer is a copy of a globe layer, so it does not go onto the globe by itself, in the Layers as on the QGIS map

mode too. Its check box in the QGIS project section shows it. Colourings go to the project too. A weather forecast field and currents go as a raster of values inside the view frame (degrees, mm/h, m/s, for wind and currents also bands of the eastward and northward speeds) with the globe legend. A NASA theme, clouds and surface temperature go as a NASA GIBS image of the same date, the temperature as two rasters - sea and land.

The Add data button at the top of the section opens the catalogue window, see Add data catalogue. The vector base groups hold rows. Borders and names holds Borders, Places, Water names, Rivers and Lakes and reservoirs. Transport holds Roads, Road numbers, Railways and Airports. Nature holds Peaks, Reserves and national parks. Rivers and lakes are off by default.

The vector base comes from OpenFreeMap tiles. On the first opening borders, places, terrain and stars are on. The tooltip of each row tells how the feature is drawn and from what height it is visible.

The grid step follows the camera height, from 30° from space to seconds near the ground. The stars stand where they stand over the Earth at this minute and fade when the camera goes below 150 km. The Milky Way image, about 10 MB, is downloaded when the stars are first shown and comes from the QGIS cache afterwards. The Atmosphere row is on by default. Without it there is no air glow at the edge of the globe, no sky above the horizon and no haze over the distant surface, the view background is black space. Clouds lie as a veil over the imagery. Snow and ice get into the clouds too, they have the same colour.

The Surface temperature map of the catalogue colours land and sea with their own scales. The scales in degrees Celsius are in the bottom left corner of the view. Land shows the temperature of the surface itself by day, not of the air, over 8 days. Land may have gaps under clouds. Sea shows the water temperature near the surface over a day.

The Sun layer lights the terrain and buildings from the side of the sun. The night side of the Earth is dark, the air over it does not glow. City lights shine on it - the NASA Black Marble image of 2016, pixel about 600 m. In the twilight the lights fade together with the night, under clouds they are weaker. The sun time is the end of the interval of the open time slider, so the light of the hour of a placemark shows. Without the slider the sun follows the computer clock. Without the Sun layer the light falls from the north-west at 45°, as on a relief map. The position of the sun is computed to about 0.01°.

Near the camera the Sun layer casts shadows - the terrain, 3D buildings and 3D models shade the ground, buildings and models behind them. Shadows are shown while the distance to the look point is at most 40 km, in a square of up to 5 km around the look point, and they fade towards the edge of the square. Slopes and houses far from the look point are lit without shadows. A shadow comes from what is in the frame now, so a mountain behind the camera casts none. The view snapshot and the flight recording have shadows. The Shadows item of the ⋯ menu of the Sun row turns them off, then the frame is drawn faster. The graphics card needs at least 17 texture units of the fragment shader, otherwise there are no shadows.

Labels stay level at any turn and tilt and do not overlap. A place behind a mountain or beyond the horizon has no label.

The Slope and Aspect layers colour the surface by the terrain heights. Slope is the angle of the surface to the horizontal, in classes 0-2°, 2-5°, 5-10°, 10-15°, 15-25°, 25-35° and steeper than 35°, from green to purple. Aspect is the compass direction a slope faces downhill, each of the eight directions has its colour, ground flatter than 0.5° is grey. The scale is in the bottom left corner of the view. The slope is computed from the true heights, without the vertical exaggeration of the view. The layer exists on the Earth, Mars and the Moon, other bodies have no heights. The accuracy is limited by the height pixel. It is about 5 m at the equator on the most detailed level on the Earth, 2.6 km on Mars, 1.3 km on the Moon.

Slope and contours are drawn no farther than three distances from the camera to the look-at point. In a view tilted to the horizon the far terrain stays without them. So the computation does not hold the view on hundreds of far tiles.

The Contours layer of the Map category of the catalogue draws lines of equal height on the surface, as on a topographic map. The contour interval depends on the zoom. It is 1, 2, 2.5 or 5 metres times a power of ten. Close up at middle latitudes it is 5 m, from tens of kilometres up it is 20-50 m. Every fifth contour is thicker. Below sea level the lines are blue, these are depth contours. Where contours merge on a steep slope, they fade. Contours are built from the same heights as the slope and have the same accuracy. The layer exists on the Earth, Mars and the Moon.

The interval is never finer than 5 m. The open Earth heights were surveyed with a 20-90 m spacing, detailed tiles are their resampling. Close up the contours are therefore built from smoothed heights with about a 20 m spacing, resampled smoothly. The lines have no steps, small terrain forms do not show on them. Open sea depths exist in these data only on overview levels, so depth contours in the open sea are built from them close up too. Own terrain from a project raster and an own height source give contours at full detail.

Thicker contours are labelled with their height, as on a topographic map. The number stands in a gap of the line, the top of the digits faces uphill. There is no label at a tile edge, on a sharp bend of the line and where the neighbouring contours are closer than the height of the digits. A flat lake surface at a contour height does not count as a line and is not filled.

On satellite imagery contours are yellow and depth contours light blue, on a map they are brown and blue. Imagery means Esri World Imagery and the imagery of other bodies. Basemaps with imagery, satellite, aerial, ortho and similar words in the name or address count as imagery too.

While the layer is on, its scale stands in the bottom left corner of the view. It shows the line colour, the interval in the middle of the view and the step of thicker contours. The cross of the scale switches the contours off.

The To the QGIS project… link of the scale exports the contours of an area around the view point as a GeoPackage layer. The View contours to the QGIS project… item of the globe menu does the same. Export exists only on the Earth. The area is the view strip at the view point with the width and height of the window, the interval is as on the screen. Heights are loaded for up to 30 s. The layer goes to the PlanetX - contours group at the top of the layer tree. The `elev` field is the height, thicker lines are wider and labelled.

Sea and ocean depths are part of the terrain. The floor lies at its depths, and semi-transparent water lies above it at sea level. Water shallower than 200 m is more transparent, the floor shows near the shore. Below sea level the status bar shows the depth under the cursor. The depths come from the GEBCO 2026 grid with a step of about 450 m over the Terrarium tiles, coarser than level 5 - from the tiles themselves, in the ocean these are ETOPO1 data. The menu of the Relief row and the Data sources window choose the depth source. The depths are not fit for navigation. Sea names stay at sea level. The elevation profile, the ruler and the slope use the floor, the viewshed and insolation use the water surface. A profile below sea level shows the water and a dashed sea level line. Dry depressions below zero, for example the Dead Sea, are not told apart from the sea by the heights and are filled on the profile. On the globe water lies only where the vector base map has it. The bottom of a quarry and a dry depression below zero stay land, placemarks, paths and labels on them stand on the relief. Until the water layer of the base map is loaded, such a place is shown as water. The Sea and ocean depths box in the Terrain group of the view properties switches them off, then heights below sea level count as zero and the sea is flat. Depths exist only on the Earth.

The Paleogeography layer shows the Earth in the past, up to 540 million years ago, after the PALEOMAP PaleoDEM maps (Scotese and Wright, 2018). The map of an age holds land heights and sea depths on a 0.1° grid, about 11 km, coloured by height with hill shading. A slider in the bottom left corner of the view sets the age in millions of years in steps of 5 million years, the geological period is named next to it. The ▶ button

shows the ages one after another towards the present. Today's imagery, borders, labels and relief are removed for that time, the relief setting itself does not change. The maps lie as tiles in the planetx-terrain repository, the first showing of an age needs the internet. A new age appears at once in a coarse form and sharpens as it loads. When the window opens, the row is off.

Add data catalogue


The Add data button of the Layers section opens the catalogue as a separate window over the globe. The window is not modal - the globe, the panel and the Layers list stay as they were, the catalogue can stay open. The window remembers its place and size. Sections with groups stand on the left. A click on a section shows the rows of all its groups, a click on a group shows only that group.

- Base - Base maps, Local data, Map (the vector base, coordinate grid, 3D buildings, contours, cadastre), Map overlays and Encyclopedia.
- Earth now - Weather, NASA themes by groups, Soils and All NASA GIBS layers.
- Archive and surveys - Imagery archive (Esri Wayback, event imagery), Historical maps and Imagery at a point.
- Inside the Earth - Geology (Geological map, Lithology, Earth cutaway, Paleogeography), Earthquakes and plates (Earthquakes, Historical earthquakes, Plate boundaries, Active faults, Plate motion, Volcanoes), Geophysics (Magnetic poles, Declination lines, Magnetic anomalies, Gravity anomalies, Bouguer anomalies, Geoid, Ocean floor age, Heat flow) and Commodities (Mineral deposits, Mining areas, OSM mines and quarries).
- Sky - Sky and light (Stars, Atmosphere, Clouds, Sun, Satellites) and Satellites - the satellite groups.
- Energy and transport - Energy (Power plants, Power lines and pipelines, Submarine cables) and Transport.
- Terrain analysis - Slope, Aspect.

The search field looks for a name and a description across the whole catalogue.

The Windows at the look point rows are Satellite images, Lidar point clouds, OpenAerialMap images, Rumsey historical maps and Eto Mesto old maps. They have no check box. The Open the window button and a double click open the window of the source at the look point, as the same items of the globe menu do.

The rows are split into One map on the globe and Layers - switched on together. A row has a check box, a preview, the name and the source and day of the map on a second line. The preview of a map is its tile over Eurasia on the latest ready day over the base map, forecast fields and fires show a strip of the scale colours. The check box shows a map or a layer on the globe. A click on a row shows its description under the list with the Show on the globe or Remove from the globe and To QGIS project… buttons. The globe shows one map of the catalogue, the cross on its scale in the lower left corner of the view also removes it. A satellite group card shows or removes the group. The first group switches the Satellites layer on, the last removed one switches it off.

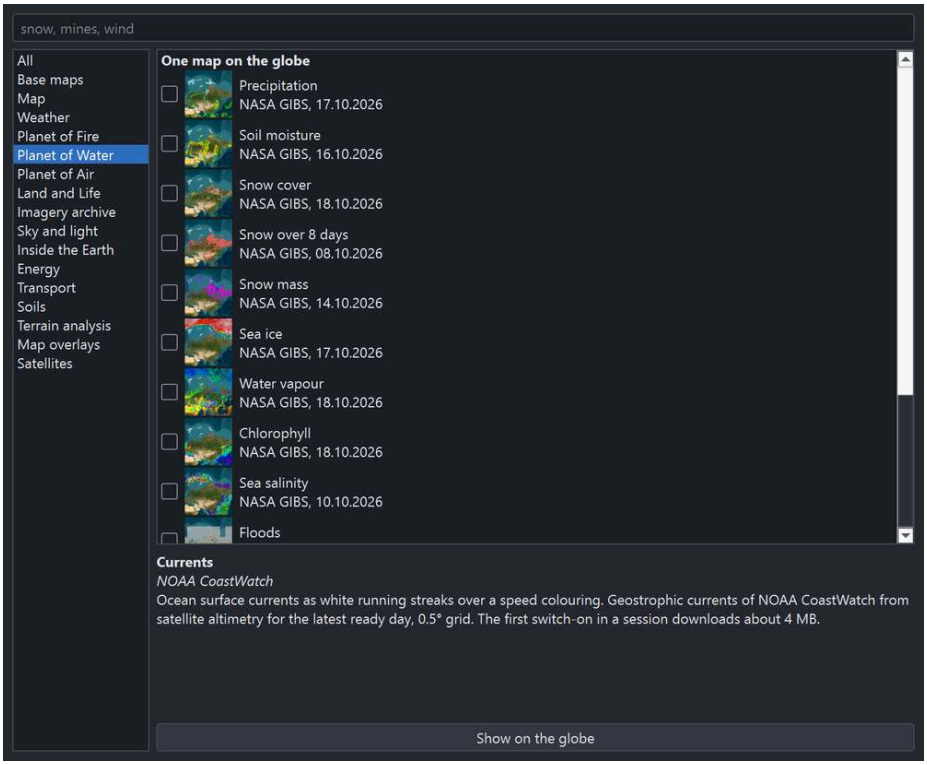

NASA themes are rasters by days, months or years from the NASA GIBS service. A day of a series counts as ready a day later, before that its image is empty. The NASA theme groups of the catalogue hold:

- Planet of Fire - fire spots, smoke, aerosol optical depth, carbon monoxide and its emission.
- Planet of Water - precipitation, soil moisture, daily snow, snow over 8 days, snow mass, sea ice, water vapour, chlorophyll, sea salinity and floods.
- Planet of Air - nitrogen dioxide, sulphur dioxide, methane, carbon dioxide and ozone.
- Land and Life - vegetation, dust and night lights.

The theme lies as semi-transparent colouring over the imagery, where there is no data the imagery shows. A legend with the name, units and date stands in the bottom left corner of the view. The day of the theme is set by the right handle of the time slider, see Placemark time and the time slider. A chosen theme opens the slider on the last day of its series. The handle gives the nearest day of the series that is not later, missing days of the series are skipped. A new theme takes the same moment while the slider is open. Some series lag behind today by months, the tooltip of the theme says so. Themes exist only on the Earth.

Daily snow from MODIS imagery shows only where the day had no clouds and was light. On 15 January 2026 over West Siberia clouds and the polar night hid snow on 78 % of the area. The 8-day summary is hidden on 40 %. Snow mass is a SMAP model calculation from satellite data, it has no gaps under clouds. The snow themes show land only. Lake ice is in the 8-day summary, sea ice is the Sea ice theme.

The All NASA GIBS layers category shows the whole catalogue of the service - more than a thousand raster imagery and map layers. The list comes from the GIBS catalogue on the first showing of the category or on a search of three characters or more, the first time in about 10 seconds. The Find field finds a layer by all words of the query, for example "snow cover daily terra", the layer titles are in English. These rows are not shown in All. A catalogue layer behaves as a theme - one map on the globe, a date series and the timeline, a colour scale, the day swipe. JPEG imagery, for example "Corrected Reflectance (True Color, MODIS, Terra)", lies without transparency. Layers without a date series show one picture. The globe remembers the chosen layer after a restart too. Layers with a step shorter than a day and GIBS vector layers are not in the list.

Comparison swipe

The ⇆ button of the time slider splits the view with a swipe. Right of the swipe the theme is shown for the day of the slider, left of it for a day of its own. By default this is the same day a year ago, for a series shorter than a year its first day. Tags with the days of both sides stand above the swipe. The ‹ and › buttons of the left tag move its day along the theme series, the cross removes the swipe. The swipe is dragged with the mouse by the strip with a circle.

The white line along the border is also on a view snapshot and in a tour recording. The swipe works with NASA themes. GFS forecast fields, fires and surface temperature have no swipe. A change of theme keeps the swipe, its day is looked up in the series of the new theme. Switching the theme off removes the swipe.

Esri Wayback imagery archive

The Esri Wayback map of the Imagery archive category in the catalog shows past releases of the Esri World Imagery basemap. The releases start on 20 February 2014, in October 2026 there are 197 of them. The map opens the time slider at the latest release. The right handle selects the release not later than its day.

The ‹ and › steps of the slider go only through the releases in which the image at the centre of the view changed. When the view has stood still for 0.7 s, the plugin asks the Esri service which release the tile at the centre of the view actually comes from. The closer the view, the smaller this tile. At the centre of Perm from 3 km there are 12 such releases out of 197. Until the service answers, the steps go through all releases.

The ⇆ swipe compares two releases in the same way as two days of a NASA theme. By default the left part shows the release a year earlier.

The release date is not the capture date. Point details and the Identify features mode give the Esri Wayback imagery archive group - the capture date, the provider, the imaging system, the resolution and the accuracy of the release image at the clicked point. Add to QGIS project… of the On the globe row adds the release as an XYZ tile layer, no file is written.

The terms are the same as for Esri World Imagery, see Data sources.

Disaster imagery

The Disaster imagery map of the Imagery archive category shows imagery of earthquakes, floods, wildfires and hurricanes from two open catalogs. Vantor (formerly Maxar) provides WorldView strips, Planet provides PlanetScope, SkySat and Pelican scenes and the quarterly Planet basemap before the event. On 25 October 2026 the catalogs hold 18 events - 11 from Vantor and 7 from Planet. No key is needed.

The map opens the Disaster imagery window with a list of events. A row shows the event, the date and the source, below the list is the catalog description. The Search bar also opens the window by the words disaster imagery, earthquake, flood and the like. Show on the globe loads the list of the event images, flies to the event and opens the time slider at the last imagery day. The earthquake in Colombia on 10 August 2026 has 164 images over 5 days.

The right handle of the slider selects the day. The globe shows all images not later than that day, newer ones over older ones. The ‹ and › steps go through the imagery days. If the event has images from before it, the ⇆ swipe turns on at once. The left part shows the last day before the event, the right part the slider day. The images come from cloud-optimised GeoTIFFs in parts, only what is in view. The first display of a large event takes several minutes.

Add to QGIS project… of the On the globe row adds the images of the day within the view as network rasters to the PlanetX - disaster imagery group, at most 12 images, no files are written. Remove from the globe in the window takes the imagery away.

The imagery licence is CC BY-NC 4.0. It allows only non-commercial use and requires the Vantor or Planet Labs PBC credit. It is shown in the corner of the view.


Weather

The Weather category stands in the catalogue before the NASA themes. Its first map is Surface temperature of land and sea from NASA. The others are Air temperature at 2 m, Precipitation, GFS forecast in mm/h, Wind at 10 m in m/s and Cloud cover, GFS forecast in percent. Precipitation from satellite imagery is the Precipitation, IMERG satellites row of Planet of Water. The fields come from the NOAA GFS forecast model with a 0.25° grid, about 28 km. A field is chosen in the catalogue, as a NASA theme.

The Aurora map shows the probability of a visible aurora in percent by the OVATION forecast of the NOAA Space Weather Prediction Center for the next 30-90 minutes, 1° grid. Below 3 % the field is transparent, a weak aurora is green, a strong one yellow and red. There is one forecast, for now, the time slider does not change it. The map asks for a new forecast at most once in 10 minutes. City lights on the night side come with the Sun layer, they can be on together with the aurora.

White streaks run over the Wind colouring - particles that float with the wind and drag a trail. A streak of a weak wind is paler. The streaks are sped up - in a second a wind of typical strength passes about an eighth of the view width, so they are visible both from afar and close up. They are born within the view and follow it.

The Currents layer of the Planet of water group of the catalogue shows ocean surface currents with the same white streaks over a speed colouring from dark blue for slow ones to red for 2.5 m/s. Slow water is almost not coloured, the streak of a slow current is paler. From afar the particles are born within the visible circle of the Earth and pass no more than a third of a grid cell per frame, so the trail does not loop through the eddies. The currents are geostrophic, NOAA CoastWatch calculates them from satellite altimetry for a day, the data lag two to three weeks. The series starts on 13 February 2017, the day of the currents is set by the right handle of the time slider, without the slider it is the latest ready day. The 0.25° grid is taken at every other node, 0.5°. The first switch-on in a QGIS session downloads about 4 MB. The Gulf Stream, Kuroshio, the current around Antarctica and eddies tens of kilometres across are visible. Near the coasts and under ice there is no data.

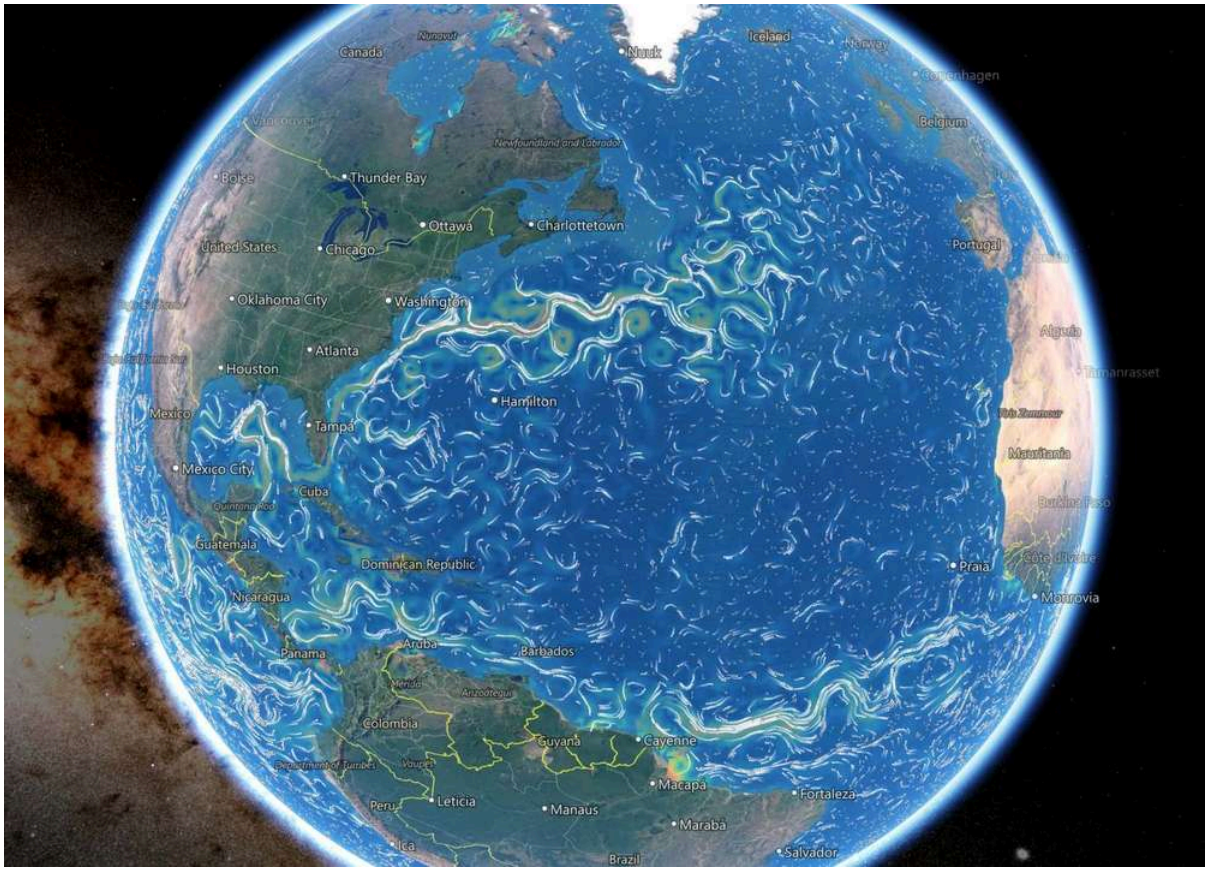

The time slider sets the moment of the field. A chosen field opens the slider at the present moment. The slider spans 10 days before the latest model run and 16 days of forecast after it. The future is the forecast of the latest run, hourly for the first 5 days, then every 3 hours. The past is the model analysis for the nearest hour. The ‹ and › buttons of the slider move the moment by an hour, ▶ shows the hours one after another and waits for each to load. The model runs 4 times a day, a new run is published 4-5 hours later.

A field for the whole world weighs 0.5-0.8 MB and arrives in a few seconds. The legend in the bottom left corner shows the units and the valid time of the field in UTC. It is a model calculation. Model clouds are not a cloud image, the Clouds layer gives the image.

The values of the field stand over its colours. Temperature is in degrees, precipitation in mm/h, wind in m/s, clouds in percent. The values stand at the nodes of a latitude and longitude grid, about six across the view. The node step changes with the eye height, from 30° from space to 0.25° close up. The values come from the same field, there are no new network requests. Where precipitation is below 0.1 mm/h, there are no precipitation values.

The first map of the Planet of Fire is Fires. It shows fire spots over the last 24 hours from VIIRS images of the NOAA-20 satellite from the NASA FIRMS feed, about 78 thousand spots. A dot stands at the fire, its colour and size show the radiative power from 1 to 1000 MW, the legend stands in the bottom left corner of the view. The feed, about 6 MB, is loaded each time the row is switched on. The spots stand on the time slider by the image time. A click on a spot in the Identify mode shows its power, image time and confidence.

The Plate boundaries layer shows the lithospheric plate boundaries after the PB2002 model (Bird, 2003). Red lines are plates moving apart at oceanic ridges and continental rifts, green - plates sliding along transform faults, blue - plates converging in subduction and collision zones. Plate names show as labels. A click near a boundary in the Identify mode shows the boundary type, the plate pair and the speed of their relative motion in mm/yr. In the plate pair a slash in Bird's notation shows which plate goes under which. "PA\OK" is the Pacific plate under the Okhotsk plate.

The Active faults layer shows about 13.7 thousand faults of the world from the GEM Global Active Faults database (Styron and Pagani, 2020) compiled from regional catalogues. The line colour shows the kind of slip. Blue lines are normal faults, red ones reverse faults, thrusts and subduction zones, green ones strike-slip faults, orange ones spreading ridges, purple ones folds, grey ones have no kind given. The legend stands in the lower left corner of the view. A click on a line shows the name, the kind of slip, the database entry, the slip rate in mm/yr, the dip and the source catalogue. The database file, about 11 MB, is downloaded on the first switch-on and kept in the QGIS profile. The database licence is CC BY-SA 4.0.

The Magnetic poles layer shows the north and south magnetic poles - the points where a compass needle stands vertical. The red point is the north pole, the blue one is the south pole, each trails its path since 1590. The time slider opens by itself. The right handle moves the poles over the years, the left one cuts the start of the path - the path starts at the year of the left handle. The positions of 1590-2025 come from the NOAA NCEI tables (the gufm1 and IGRF models), after 2025 the pole is computed with the IGRF-14 model up to 2030. A click on the globe in the Identify mode shows in the Magnetic field group the declination - the angle between compass north and geographic north, the inclination and the field intensity at the point for the slider year. The field is computed with the IGRF-14 model for 1900-2030 and with the gufm1 model (Jackson et al., 2000) for 1590-1899. The gufm1 file, about 1 MB, is downloaded from the authors' site on the first request for a year before 1900, until it arrives the window shows only the year. From 1900 to 2025 the north pole shifted 2475 km in a straight line, from the Canadian Arctic towards Siberia.

The Declination lines layer shows lines of equal magnetic declination every 10° for the year of the right handle of the time slider. The slider opens by itself, as for the poles. Red lines mean east declination, blue lines west declination, the green line zero declination, where the compass points to geographic north. Labels on the lines give the declination in degrees. The lines converge at the magnetic poles. They are computed with the same gufm1 and IGRF-14 models on a 2° grid, from 1590 to 2030. In 1800 the declination near London was about 24° west, by 2020 it came close to zero.

The Plate motion layer shows arrows of the motion of lithospheric plates after the NNR-MORVEL56 model (Argus, Gordon and DeMets, 2011) - the velocity relative to the mean motion of all plates. The arrows stand at grid nodes, about seven across the view, the grid step changes with the eye height. The arrow length grows with the speed, the number at the arrow start is the speed in mm/yr. The plate at a point is found from the PB2002 outlines. The Pacific plate near Hawaii moves northwest at about 70 mm/yr, the Eurasian plate at about 25 mm/yr. A click in the Identify mode shows the plate, speed and direction of motion in the Place group.

The Volcanoes layer shows about 1200 volcanoes that erupted during the last 12 thousand years, after the list of the Global Volcanism Program of the Smithsonian Institution. The point colour shows the time of the last eruption. A red point means an eruption after 1900, orange - from 1500 to 1899, yellow - earlier, grey - the time is unknown. The point size grows with the volcano height. The legend stands in the lower left corner of the view. A click on a point shows the name, volcano type, height, year of the last eruption, tectonic setting and a link to the volcano page on the GVP site. The list is downloaded on the first switch-on, about 2 MB, and kept as a file in the QGIS profile.

The Magnetic anomalies layer shows the departure of the Earth magnetic field from the normal one after the NOAA NCEI EMAG2v3 grid at 4 km above the ellipsoid, a grid step of about 4 km. Red places mean a stronger field than normal, blue a weaker one, the legend in the corner of the view runs from -250 to +250 nT. The anomalies reveal the crust, for example the Kursk magnetic anomaly, the stripes of the ocean floor on both sides of the mid-ocean ridges, ancient shields. Where there is no survey the layer is empty. A click in the Identify mode shows the value at the point, near Kursk about +270 nT. The tiles lie in the planetx-terrain repository, about 50 MB for the whole world, and load as they are shown.

The Gravity anomalies, Bouguer anomalies, Ocean floor age and Heat flow layers are value maps, like the magnetic anomalies. The globe shows one value map at a time, switching on another one removes the previous one. Each has its own legend in the corner of the view, a click in the Identify mode shows the value at the point. The tiles lie in the planetx-terrain repository and load as they are shown.

The Geological map layer shows the Macrostrat geological map of the world (University of Wisconsin-Madison) compiled from maps of different scales. The colour shows the age of the rocks on the stratigraphic scale. From afar the overview map of the world is visible, closer up - detailed maps where they exist. In Russia and Europe the most detailed map is the International Geological Map of Europe 1:5 000 000, in the USA the maps are much more detailed. Deeper than the most detailed map of a place the tiles are empty, and the enlarged coarser map stays on the screen. A click in the Identify mode shows in the Geology group the unit, the lithology, the age on the scale and in Ma, the source map and a link to the Macrostrat page at the point. Near Perm these are Permian clays, 274-252 Ma, after the map of Europe. The geological map shares its place with the geophysical value maps, the globe shows one of them. Add to QGIS project… of the On the globe row adds the map as an XYZ tile layer. The Macrostrat data are CC BY 4.0.

The Lithology layer shows the GLiM lithological map of the world (Hartmann and Moosdorf, 2012) - surface rocks in 16 classes. These are unconsolidated sediments, siliciclastic, mixed and carbonate sedimentary rocks, evaporites, pyroclastics, acid, intermediate and basic volcanic and plutonic rocks, metamorphic rocks, ice and glaciers. The map is compiled from 92 regional maps at a scale of about 1:3 750 000. The class legend sits in the lower left corner of the view. A click in the Identify mode shows the rock class at the point in the Lithology group. The tiles are kept in the planetx-terrain repository. Like the geological map, the lithology shares its place with the geophysical value maps.

The Historical earthquakes layer shows the ISC-GEM catalogue - about 74 thousand strong earthquakes of the world from 1904 to 2024 of magnitude 5 and above, with locations, depths and moment magnitudes recomputed in one way. The circles stand as in the Earthquakes layer, the colour shows the depth and the size the magnitude. The catalogue enters the time slider range, and its handles select the events by year. A click on a circle shows the place, date, magnitude, depth and a link to the USGS event page. The first use downloads the catalogue in parts, about 13 MB, and keeps it as a file in the QGIS profile. The catalogue licence is CC BY-SA 3.0.

The Land cover layer of the Earth and life group shows the ESA WorldCover map for 2021 from Sentinel-1 and Sentinel-2 images with a 10 m pixel. There are 11 classes - forest, shrubland, grassland, cropland, built-up, bare and sparse vegetation, snow and ice, permanent water bodies, herbaceous wetland, mangroves, moss and lichen. The class legend sits in the lower left corner of the view. From afar the map comes from the planetx-terrain repository, close up from the Microsoft Planetary Computer service. A click in the Identify mode shows the class at the point. The map licence is CC BY 4.0.

The Field boundaries 2025 and Field boundaries 2024 layers of the Earth and life group show the agricultural fields of the world from the Fields of the World dataset. This is a model estimate from Sentinel-2 images with a 10 m pixel, not cadastral parcels. The color runs from orange to green by the model score from 69 to 100, fields scoring below 69 are not shown as the dataset recommends. Fields appear only close up, from a height of about 70 km and below, from afar the layer is empty because tiles of coarse levels weigh hundreds of megabytes. The globe shows one such map, together with value maps and land change. A click on a field in the Identify mode shows its score. These layers have no export to the QGIS project. The dataset licence is CC BY 4.0.

The Water occurrence and Water transitions layers of the Planet of water group show the JRC Global Surface Water dataset (Pekel et al., 2016) from Landsat images of 1984-2021 with a 30 m pixel. Occurrence is the share of observations when the place was under water, from red (rarely) to blue (always). Transitions divide

water into classes - permanent and seasonal water, new and lost, seasonal to permanent and back, and ephemeral water. They show new reservoirs, shrunken lakes such as the Aral Sea, and migrating channels. A click in the Identify mode shows the occurrence in percent or the class.

The layers of the Soils group - Clay in soil, Sand in soil, Soil organic carbon and Soil pH - show properties of the soil layer 0-5 cm from ISRIC SoilGrids 2.0, a model built on soil profiles of the world with a 250 m grid. Clay and sand are in percent, organic carbon in g/kg, pH is measured in water. The pictures come from the SoilGrids WMS service, and a click in the Identify mode asks it for the value at the point. Water and places without data are transparent. The SoilGrids licence is CC BY 4.0.

The globe shows one map out of the lithological, geological, water, soil and geophysical value maps, turning on another one removes the previous one. Add to QGIS project… of the On the globe row adds such a map to the project as an XYZ tile layer or a WMS layer of the service.

The Gravity anomalies layer shows the free-air gravity anomaly - the departure of gravity from the normal one after the XGM2019e model (Zingerle et al., 2020), computed to degree 719, a step of about 28 km. Red places mean gravity above normal, blue below normal, the legend runs from -200 to +200 mGal. Over deep-sea trenches the anomaly drops to -300 mGal, near the Mariana Trench to about -305 mGal, over Hawaii it rises to +370 mGal. Seamounts show as red spots.

The Bouguer anomalies layer shows the same anomaly minus the attraction of the relief - the simple Bouguer correction $2\pi G\rho h$ after the NOAA ETOPO 2022 relief. Rock above sea level is removed with a density of 2670 kg/m³, ice with 917 kg/m³, water and ice below sea level are replaced by rock. The correction is computed on 1' cells and averaged to 0.25° cells. The terrain correction for the surrounding relief within 167 km is added to it - mountains and valleys near the point, 10 to 25 mGal per cell in mountains and almost 0 on plains. Under mountains the anomaly is negative, about -510 mGal at Tibet and about -155 mGal at the Alps - this is the thick light crust beneath them. Over the ocean it is positive, about +330 mGal in the middle of the Pacific. The legend runs from -400 to +400 mGal.

The Ocean floor age layer shows the age of the oceanic crust after the grid of Seton et al. 2020, a 0.1° step. Young floor at mid-ocean ridges is red, old floor at ocean margins is blue and purple, the oldest floor, about 180 Ma, lies in the western Pacific. Land and continental crust are not coloured.

The Heat flow layer shows the heat flow from the interior through the Earth's surface in mW/m² on a 0.5° grid built by kriging from 91 thousand measurements of the IHFC 2024 database. Blue places are cold old shields, red ones are rifts, mid-ocean ridges and volcanic areas, near Yellowstone about 180 mW/m². Far from measurements the grid is smoothed.

The Geoid layer shows the shape of the geoid - the Earth level surface from which heights above sea level are counted - after the NGA EGM2008 model. While the row is on, the globe heights are the geoid heights above the ellipsoid, from -107 to +86 m, stretched 10 000 times, and the Earth looks crumpled. Bulges stand where gravity is stronger, for example near New Guinea and in the North Atlantic, hollows where it is weaker, the deepest one south of India. Terrain, water and the haze over the surface are removed for this time, the atmosphere glow at the edge of the globe stays. The Scale slider in the ⋯ menu of the Geoid row stretches the heights from 1000 to 20 000 times. The Earth cutaway in this mode reaches the crumpled surface, all shells are stretched in the same proportion. Switching the row off brings back terrain, scale and sea depths. A click in the Identify mode shows the geoid height above the ellipsoid at the point in the Geoid group.

The Mineral deposits layer shows mineral deposits, mines and occurrences of the U.S. Geological Survey (USGS) from three datasets. The MRDS database is about 300 thousand points, about 267 thousand of them in the USA and about 1400 in Russia, USGS has not updated it since 2011. Major mineral deposits of the world (USGS OFR 2005-1294) is 3161 deposits, 300 of them in Russia, they show as large points. World mines and plants (USGS Mineral operations outside the United States) is 6478 mines, processing and metallurgical plants outside the USA for 2006-2010 with the operator and capacity, among them the Verkhnekamsk

deposit, the North Urals bauxite and the Saranovsky chromite complex. For some records the place is given by district, the information window then says approximate, by district. The point colour is the group of the first commodity, the group scale is in the lower left corner of the view. The size of an MRDS point is the development status, a producing mine is larger than an occurrence. A click on a point shows the name, commodities, type, status, operator, capacity, country and a link to the USGS record, the Identify mode is not needed for it. Earthquake foci, fires and satellites open the same way. The first switch-on downloads the USGS archives, about 25 MB, and parses them in a background thread, which takes 15-20 s. The result is kept as a file in the QGIS profile, later switch-ons read it in 1-2 s. Over a large area, for example the whole USA, no more than 80 thousand points show. The major deposits, world mines and plants come first, then the rest. Large points are drawn over small ones.

The Mining areas layer shows outlines of open pits, waste dumps, tailings and industrial sites of the world - about 45 thousand areas outlined on Sentinel-2 images of 2019 (Maus et al., 2022, CC BY-SA 4.0). The outlines lie as an orange fill in the tile image. A click on an outline shows the country and area. The first switch-on downloads a file of about 25 MB into the QGIS profile.

The OSM mines and quarries layer shows mines, shafts and quarries from OpenStreetMap with their names. They load for the place of the view when the camera is below 150 km - an area of about 100 km around the look point in one request to an Overpass server. The point colour is the commodity group from the resource tag, without it the point is white, Other. A click on a point shows the name, kind, operator and a link to the OpenStreetMap object. In busy hours the Overpass server answers with a delay or a refusal. The request then repeats by itself on another Overpass server or on the same one after a pause.

The Energy category of the catalogue holds the Power plants, OSM power lines, cables and pipelines and Submarine cables layers.

The Submarine cables layer shows submarine communication lines in turquoise and submarine power cables in purple from any altitude. The data is OpenStreetMap, extracted on 11 October 2026 - 909 communication lines and 1040 power cables longer than 5 km. OSM holds part of the world's cables, most of them in the Atlantic and near Europe. A click on a line shows the name, kind, owner and a link to the OpenStreetMap object.

The Power plants layer shows about 35 thousand power plants of the world from the WRI Global Power Plant Database, data as of 2021 (CC BY 4.0). The point colour is the fuel, the size is the capacity. The points are visible from any altitude, a click on a point shows the name, capacity, commissioning year, owner and a link to the source of the record. Some plants are placed wrongly in the database. The first switch-on downloads an archive of about 4 MB, the result is kept as a file in the QGIS profile.

The OSM power lines, cables and pipelines layer shows power lines, substations, cables and pipelines from OpenStreetMap. A power cable, underground or under water, is a purple dashed line, a communication line is turquoise. The line colour and width show the voltage class - 500 kV and above, 220-330 kV, 110-150 kV or below. A pipeline is dashed, its colour shows the substance - gas, oil and products, water and heat. A substation is a square in the colour of its voltage. The objects load for the place of the view when the camera is below 150 km, the same way as the OSM mines. A click on a line or substation shows the kind, voltage, substance, owner and a link to the OpenStreetMap object.

The Earthquakes layer shows earthquakes of magnitude 4.5 and above over the last 30 days from the feed of the U.S. Geological Survey (USGS). The feed is loaded each time the row is switched on. A circle marks the epicentre on the surface. The colour of the circle shows the focus depth, from red near the surface to purple at 700 km, the scale is in the bottom left corner of the view. The circle grows with the magnitude. Foci on the far side of the Earth are hidden. A focus is seen at its depth in the removed sector of the Earth cutaway row -

there the circle sits at the focus. The depth is stretched by the vertical exaggeration of the terrain, like the heights. Each event has a time. With the row on, the time slider becomes available, and it shows the events of the chosen interval. The row exists only on the Earth.

The Earth cutaway layer removes a sector of the Earth under the look-at point. The sector is a quarter of a hemisphere 90° wide in longitude, from the equator to the pole of the hemisphere of the look-at point. Its three faces are coloured by shells after the radii of the PREM model. These are the crust to 24.4 km, the upper mantle to 400 km, the transition zone to 670 km, the lower mantle to 2891 km, the outer core to 5149.5 km and the inner core. The shell scale is in the bottom left corner of the view. The edge of the faces lies on the ellipsoid, the depths are not stretched by the vertical exaggeration. The crust on the faces comes from the CRUST1.0 model in 1° cells. These are water, ice, upper, middle and lower sediments, upper, middle and lower crust, below the Moho the mantle begins. The crust is 6-7 km thick under the ocean and about 70 km under Tibet. Continental and oceanic crust have different colours, the oceanic crust is grey-green. The crust type comes from the P-wave speed in the upper crust of the same model. In the oceanic crust it is below 5.5 km/s, these are basalts. Where a face crosses a subduction zone, the subducting slab from the Slab2 model of the U.S. Geological Survey shows on it as a band from the upper surface of the slab down by its thickness. Slabs exist in 27 zones. The file of a zone is requested when a face touches it, the loading icon shows this. The model is downloaded from the site of its authors when the row is first switched on, until then the crust is the 24.4 km PREM layer. If the model has not arrived, the first row of the scale names the reason, and the crust stays a layer of constant thickness. The next time the row is switched on, the model is requested again. The received archive is saved to the PlanetX folder of the QGIS profile, later sessions take it from there without the network. If the authors' site does not answer, the archive crust1.0.tar.gz can be downloaded with a browser from https://igppweb.ucsd.edu/~gabi/crust1/crust1.0.tar.gz and put into this folder under the same name, then the Earth cutaway row is switched off and on. QGIS opens the profile folder with the menu item Settings - User Profiles - Open Active Profile Folder, the PlanetX folder lies in it. The crust layers can be told apart up close, where the depths on the faces are true. As the camera moves away, depths to 400 km are stretched so that the crust stays visible. At the surface the stretch reaches 8 times, towards 400 km it fades out, below the scale is true. The shell scale shows the factor, earthquake foci are stretched the same way. The Stretch the crust item of the «⋯» menu of the Earth cutaway row in the Layers section turns the stretch off, then all depths are true at any distance. The Mantle tomography item of the same menu colours the mantle on the faces after seismic tomography - the deviation of the shear wave speed from the PREM model after the SEISGLOB2 model (Durand et al., 2017). Red mantle is slower and usually hotter, blue mantle is faster and colder, the legend runs from -2 to +2 %. Slow columns show under Iceland and Hawaii, a fast sinking slab under Japan, and two large slow regions at the core boundary under Africa and the Pacific. The model is downloaded from the EarthScope site on the first switch-on, about 28 MB, and kept as a file in the QGIS profile. The crust and the core on the faces keep their colours.

The CRUST1.0 crust to the QGIS project item of the same menu writes the crust surfaces within the view frame into a chosen folder - GeoTIFF rasters of elevations in metres above sea level with a 1° step. There are seven surfaces - the tops of the upper, middle and lower sediments, the tops of the upper, middle and lower crust and the Moho. The rasters go into the project as the PlanetX - CRUST1.0 crust group. The sediment and crust layers of CRUST1.0 are set apart by seismic wave speed, they are not stratigraphy. Where a layer is absent, its top matches the top of the next one. Near Perm, for example, the top of the upper crust lies at -3850 m and the Moho at -40 870 m. The rasters can be shown on the globe with the Surface by elevations item of the raster menu. Labels of places in the removed sector are not shown. The sector is placed anew each time the row is switched on. The corners of the sector are marked with points showing their latitude and longitude, and they can be dragged with the mouse. A corner changes its own longitude and its own latitude. If the latitude is neither 0° nor a pole, the lower or upper face becomes a cone towards the centre of the Earth. The row exists only on the Earth.

The Section down… item in the menu of a path in My Places opens the Section window. It shows a section of the Earth down along the path. The distance from the start of the path runs across, the depth runs down. The section shows the CRUST1.0 crust layers, the PREM shells, the Slab2 slabs and earthquake foci from a band along the path. The colours are those of the Earth cutaway faces, the layer scale is to the right of the chart. The Depth list sets the depth of the section, from 100 km to the centre of the Earth. The Foci band field sets the width of the band. A focus is moved onto the section at the nearest point of the path. While the Historical earthquakes row is on, the foci of the ISC-GEM catalogue since 1904 are put onto the section too. They have a light outline and lie under the foci of the 30-day feed, the line under the chart counts them separately. With the time slider open, the section shows only the foci of its interval, as on the globe. The section is rebuilt when the handles stop. The cursor over the chart marks the point on the globe and shows the Moho and slab depths there. The crust, the slabs and the earthquake feed are loaded when the window opens, if they are not there yet, the line under the chart tells what is still loading. While the window is open, a wall of the same section hangs along the path on the globe. It shows through the surface, its depths are true. When the window closes, the wall disappears.

Base map and a tile source of your own

The menu of the Base map row lists Esri World Imagery, OpenStreetMap, the added ready sources and the XYZ Tiles connections of the QGIS browser, the chosen base map is checked. A choice changes the base map on the globe at once. On other bodies the row shows the imagery of the body, there is no choice.

From the first opening the menu already has Google Satellite, Yandex Satellite, 2GIS Map, Esri Physical, Esri World Hillshade, NASA Blue Marble and USGS Imagery (USA). The terms of Google, Yandex and 2GIS do not allow taking their tiles in third-party programs, so the first choice of such a base map shows a warning with a link to the terms of the service. Without consent the base map does not change.

All base maps with previews are gathered in the Base maps category of the Add data catalog, a click on a row sets the base map of the globe. The More base maps… item of the Base map menu opens the catalog on this category. The Local data category of the same catalog holds detailed imagery of separate areas from the services of their owners. The first row is the spring 2020 orthophoto of nine counties around Philadelphia (PASDA DVRPC 2020). The row sets the base map, outside the area the globe shows Esri imagery.

The ready sources of the Base maps category are set with one click:

Source	What it shows	Warning
Google Satellite, Hybrid, Map, Terrain	imagery, imagery with labels, map, map with hill shading	yes
Bing Aerial, Map	Microsoft imagery and map	yes
Yandex Satellite, Map	Yandex imagery and map	yes
2GIS Map	city map	yes
OpenTopoMap	topographic map from OpenStreetMap and SRTM, up to level 17	no
Esri World Topo Map	Esri topographic map	no
Esri World Street Map, Light Gray Canvas, Dark Gray Canvas, National Geographic, Ocean, World Terrain, Shaded Relief, Physical, World Hillshade	Esri maps, the ocean, terrain and shaded relief maps up to level 13, the physical map up to 8	no
OSM Humanitarian, OSM France, CyclOSM	maps from OpenStreetMap - humanitarian, French and cycling	no

Source	What it shows	Warning
NASA Blue Marble	cloud-free image of the Earth with shaded relief and depths, up to level 8	no
USGS Imagery, Imagery Topo, Topo, Shaded Relief	maps of the US National Map, the USA only, up to level 16	no

The terms of Google, Bing, Yandex and 2GIS do not allow taking their tiles into third-party programs by the direct address. Before the first addition of such a source the window says so and gives a link to the service terms. The source is added only by the Add button, the decision and the responsibility for its use stay with the user. The window keeps the answer and does not ask a second time. Yandex imagery is made in another projection, the elliptical Mercator. The plugin builds a globe tile from two Yandex tiles and recomputes it by latitude, otherwise near Perm the imagery would lie 36 km south of its place. An added ready source stands in the base map list and in the Data sources window, where the Remove button takes it out of the list. The Search line finds ready sources too - by name, for example yandex or bing.

The assistant sets a base map as well - a ready source or a template address of your own, if asked, for example, "set Bing imagery". A ready source goes through the same warning, an address of your own is first shown to the user and added only after the Yes answer.

The Map overlays category of the Add data catalog lays transparent maps over the base map - OpenSeaMap sea marks, Waymarked Trails hiking and cycling routes. Several can be on at once, the opacity is in the ⋯ menu of the row, To QGIS project… adds an XYZ tile layer. Sea marks are seen close up, from the scale of about 1:500 000.

The Add tile source… item of the menu opens the new source window. The Address field takes an address in any of these forms:

- a template with `{z}`, `{x}`, `{y}`, for example `https://{s}.tile.opentopomap.org/{z}/{x}/{y}.png`
- the address of one tile copied from a browser, for example `https://server.arcgisonline.com/ArcGIS/rest/services/World_Topo_Map/MapServer/tile/5/10/17`
- an address with the level, column and row in the query
- the address of a WMS service, for example `https://imagery.pasda.psu.edu/arcgis/services/pasda/DVRPC2020/MapServer/WMSServer`

The window turns the address into a template and suggests a name from the server name. Below it builds a mosaic of the whole world from four level 1 tiles. If north is at the bottom of the mosaic, the server rows go from the bottom up, the box Rows from the bottom up (TMS) fixes this. The window finds the most detailed level itself by asking for tiles at the look point of the globe. No-data placeholders do not count. The source credit is in the corner of the view and on snapshots, for known servers it is filled in by itself.

The source is saved as a QGIS XYZ Tiles connection and becomes the base map at once. It is also visible in the QGIS browser, where it can be edited or removed. The owner of the tiles sets their terms of use.

The window recognises a WMS service address by the words `WMSServer`, `/wms` or `service=WMS` and reads the layer list of the service (GetCapabilities). The layer is chosen in the Layer list. The All layers row shows all layers of the group together. Instead of the mosaic the window shows one picture of the layer extent. The globe asks the service for a picture of every tile in the Web Mercator projection (EPSG:3857). Many services cover only their own area. Outside the layer extent and at small scales the globe shows Esri World Imagery, at the edge of the area the service picture lies over it. Such a source is kept in the PlanetX settings, not as a QGIS connection. It can be edited or removed in the Data sources window. A WMS service draws every picture anew, so a base map from it loads slower than tiles.


Rosreestr cadastre

The Rosreestr cadastre row of the Map category of the Add data catalogue puts over the imagery the land parcels from the National spatial data system of Rosreestr (NSPD, nspd.gov.ru) - borders in red, parcels with a pale fill. Data exist only for Russia. Parcels are seen up close, from about 10 km and lower. Coarser tiles are not requested, they hold thousands of parcels. The service refuses frequent requests in a row, so the plugin asks for tiles one at a time with a 0.5 s pause, the view fills with parcels in 30-60 s. The NSPD server certificate is issued by the certification centre of the Russian Ministry of Digital Development, which Windows does not trust by default. The Ministry root certificate lies in the plugin and acts only on the plugin requests to nspd.gov.ru, it is not installed into the system or the rest of QGIS. The layer opacity is set by the slider of its row in the Layers list. The credit Rosreestr NSPD is in the corner of the view.

With the cadastre on, a click in the Identify features mode or the Point details item of the globe menu asks NSPD about the parcel under the point. The Features window shows the Rosreestr cadastre group. It holds the cadastral number, the address, the area, the land category and the permitted use. It also holds the form of ownership, the type of right, the cadastral value with its dates, the status and the cadastral block. The parcel outline is highlighted on the globe. The NSPD map row leads to this parcel on the Rosreestr map. A double click on a row of the Features window copies the value, for example the cadastral number, to the clipboard and opens a link in the browser. One request goes per click, the information arrives in 1-3 s.

3D buildings

The 3D buildings row of the Layers section puts OpenStreetMap buildings on the globe as blocks. Outlines and heights come from the same OpenFreeMap vector tiles as the vector base. The row is off by default.

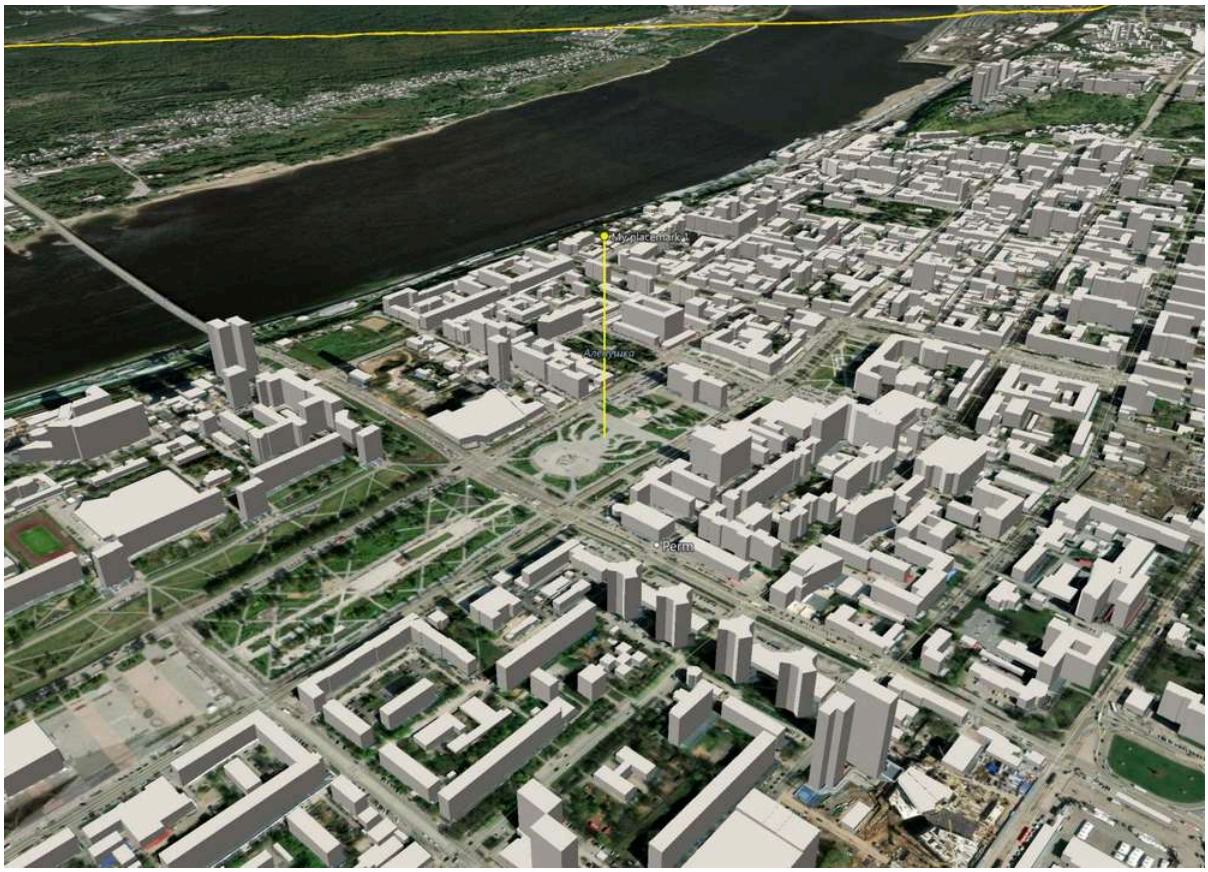


Buildings show when the camera is closer than 6 km to the ground. The globe keeps up to 32 building tiles around the camera, the nearest first. Tiles behind the camera are not loaded.

The height of a building is its height in OpenStreetMap, otherwise the number of floors times 3.66 m. A building without either gets a height of 5 m. In the centre of Perm two thirds of the buildings have a height of their own, in the centre of Moscow almost all. In the outskirts many houses have the same height. The colour of a building comes from OpenStreetMap, otherwise the building is light grey. Roofs are flat.

The bottom of a building stands at the lowest point of the terrain under its outline. A view snapshot waits until all buildings of the frame are loaded. A scene remembers whether buildings are on.

The 3D buildings list in the Own vector base group of the Data sources window switches the source of buildings to Overture Maps. These are OpenStreetMap buildings together with the open sets of Microsoft, Google Open Buildings and Esri in one PMTiles archive. Where OpenStreetMap is incomplete, there are more buildings. Over Lagos the same 22 tiles hold 158 thousand Overture buildings, the base has about 45 thousand in half of these tiles. The height of an Overture building is its height field, otherwise the number of floors times 3.66 m. The globe takes the latest Overture release from its catalogue. The Overture credit stands in the corner of the view while its buildings are on the globe.

View properties

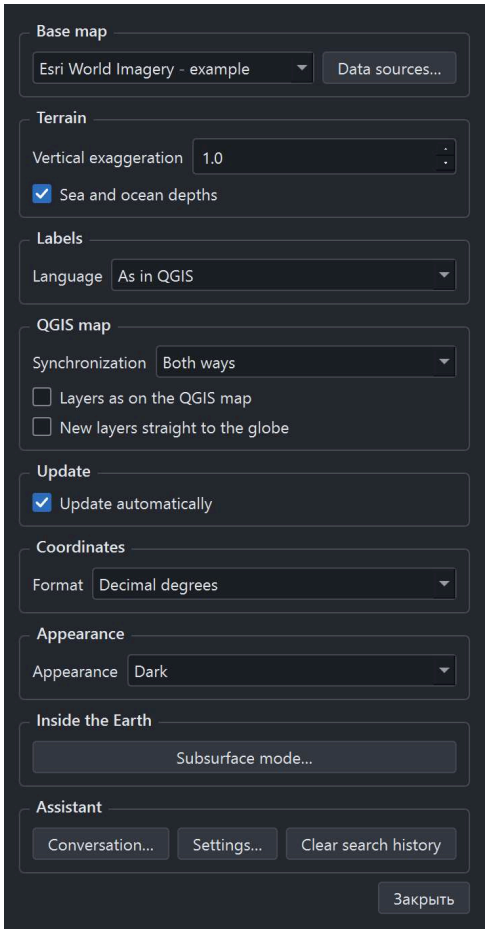

The View properties icon on the icon bar opens the View properties window. The window does not block work with the globe.

Group	Field	What it sets
Base map	List	Source of imagery or map
Terrain	Vertical exaggeration	Height multiplier from 0.5 to 10
Terrain	Sea and ocean depths	The floor at its depths with water above it, on by default

Group	Field	What it sets
Labels	Language	Language of labels and search
QGIS map	Synchronization	Direction of the link with the map
QGIS map	Layers as on the QGIS map	The globe shows the layers switched on in the QGIS legend
QGIS map	New layers straight to the globe	A new project layer is checked on the globe at once
Update	Update automatically	The globe refreshes after every change without the Refresh button, on by default
Coordinates	Format	Decimal degrees, degrees-minutes-seconds, UTM or MGRS in the status line and the Features window. North of 84° and south of 80° UTM and MGRS are replaced with decimal degrees
Look	Look	Dark (the default) - dark plates on the view and dark module windows. Light - grey plates with dark icons and light windows. As in QGIS - dark plates, module windows in the QGIS look. The look changes at once
Inside the Earth	Subsurface mode...	Opens the Subsurface mode window, see Subsurface mode

The default base map is Esri World Imagery, listed as an example. Esri sets its terms of use. OpenStreetMap comes next, then the XYZ Tiles connections from the QGIS browser. Terrain connections are not listed. A new connection appears in the list the next time the window opens.

The Data sources... button next to the base map list opens a window with all globe sources. Its table lists by groups the base maps, terrain, vector base, NASA data and Earth science data. Each source shows what it gives and an open link to its terms of use. The Check button requests one tile or file from each source bypassing the cache and writes the answer time and size or an error. Large files, the star sky image, are not requested.

The same window sets own terrain - a height tile template with {z}, {x}, {y} in Terrarium or Mapbox Terrain-RGB encoding - and an own vector base - a TileJSON address in the OpenMapTiles schema. Each has a credit for the view corner. Apply takes the data from the new address, Reset returns the default source. The Add base map..., Edit... and Remove buttons work with the QGIS XYZ Tiles connections, a removed connection disappears from the QGIS browser too.

The Terrain - where the heights come from group of the same window explains that the heights are built from four layers - the world height tiles, the 30 m land refinement, the GEBCO sea depths and an own raster of the project. The 30 m land refinement list puts a 30 m terrain model over the height tiles:

- No - height tiles only - the Mapzen Terrain Tiles relief, as before. It loads the fastest. North of 60° on land its data is about 250 m.
- Copernicus DEM 30 m - the Copernicus GLO-30 surface model, files per degree on the open AWS storage. Forest and buildings are part of the height.
- GEDTM30 30 m - the model of the bare ground without forest and buildings, OpenGeoHub, CC BY 4.0. It is one large file, its pieces take longer to read.
- ALOS AW3D30 30 m - the JAXA surface model, like Copernicus, forest and buildings are part of the height.
- NASADEM 30 m - the improved SRTM without voids, NASA, only between 60° S and 60° N.
- USGS 3DEP 10 m - the model of the bare ground without forest and buildings, the USA only.

The ALOS, NASADEM and 3DEP files are copies on Microsoft Planetary Computer. The plugin takes a temporary access key to them without an account. Outside the coverage of a model the height tiles remain.

The height tiles still give the sea floor and the view from afar. From level 9 the model gives the land heights, deeper than level 12 the model pieces are not read again but resampled from the ones already read. The model credit stands in the view corner. The model is read from the network for every new area, without the network the height tiles remain. At Mount Narodnaya the height tiles give 1816 m, Copernicus and GEDTM30 give 1888 m, ALOS AW3D30 gives 1892 m, the summit is 1895 m. At Pikes Peak in the USA 3DEP gives 4302 m with the summit at 4302 m.

The Sea depths list chooses the floor of seas and oceans:

- Height tiles - sea floor up to level 10 - the floor from the same Mapzen tiles. Closer than level 10 they have empty spots at zero in the open sea, for example at the Japan Trench.
- GEBCO 2026 - a grid of about 450 m - the GEBCO 2026 Grid of world depths, public domain with a credit of the source. From level 5 it replaces the floor of the tiles where both the tile and the grid are below zero, the land and the shore stay from the tiles. The grid is read from the network by areas. This is the default.

The label language is chosen from a list. As in QGIS takes the QGIS interface language, Local names keep the names in the language of the country. Fifteen languages follow. When there is no name in the chosen language, Latin-script languages get the Latin name, the others the local one.

Labels of a new place load when the camera stops. During a flyover and a flight their loading takes no time from the frames, at a stop they appear in a fraction of a second.

Without automatic update a change of base map, terrain exaggeration or project layers shows after the Refresh button on the icon bar. The status line reminds about it. The label language changes at once.

QGIS project section

The QGIS project section stands between Places and Layers. It lists the layers of the current project in the order of the QGIS map, each with its type - raster, points, lines, polygons, point cloud or table. The check box of a layer shows it on the globe and does not change its visibility on the map. In a new project the boxes are clear. The checks are stored in the project.

Layers lie on the globe as a picture drawn by QGIS, with the styles of the map. The picture lies on the terrain, it cannot be raised or extruded.

Labels of vector layers come separately, like city names. They stay level at any turn and tilt, do not overlap and hide behind mountains and the horizon. The text, colour and size come from the layer labels in QGIS, rule-based labels too. A point label stands to the right of the point, a line label at its middle, a polygon label inside it. Features around the view point are labelled, at most 500 per layer. The scale visibility of QGIS labels is not used on the globe.

A double click on a layer flies to its extent, looking straight down. The right-click menu:

- Fly to - a flight to the extent of the layer.
- Transparency slider - the transparency of the QGIS layer itself, it changes on the map too.
- Track... - for point layers, see Tracks.
- Globe terrain - for rasters, see Own terrain.
- Extrusion... - for vector layers, see Extrusion by field.
- To My Places... - for vector layers. The layer features go into My Places as a folder named after the layer, the selected ones, otherwise all. The folder can then be saved to KML, see KML and KMZ.
- Point colour, Point size, Point classes - for point clouds, see Point clouds.
- Layer Properties... - the standard QGIS layer properties window.

OpenAerialMap images

The OpenAerialMap images… item of the menu on the globe opens a window with drone and aerial images from the open OpenAerialMap catalogue. The search runs in the view, newest images first, the Search the view button repeats it for the current view, More adds older images. The frames of the images are visible on the globe, the frame of the selected image is brighter. Images cover the world unevenly, a small view often has none.

The list shows the date, title, pixel, file size and licence. Each image has its own licence - CC BY 4.0, CC BY-SA 4.0 or CC BY-NC 4.0, images with NC are for non-commercial use only. The To QGIS project button puts the image as a tile layer into the PlanetX - OpenAerialMap images group and checks it on the globe, the provider and licence go to the layer rights. The image file is not downloaded, so such a layer does not serve as a source for raster calculations. Some images have a white field outside the survey, this is how they were uploaded to the catalogue.

Point clouds

A point cloud is a lidar or drone survey in a LAS, LAZ or COPC file. It is added to the project as an ordinary QGIS point cloud layer and checked in the QGIS project section. On the globe the cloud stands as points in space at their own elevations, with depth testing, like 3D models.

The points are read by the PDAL program shipped with QGIS, in separate processes, and the window does not wait for them. A COPC file is read at once. A LAS or LAZ file is converted to COPC once, the copy goes to the PlanetX/pointclouds folder of the QGIS profile, the source file does not change. A drone tile of 5.7 million points is converted in about 15 s, later views take the copy.

The detail of the cloud depends on the distance. The cloud is divided into cells, near cells are smaller and hold more points, far cells the other way round. A frame holds at most 3 million points. While cells load, the loading icon to the right of the icon bar is shown.

The elevations of the cloud are converted to metres by the coordinate system of the file, for example from feet. With terrain the heights are stretched by the terrain scale, like 3D models, without terrain the cloud stands with its bottom on the surface. The points are moved slightly towards the eye, about 0.5 % of the distance. The globe terrain is smoothed over tens of metres, and without this the ground points of the survey would go under it.

The menu of a cloud layer:

- Point colour - the survey colour (RGB from the file, without it - by class), by ASPRS class, by height from blue to red or by intensity in shades of grey.
- Point size - from 1 to 6 pixels.
- Point classes - all classes, ground only or chosen classes among those met in the cloud.

The legend in the corner of the view shows the classes of the cloud or the heights in metres. A click in the Identify features mode gives the cloud point under the cursor - class, elevation, latitude and longitude, intensity, return number and colour. The cloud settings are stored in the project.

Lidar point clouds over the network

The Lidar point clouds item of the menu on the globe finds tiles of open lidar surveys at the point and puts them as point cloud layers into the PlanetX - lidar point clouds group of the project, the layers are checked on the globe at once. There are two sources:

- IGN LiDAR HD - all of France in 1 km tiles, at least 10 points per square metre, ASPRS classes, Licence Ouverte 2.0. The two nearest tiles of the point are taken.
- USGS 3DEP - US surveys in tiles of about 1 km, public domain. Up to four tiles of the point are taken, one place sometimes has several surveys of different years.

The COPC files are not downloaded whole, PDAL and QGIS read them in parts over the network. The 3DEP files lie in the Microsoft Planetary Computer storage, the module asks the service for the access key itself, without an account. The key lives an hour, after that the layer in the QGIS project stops reading, the globe takes a new key. The IGN server limits the request rate, so IGN clouds come slower, cells after a server refusal are asked again in 10 s. Near Grenoble two IGN tiles give about a million points in 2-3 minutes. Clouds over the network open in QGIS 4, in QGIS 3.36 opening such a layer stops QGIS, and the menu item says so.

Extrusion by field

Features of a project vector layer rise above the terrain to a height from a numeric field. A polygon becomes a prism, a point an octagonal column, a line a wall. The Extrusion… item of the layer menu opens a window with the height field and a factor. The height in metres is the field value times the factor. For a field of storeys the factor is about 3. A feature with an empty, zero or negative value is not extruded. The No extrusion row removes the extrusion.

The colour of a feature is its symbol in the QGIS layer style, as on the map. The bottom of a prism and a column lies at the lowest terrain point under the feature, the roof is flat. A line wall follows the terrain. The column radius is 1/150 of the layer span, from 2 m to 2 km. The layer is extruded while it is checked on the globe. The settings are kept in the project. Up to 20 000 features of a layer are read.

Own terrain

A height raster of the QGIS project becomes the globe terrain within its extent. An example is a quarry with a mine survey. The Globe terrain item of the raster menu in the QGIS project section turns the inset on and off. The raster can be in any coordinate system, it needs a file that GDAL reads. The checkbox that shows the layer on the globe is not needed for the inset.

Where the raster has data, its heights replace the common terrain. Along a band at the edge of the data the heights change smoothly to the common terrain, the band is 5 % of the smaller side of the extent. Within the extent the terrain is more detailed than the common one, down to the raster pixel, but not finer than the pixel of level 17 (about 0.6 m at latitude 60°). The raster heights are taken as they are. If the survey has its own height system, the band at the edge smooths the difference with the common terrain.

The inset is seen by the surface mesh, the height under the cursor, the ruler, the elevation profile, the viewshed, the insolation, the slope and the aspect. With several insets the one higher in the project lies on top. The choice is kept in the project and in the scene.

On the first switch-on the raster is converted into a file of the QGIS profile. For a survey of 2400 × 2400 pixels this takes about 2 s.

Cut and fill

Two surveys of one site, for example a quarry with dumps, give the cut and fill volumes. The Cut and fill… item of the menu of the new survey raster in the QGIS project section opens a window:

- Earlier survey - a raster of the same site at an earlier date.
- Site - polygons outside which the difference is not computed, or the whole extent of the new survey.
- Threshold - a difference smaller than the threshold in absolute value does not enter the volumes, it is survey noise. The default is 0.1 m.

The earlier survey is resampled to the grid of the new one. The computation goes in metres, in the coordinate system of the new survey or in the UTM zone if it is in degrees. The summary window shows the cut and fill volumes, their areas, the greatest cut depth and fill height and the difference of the volumes. The difference raster goes into the project in the PlanetX - cut and fill group and is shown on the globe, the cut in red, the fill in blue.

Own bathymetry

A raster of depths or bed elevations of a lake, sea or reservoir goes into the globe terrain like own terrain, and semi-transparent water at the water body level is drawn above it. The Water body bathymetry… item of the raster menu in the QGIS project section opens a window with three fields:

- Values are depths - the depth below the water surface, with a plus or minus sign. The bed elevation is the water level minus the absolute depth.
- Values are bed elevations - the bed height above sea level.
- Water level - the height of the water surface. The default is the terrain height in the middle of the raster, for a lake it is usually the water surface.

The water is drawn over all raster points where the bed is below the level, the bed is seen through it. Without terrain no water is drawn - the bed and the water would lie in one plane. Remove bathymetry turns off both the inset and the water. The choice is kept in the project. The elevation profile across the water body shows the water above the bed and a dashed line of the water body level with a label.

The Lake Brienz, own bathymetry demo of the Demo icon is the bed of Lake Brienz in Switzerland from swisstopo swissBATHY3D data with a 10 m step, water at 564 m. The deepest point is 308 m, 256 m below the water. The elevation profile across the lake shows the basin.

Bathymetry from soundings

Echo sounder soundings are a point layer of the project with the depth in a field or in the point Z, for example a CSV with latitude, longitude and depth opened in QGIS as a delimited text layer. The Bathymetry from soundings… item of the point layer menu builds a depth raster from them and makes it own bathymetry. The window sets:

- Depth - the field with the depth or the point Z. The sign of the depth does not matter.
- Cell - the raster cell size. The default is the square root of the sounding area per point. For tracks 20 m apart with a point every metre it is 5 m.
- Limit from sounding - a cell farther than this distance from the nearest sounding stays empty. The default is 10 cells. The limit has to be larger than the distance between tracks.
- Water level - the water height on the day of the soundings.
- File - the GeoTIFF of the depth raster, by default in the QGIS profile.

The raster is built by triangulation in metres of the UTM zone of the middle of the soundings and goes into the project in the PlanetX - bathymetry group.

Places section

The section holds the My Places folder, described in the chapter My Places.

Link with the QGIS map

Synchronization

The synchronization icon on the icon bar links the globe with the QGIS map window. The direction is chosen in the view properties:

- Both ways - the default.
- Map leads the globe - the globe moves to the map extent and keeps its tilt and heading.
- Globe leads the map - the map centers on the look-at point of the globe once the globe stops.

Any map coordinate system works. The map width on the ground equals the width of the globe view.

Selection

Features selected on the QGIS map are highlighted on the globe.

Identify features

The Identify features icon turns identify on, the cursor becomes a cross. A click on the globe puts a pin with the coordinates and opens the Features window.

- The top of the window shows the coordinates and elevation of the point.
- Below are the project layers checked on the globe, their features under the point and the feature fields. A raster shows its values at the point.
- The Select on map button selects the found features in the QGIS layers. The selection shows on the map, in the attribute table and on the globe.
- The My Places group lists the visible placemarks, paths and polygons under the point. Each shows its type, coordinates or length, measurement and description.
- The Earthquakes group lists the foci near the click point on the screen. Each shows its magnitude, depth, UTC time, place and the USGS event page.
- The Site group shows the elevation or sea depth, the Moho depth, the crust and sediment thickness, the crust type after CRUST1.0 and the Slab2 slab under the point. The crust model and the slab zone file load on the first click, the window updates when they arrive.

My Places

My Places is the folder at the top of the Places section, marked with a star. It holds placemarks, paths, polygons, saved views and measurements. The places are kept in one file `PlanetX/myplaces.gpkg` in the QGIS profile folder and are visible in any project.

The icon of a point placemark is always visible, even with thousands of placemarks on the screen. A label stands at the placemarks that have room for it, the other labels appear when zooming in.

Temporary Places

Below My Places stands the Temporary Places row. It is selected when the globe window opens, so new placemarks, paths, measurements and placemarks of the assistant go there. Drag a placemark to My Places to keep it at once. The row menu has Save to My Places and Clear Temporary Places….

If Temporary Places hold anything when the globe window closes, the window asks what to do with it. Save moves the contents to the end of My Places, Don't save deletes them, Cancel keeps the window open. Clear My Places… does not touch Temporary Places.

List rows

The row icon shows the kind of object - placemark, path, polygon, saved view or folder. A check box shows and hides the object on the globe, a folder check box does it for the whole folder. A double click on a place flies there.

Places and folders are rearranged by dragging, including from folder to folder. The tour follows the list order.

Several rows are selected with Ctrl and Shift. The selection is dragged together, and the Del key deletes it after a question.

The slider under the list changes the opacity of the selection - placemarks, paths, polygons, images and the whole contents of selected folders. It stands at the opacity of the selection, to the left is more transparent. A polygon fill stays more transparent than its line in the same share. The value is kept in My Places and in KML as the colour alpha, Google Earth sees it too.

Menus

Where	Items
My Places	Add, Play tour, Sort A-Z, Open KML or KMZ..., Save as KML..., Copy, Paste, Add the places layers to the project, Clear My Places...
Folder	Fly to, Add, Cut, Copy, Paste, Delete, Open KML or KMZ..., Save as KML..., Snapshot folder view, Sort A-Z, Play tour, Properties...
Place	Fly to, Tour along the path, Snapshot view, Properties..., New Folder, Cut, Copy, Paste, Delete
Several rows	Copy, Show selected, Hide selected, Delete selected
Empty space	New Folder, Open KML or KMZ..., Paste

Only paths have Tour along the path. The Add submenu creates a folder, placemark, path, polygon or recorded tour in the folder. The placemark, path and polygon are drawn in the New place window, the tour is recorded with the record button. Cut copies the row to the clipboard and removes it from the list, Paste puts it in a new place. Sort A-Z orders places and folders by name.

Folder properties

The Folder properties window opens from the folder menu:

Field	What it sets
Name	The folder name in the list
Allow the folder to be expanded	Without the box the folder does not expand in the list, the folder box shows and hides all its contents
Show contents as option buttons	One row of the folder shows on the globe, checking one clears the others
Hide beyond	All placemarks of the folder are visible only while the eye is closer than this distance. In KML the field is written as the Region of the folder
Description	Text about the folder, the tooltip of its row
View	Look point, range, heading and tilt, buttons Snapshot current view and Reset

A double click on a folder and Fly to in its menu fly to the folder view. Without a view of its own the flight frames all places of the folder. The view is set by hand with numbers on the View tab or by a snapshot. Snapshot folder view sets the folder view to the view of the globe. The description, the view and the way contents show go to KML and back.

A new folder appears at once with the name New Folder, the name is changed in the Properties... window. On a folder it is created inside, on a place right below it. A folder is deleted with its contents after a question.

Add the places layers to the project adds the three layers of the places file to the project - points, lines and polygons. Their attributes and undo are the standard ones.

New placemark

The New placemark icon opens a window with the tabs Placemark, Path, Polygon and Circle.

- A placemark is put with a click on the globe, a new click moves it.
- Path points and polygon vertices are put with clicks on the globe.
- A circle is set by two clicks - the centre and a point of the circle. Both points can be dragged with the mouse. The circle is saved as a polygon of 128 vertices along the circle on the ellipsoid.
- The Name field is filled at once with a numbered name - My placemark 1, My path 1, My polygon 1, My circle 1. Each kind counts on its own. The name can be changed in the same field.
- Color sets the color of the line and outline, the polygon fill has the same color, half transparent. Width is set in screen pixels.

The Save button writes the object to the selected folder of My Places. The window stays open for the next object. The Clear button removes the points put so far.

Vertices are shown as circles and are dragged with the mouse. The circle in the middle of a segment adds a new vertex there. A click on the first point closes the shape, and a path becomes a polygon. A click on the last point finishes the path. A hint stands at the cursor. After finishing, clicks add no points, and the vertices can still be edited.

Right-click menu on the globe

A right click on the globe opens a menu.

Item	What it does
Point coordinates, the first line	A click copies them to the clipboard in the format of the status line
Delete vertex	Removes the vertex of the drawn object under the cursor
Finish drawing, Continue drawing	Stops and resumes adding points with clicks
Properties...	Opens the properties of the placemark under the cursor
Add placemark	Opens the New placemark window with the point under the cursor
Measure distance	Opens the Ruler with its first point under the cursor
Fly to	Flies to the point with the same altitude and tilt
Orbit around	Flies to the point and circles it slowly, one turn a minute. Any mouse or key movement stops it

Item	What it does
Route start, Route end	The start and the end of a route, see Route
Point details	The Identify window for the point under the cursor without the Identify features mode. The Site group holds the address from Nominatim, the OpenStreetMap geocoder
Site analysis	A submenu with Slope and aspect..., Viewshed..., Insolation..., Shadows..., Land change..., Classification..., Similar areas..., Minerals by spectrum..., EMIT minerals... (the last seven only on the Earth), Earthwork..., Flooding..., Water flow... and Sea level... for the point under the cursor, see Slope and aspect of a square, Viewshed from a point, Insolation, Shadows, Land change, Classification, Similar areas, Minerals by spectrum, EMIT minerals, Earthwork and Flooding
Satellite images...	The Satellite images window for an area around the point under the cursor - Sentinel-2, Landsat, ASTER and MODIS, the satellite is chosen in the window, see Satellite images
Open in browser	A submenu of sites. An item opens in the browser the site at the point under the cursor, for example Google Maps or the weather forecast on windy.com. The Add or edit sites... item opens the list window. The Add site button puts a ready site - Google Maps, Yandex Maps, 2GIS, OpenStreetMap, Windy - or an empty row for your own address, a double click on a cell changes the name or the address. In the address `{lat}` and `{lon}` are the latitude and longitude in degrees, `{zoom}` is the map scale by the view. The address starts with https:// or http://, the list is kept in the QGIS settings
Map sheet designation	A submenu with map sheet numbers at the point. The International Map of the World 1:1,000,000 (IMW), the Russian designation at 1:1,000,000, 1:500,000 and 1:200,000, the NATO JOG 1:250,000 sheet and the MGRS 100 km square. A click on a row copies the number. The All numbers in a window... item opens a window with the same numbers

The shape of a 3D path, a 3D polygon and a tour is not edited this way. A placemark with a saved measurement loses the measurement text after its shape is edited.

Satellite images

The Satellite images window looks for scenes of the Sentinel-2 or Landsat satellites over an area and adds the chosen bands and indices to the QGIS project. The scenes are L2A, that is surface reflectance, 10-20 m per pixel. Two items open the window:

- Satellite images... of the globe menu takes a square around the point. The square side equals the width of the visible strip of the globe, from 1 to 100 km. The Area side field changes it.
- Satellite images... of the menu of a path or a polygon in My Places takes the area from the placemark. A polygon gives its outline, a path gives its bounding box.

The Acquired from and to fields set the date range. Scene cloud cover up to limits the cloud cover of the whole 110 × 110 km scene by the catalogue. Over the area up to limits clouds and shadows over the area itself. The window computes it from the SCL scene class mask after the search and hides scenes above the limit. The Find button fills the list, newest first. The columns are the acquisition date and time in UTC, the cloud cover over the area, the scene cloud cover, the Sun elevation and the MGRS tile. The chosen row shows a natural colour preview of the area.

The checkboxes of the product list choose what goes to the project:

Product	Bands	What it shows
Natural colour	B4 B3 B2	as the eye sees
False colour, near infrared	B8 B4 B3	vegetation in red
Agriculture	B11 B8 B2	crops and ploughland

Product	Bands	What it shows
Shortwave infrared	B12 B8A B4	moisture and burns, haze is almost transparent
Geology	B12 B11 B2	rocks and outcrops
Urban	B12 B11 B4	built-up areas and bare soil
NDVI - vegetation	(B8 - B4) / (B8 + B4)	green biomass
NDWI - open water	(B3 - B8) / (B3 + B8)	water above zero
NDMI - vegetation moisture	(B8A - B11) / (B8A + B11)	moisture in foliage
NBR - burned areas	(B8 - B12) / (B8 + B12)	burns lower, the difference of two dates gives burn severity
NDSI - snow	(B3 - B11) / (B3 + B11)	snow and ice above 0.4
All scene bands	B1-B12 and B8A	12 bands in one file for own computations

All scene bands is one GeoTIFF with all bands in the order of their numbers, each band in the file carries a name like "B8A nir08", it is seen in the QGIS layer properties. For Sentinel-2 these are the 12 bands of the L2A product (band B10 is not in it), the 20 and 60 m bands are resampled to a 10 m step. Landsat 8-9 has 8 bands, Landsat 4-7 has 7, the thermal band in the file is the surface temperature in kelvins. The layer shows natural colours, another combination is chosen in the layer properties without a new download. The file is large - for Sentinel-2 an area of 3 km takes about 1.5 MB, 20 km about 190 MB, so an area with a side over 20 km goes at a 20 m step with All scene bands.

The list at the bottom of the window chooses the method:

- Clip to the area, GeoTIFF writes float32 reflectance files to the folder set by the Folder... button. Pixels outside the polygon are empty. With the Clouds and shadows empty checkbox the pixels of clouds, shadows and snow by the SCL mask are empty too. The pixel size is 10 m, for a large area 20 or 60 m, so that a side stays within 4000 pixels.
- Whole scene by link, no download writes a VRT file, links to the scene bands on the network. Only band combinations go by link, indices go by clipping to the area. The method exists only for Sentinel-2.
- Whole scene, source files writes the scene files as they are, in the source values and resolution, to a scene folder inside the Folder... folder. These are all bands, the cloud mask and for Landsat the MTL metadata file. One VRT layer set of all bands goes to the project, it shows natural colours, for MSS and ASTER false colours, for MODIS the first layer of the product in grey. The checked products are not built then. A Sentinel-2 scene weighs about 1 GB, Landsat about 0.8 GB, ASTER 50-200 MB, MSS about 30 MB. For MODIS the files of all tiles of the day are downloaded. The status line shows how many files are downloaded. A file already downloaded is not downloaded again on a repeat. The method exists for all satellites of the list.

The To QGIS project button puts the layers into a group of the day inside the Sentinel-2 group. Band combinations are stretched by 2-98 % of the values, indices are coloured with their own scale. The layers are checked on the globe, their metadata carry the notice «Contains modified Copernicus Sentinel data» with the acquisition year. Loading a 3 km area takes 10-20 s.

The scene catalogue is Earth Search (Element 84), the images are Copernicus Sentinel-2 (ESA), Element 84 files on the open AWS storage. No key or account is needed.

The Satellite list at the top of the window switches to Landsat 4-9 - images since 1982, 30 m per pixel, surface reflectance and surface temperature of the Collection 2 Level-2 processing of the U.S. Geological Survey (USGS). The catalogue and the files are Microsoft Planetary Computer. The files are read with a

temporary access key, the window gets it from Planetary Computer by itself, without an account, and asks again every 45 minutes. When the key service has not answered three times, the line at the bottom of the window says so. Over the area, Landsat cloud cover is computed from the qa_pixel mask - clouds, cirrus and shadows. The tile column shows the satellite, the WRS path and row, for example "L9 167/020". The products are those of Sentinel-2 without band numbers, as Landsat 4-7 and 8-9 number them differently, plus Surface temperature, °C from the thermal band. This is the surface temperature of the USGS Level-2 product (ST_B10 of Landsat 8-9, ST_B6 of Landsat 4-7), not brightness temperature. USGS has already converted the radiance with the surface emissivity from the ASTER GED database and the atmosphere. The plugin converts the file value to kelvins by the scale and offset of the product and subtracts 273.15. Where the ASTER GED database has no emissivity, USGS does not compute the temperature. Over most of Russia that is half of the area or more, at Yakutsk in summer 2024 it is 86-100 %. The Temperature gaps by formula check box, on by default, computes such pixels by the same USGS formula from the radiance and atmosphere of the scene (the ST_TRAD, ST_ATRAN, ST_URAD, ST_DRAD layers), the emissivity comes from NDVI. It is 0.991 for water, 0.973 for bare soil and 0.986-0.99 for vegetation. Where USGS computed the value itself, the mean difference is below 0.5 °C, for 95 % of the pixels not above 1.9 °C. The layer description tells what share of the pixels the formula computed. The layers go to the Landsat group with the credit "Landsat N image courtesy of the U.S. Geological Survey". The Whole scene by link method is not available for Landsat - the key lives an hour, and a layer of a saved project would not open later. Landsat 7 images after May 2003 have empty stripes from an instrument failure. Over water, the near infrared reflectance of Landsat 4-5 can be above red, and the NDVI of water comes out about +0.1.

The action of the Search line by the words ASTER, minerals, kaolinite opens the window right on these images. The ASTER line of the same list gives ASTER images of the Terra satellite of 2000-2006 - 14 bands, visible and near infrared at 15 m, six shortwave infrared at 30 m, five thermal at 90 m. The catalogue and files are Microsoft Planetary Computer, no sign-in is needed. ASTER imaged on request, there are few scenes - 5 near Perm, 24 at Cuprite in Nevada. The VNIR and TIR bands work after 2006 too, but in the open copy imaging ends in 2006, later scenes exist only at NASA and in Earth Engine with a sign-in. If the search dates are later than 2006, the window sets 2000-2006 when this line is chosen. Products:

Product	Bands	What is seen
False colours (3N 2 1)	3N 2 1	vegetation is red, 15 m
Shortwave infrared (4 6 8)	4 6 8	rocks and minerals
Kaolinite, alunite	(4 + 6) / 5	argillic alteration
Sericite, muscovite	(5 + 7) / 6	sericitic alteration
Mg-OH and carbonates	(7 + 9) / 8	carbonates, chlorite, epidote
Iron oxides	2 / 1	hematite, goethite
Quartz	11^2 / (10 × 12)	quartz from the thermal bands
All scene bands	1-14	14 bands in one file

The band ratios are those used in ore exploration (Rowan, Mars 2003, Ninomiya 2003), the scale is stretched over the area, warm colours mean more of the mineral. At Cuprite the kaolinite and alunite index shows both known zones of altered rocks. The values are top of atmosphere reflectance and brightness temperature in K, computed for the normal band gain. The gain mode of a scene is not recorded in the open copy, with another gain the reflectance of a band differs by a constant factor, so ASTER gives no NDVI. ASTER L1T has no cloud mask, the cloud cover over the area is the cloud cover of the scene, the Clouds and shadows empty

check box is not available. Some scenes have no shortwave bands, products from them are not built then. The layers go to the ASTER group with the credit "ASTER data courtesy of NASA/METI/AIST/Japan Spacesystems and U.S./Japan ASTER Science Team".

The ASTER since 2007 - NASA, an Earthdata key is needed line gives ASTER images after 2006 from the NASA LP DAAC archive. The search in the NASA CMR catalogue goes without sign-in, the preview is the open picture of the whole scene. NASA gives the files only by an Earthdata key. The key is free, how to get and enter it is told in the NASA Earthdata key section. If NASA does not accept the key, the window erases it and asks for a new one at the next load. The files are read by temporary addresses that NASA gives. The ASTER shortwave bands failed in 2008, so these scenes have only the VNIR and TIR bands - false colours, iron oxides, quartz and 8 bands in All scene bands, the tile column says ASTER VNIR TIR. The 2026 scenes at Cuprite have no thermal bands either, then All scene bands holds the three VNIR bands, and quartz is not built. Night scenes with only thermal bands are not listed. The NASA catalogue knows only the scene frame, and the ASTER imaged strip is turned inside it. An area near the frame edge may lie beyond the edge of the image. Then the window adds no layers and says that the bands hold no data.

The action of the Search line by the words MSS, early images, old images opens the window right on these images. The Landsat 1-5 MSS line of the same list gives the oldest Landsat images - the MSS scanner, 1972-1993, 60 m per pixel, USGS Collection 2 Level-1 processing from the same Planetary Computer catalogue. Near Perm there are 778 scenes of 1973-1993. There are four bands - green, red and two near infrared, without blue and thermal. So the products differ - False colour, near infrared, All four MSS bands in one file, NDVI and NDWI. The values are top of atmosphere reflectance by the multipliers of the scene metadata file and the sun elevation, without atmospheric correction. NDVI from them is not directly comparable with NDVI of Landsat 4-9. Cloud cover over the area comes from the qa_pixel mask, for MSS it holds only clouds. If the search dates are later than 2013, the window sets the summer of 1975 when this line is chosen and returns the former dates when another satellite is chosen. Many MSS scenes have slanted stripes of failed lines - saturated pixels of one band and dips next to them. The window finds them by the qa_radsat saturation mask, by the ratio of a band to the others along the stripe and by spikes of one band and replaces them with the mean of the neighbouring sound pixels. Wide saturated areas - clouds and snow - stay as they are. The geolocation of all MSS scenes near Perm is class T2, coarser than that of Landsat 4-9. MSS images were added after a discussion with Nadezhda (https://github.com/nadiopt-cell), the author of QGIS plugins for loading satellite images.

The same Satellite list gives the ready MODIS products of the Terra and Aqua satellites, version 061, since 2000. The catalogue and the files are Planetary Computer, the window gets the access key itself:

- Temperature per day, 1 km and over 8 days - the daytime and nighttime surface temperature in °C (MOD11A1 and MOD11A2, MYD for Aqua).
- NDVI and EVI over 16 days, 250 m - the MOD13Q1 vegetation indices.
- Snow per day, 500 m - the snow share of a pixel in percent, MOD10A1, over 8 days - the classes no snow, snow and lake ice, MOD10A2.
- Burned areas by month, 500 m - the day of year of burning, MCD64A1.

A MODIS scene is a day or a period of one satellite. The MODIS tiles that the area touches are read together, the layers come in the UTM system of the area centre with the product step. The Over the area column of MODIS is the cloud share by the product quality band, for temperature the share of pixels without a value. MODIS has no cloud cover of the whole scene, its field is disabled. In winter at the latitude of Perm the daily products are often fully cloudy, the 8- and 16-day composites have fewer gaps. The layers go to the MODIS group with the credit of the product and the NASA archive, for example "MOD11A1 v061, NASA EOSDIS LP DAAC".

Time series

The "Time series..." button of the Satellite imagery window builds a chart of a value of the area over all scenes of the list, that is, over the found scenes that are not cloudier over the area than set. The value is chosen in the series window among the indices of the satellite - NDVI, NDWI, NDMI, NBR, NDSI, for Landsat also the surface temperature, for MODIS the temperature, NDVI, EVI and the snow share. A band composite is a picture rather than one value, and ASTER has no cloud mask, so they have no series.

A point of the chart is the median of the value over the area without clouds and shadows by the scene mask. The vertical bar runs from the 10th to the 90th percentile and shows the spread inside the area. The median moves less than the mean from remains of clouds and bad scan lines. A scene with clear pixels on less than 10 % of the area gets no point. The series is computed on a coarse grid - not more than 200 pixels along a side of the area, and the points appear as they are computed. Near Perm 43 Sentinel-2 scenes of a 2 km area took 1.5 minutes.

The cursor over a point shows the date, the median, the spread and the share of the area without clouds. A click on a point selects that scene in the list of the Satellite imagery window - its preview shows, and it can be added to the project at once. The "CSV table..." button writes the series to a file - the date, the scene, the median, the 10th and 90th percentiles, the share of the area without clouds. Scenes without a value are rows with empty fields.

An example - the centre of Perm, a 2 km area, Sentinel-2 over a year, NDVI. The winter points under snow are near zero, from May to October they are 0.15-0.22, a city has little vegetation. For a series over many years Landsat since 1982 or the 16-day MODIS NDVI are more convenient.

Trend map

The Trend map... button of the series window computes the trend of the value in every pixel of the area over the scenes of the series and puts it as a raster into the PlanetX - trend maps group of the project. For this the series is computed on one grid in all scenes, scenes of another UTM zone are reprojected into the zone of the majority.

- Band 1 - the Theil-Sen slope, the change of the value per year. It is the median of the slopes over all pairs of scenes of the pixel, remains of clouds hardly move it. The scale goes from red (decrease) through white to blue (increase), for temperature the other way.
- Band 2 - p of the Mann-Kendall test, whether there is a monotonic trend. A trend with p below 0.05 is significant.
- Band 3 - the number of clear scenes of the pixel.

A pixel without 6 clear scenes gets no trend. The test does not remove the seasonal cycle. A series of scenes of one season over several years, for example only July - August, gives the trend between years. A series of all months mixes the season and the trend - near Perm an NDVI series from November to October gives a rise of 0.27 per year, that is spring and summer, not a trend over years. The computation over 44 scenes of a 2 km area takes 2-3 seconds.

NASA Earthdata key

NASA gives ASTER images after 2006 only by an Earthdata key. The key is free, each user has a key of their own.

1. Account. Open https://urs.earthdata.nasa.gov/users/new and fill in the form - user name, password, email address, country, occupation. Confirm the email by the link in the NASA letter. If you already have an account, sign in at https://urs.earthdata.nasa.gov.

2. Key. On the profile page open the Generate Token tab at the top and press the Generate Token button. A long string of Latin letters, digits and dots appears - this is the key. Copy it whole.
3. Key in PlanetX. Right-click the globe at the place you need and choose Satellite images…. In the Satellite list choose ASTER since 2007 - NASA, an Earthdata key is needed. Press Find, choose a scene and press To QGIS project. The window asks for the key. Paste the copied string and press OK. The window keeps the key and does not ask for it again.

The key is valid for 60 days. When it expires, the line The Earthdata key was not accepted appears at the bottom of the window, and the window asks for a new one at the next load. The same Generate Token button makes a new key. The key is kept in the QGIS settings of this computer and goes only to the NASA server. Whoever knows the key loads data on behalf of its owner, so the key is not sent to anyone. A key that got into other hands is revoked by the Revoke button next to it on the same tab. The scene search and the preview work without a key too.

Route

A route by roads is built between two points on the Earth. The Route start item of the globe menu sets the start, Route end sets the end. With a point placemark under the cursor the route takes its point and name. When both points are set, the route is built by itself and goes into My Places as a path named Route N. The camera flies to it. The length and the travel time stand under the search line. The By car, By bike and On foot links build the route the other way, Clear removes the points.

The OSRM service on the FOSSGIS server builds the route from OpenStreetMap data, at any distance. The route from Perm to Sochi, 2664 km, arrives in 1 s. The route points go to the service server. The service updates its data every two days. The Map error link opens the OpenStreetMap page where errors in roads are reported. Requests to the server go no more often than once per second, a FOSSGIS condition. The Build routes with the service box and the address of an own OSRM server are the Routes group of the Data sources window.

Without the box or when the service did not answer, the plugin builds the route itself. It uses the roads of the vector base, that is OpenStreetMap data in OpenFreeMap tiles. A car drives on roads from motorways to tracks, keeps one-way traffic and does not go on paths. A walker goes on all roads and paths except motorways, in both directions. A bike goes where a walker goes, except trunk roads. The travel time follows the road class, from 90 km/h on a motorway to 15 km/h on a track, by bike 15 km/h, on foot 5 km/h. The data hold no traffic, speed limits or turn restrictions.

Over tiles the route points lie no more than 50 km apart in a straight line. A point goes to the nearest road of the connected network, an island of roads without an exit, for example inside the Kremlin, is skipped. Road tiles load in a strip along the straight line between the points, the line under the search shows the loading. Without a way in the strip the strip widens. A route from the centre of Perm to Motovilikha, 5 km, is built in 3 s together with loading. The ready path is an ordinary placemark, it has an elevation profile, a tour and a KML record.

Saved view

The Save view icon puts a placemark at the look-at point. The name is offered with a number - View 1, View 2. The placemark keeps the camera distance, heading and tilt. A flight to such a placemark brings the whole view back.

Placemark card

A click on a placemark on the globe, when the ruler, the new placemark and the Identify features mode are off, opens the placemark card to the right of the view - its name and description. The description is text or HTML, as in KML, links open in the system browser. A point placemark under the cursor rises and stays up while the cursor is on it, so it is clear which placemark a click will hit. If a placemark from KML has a `highlight` style in a `StyleMap`, it is drawn with that style under the cursor, for example larger. The `highlight` style is kept in My Places and written back to KML. The card buttons:

Button	What it does
Explain this	Asks the assistant what the object is and why the place is of interest. The answer appears in the card and under the Search box
Fly to	Flight to the placemark, as a tour stop
Properties...	The placemark properties window in place of the card
Close	Closes the card, Esc does the same

Explain this gives the assistant the name, kind, coordinates and description of this one placemark and the names of the globe layers turned on, for example Gravity anomalies. The names of QGIS project layers are not sent with this question. Pressing the button is consent to send them. Without it the names of placemarks do not go to the model. The button is available when the assistant is connected, see the Assistant section.

While a properties window is open on the right, a click on a placemark does not open the card and the editing in the window goes on.

Project layer object card

A click on an object of a vector project layer checked on the globe opens the object card on the right. My Places placemarks and Wikipedia articles under the same click come first. The card shows the layer name, the text of the description field and a table of the other fields. The description field is the first of the fields `description`, `descr`, `comment`, `note`, `remarks` and their Russian names, letter case does not matter. Empty fields are not shown. The object name is the display expression of the QGIS layer. Rasters give no card, their values at a point are shown by the Identify features mode. The card buttons:

Button	What it does
Explain this	Asks the assistant what this object is and why the place is of interest. The answer stands in the card and under the Search box
Fly to	Flight to the extent of the object
Select on map	Selects the object in the QGIS layer - on the map, in the attribute table and on the globe
Related records	Records by QGIS project relations follow the fields, a click opens the card of a record and brings the globe to it. Relations are set in the QGIS project properties
Close	Closes the card

Explain this gives the assistant the layer name, the name, description and fields of this one object, the clicked point and the names of the globe layers turned on. Pressing the button is consent to send them. Without it the names of project layers and the object fields go to the model only when you allow their reading, see the Assistant section.

Wikipedia nearby

The Wikipedia nearby row of the Encyclopedia category of the Add data catalogue shows Wikipedia articles with coordinates - cities, monuments, rivers, peaks. An article is a label with a blue dot. The articles are requested when the camera is below 40 km, in the language of the QGIS interface. Where there are many labels, the important ones are seen - regions and cities before landmarks - and the ones near the view point.


A click on a label opens the article card on the right - its first paragraph and a link to the article. The buttons of the card:

Button	What it does
Explain this	Asks the assistant about this place by the article text. The answer appears in the card and under the Search box
Fly to	Flies to the article point
To My Places	A placemark at the article point with the first paragraph and the link in the description
Close	Closes the card

Explain this gives the assistant the title, the first paragraph and the coordinates of the article and the names of the globe layers turned on. The assistant answers by the article text. In the Identify features mode the articles near the click appear in the Features window as the Wikipedia group with links.

Wikipedia texts are distributed under the CC BY-SA 4.0 licence. The Wikipedia credit stands in the corner of the view while articles are on the globe.

Place properties

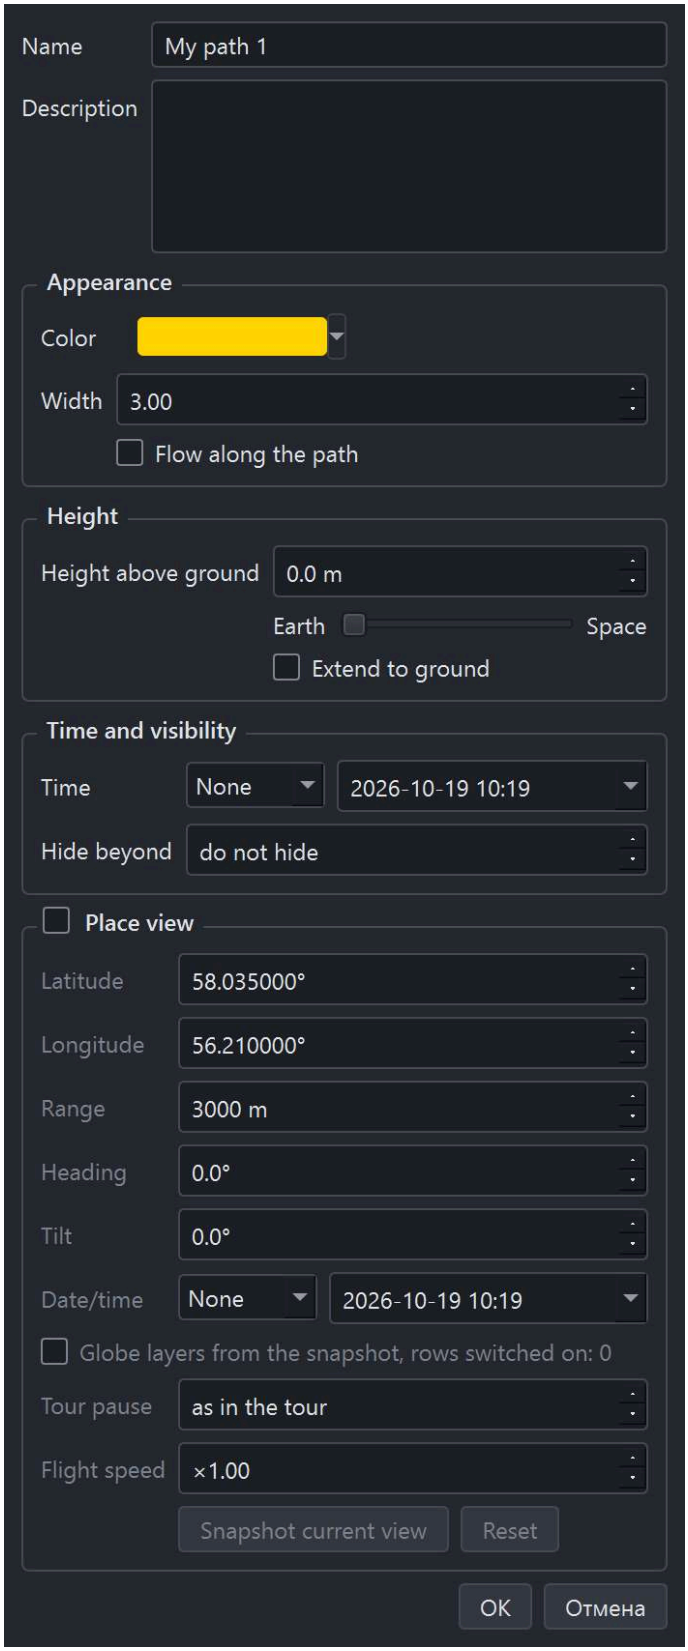

The Properties... item opens the properties window. The window does not block the globe, the view can be turned and zoomed. Each change shows on the globe at once. While the window is open, the vertices of the placemark, path or polygon show on the globe as circles and can be dragged, a circle in the middle of a segment adds a vertex. OK writes the changes to the place together with the shape, Cancel brings the previous look and shape back.

Field	What it sets
Name	Name in the list and label on the globe
Description	Text of the placemark, it goes into KML too
Icon	Point icon from the QGIS set, in KML a standard icon of the same theme
Color, Width	Color of the point icon, color and width of the line and outline
Icon size	Points only. The icon size as a share of the usual one, as scale in KML. 0 - only the label on the globe
Label colour, Label size	Points only. The colour and size of the label on the globe, as LabelStyle in KML. Size 0 - only the icon, the name stays in the list
Fill	Fill color of the polygon and of the wall
Altitude mode	What the altitude is measured from, as in KML. Clamped to ground - the placemark lies on the ground, over the sea on the water. Clamped to sea floor - on the floor. Relative to ground and Relative to sea floor - the rise above them. Absolute - the altitude above sea level, it may be below zero too
Height	The rise above the surface or the floor, in the absolute mode the altitude above sea level, in metres. The Ground - Space slider under the field sets it from the ground to 100 km. In the Clamped to ground and Clamped to sea floor modes the field is not available
Extend to ground	A wall from the object to the ground, a post for a placemark
Flow along the path	Paths only. Short dashes of the line colour run along the path from the first point to the last one, like a flow of goods
Time	Moment or interval of the placemark for the time slider
Hide beyond	The placemark is visible only while the eye is closer than this distance. 0 - always visible. In KML the field is written as Region
Place view	Look point, range, heading, tilt of the camera at the place and the view date
Object fields	A table of name and value, as ExtendedData in KML. Add field and Remove field change the set. The fields are shown in the placemark card and in the Objects window. An edit of fields from a GIS export does not go back to the source layer, it goes into KML

Extending works with a height above zero. A path becomes a wall, a polygon becomes a block.

A path with flow lies on the ground, light dashes of the line colour run evenly along it from the start to the end. The dash step is a share of the width of the visible part of the globe, so the flow looks the same from afar and up close. The order of the path points sets the direction of the flow. The flow is kept in the places file, a scene and KML, in KML it is ExtendedData, other programs do not show it.

Place view

Any place can have a view of its own. A view is the point the camera looks at, the range to it, the heading and the tilt. The look point may differ from the place. Fly to, a double click on the place and a tour stop follow the view.

Snapshot view in the place menu makes the current globe view the view of the place. The properties window has the same values in the Place view section. The Snapshot current view button takes the globe view, Reset brings back the view the place had when the window opened. Clearing the section check box removes the view, then the camera frames the whole place. The view goes into KML as a LookAt element and is read from it.

The Snapshot current view button also remembers the rows switched on in the Layers section - the Globe layers from the snapshot check box under the view time. With this check box a flight to the place and a tour switch these rows on and the others off, and each tour stop shows its own layers - for example gravity anomalies first, then the Earth cutaway with earthquake foci. The view time sets the timeline. The layers switch on at the start of the flight to the stop, so the data arrive by the time the camera does. In KML the view layers go into the ExtendedData of the placemark, other programs skip them.

Along with the rows the snapshot remembers the opacity of the rows that are on, the sector of the Earth cutaway and the ground above the subsurface model - its opacity, the cut and the camera below ground. A tour stop restores them too. Foci, fires, flow streaks and tile colourings fade in and out at the stop over half a second instead of switching at once.

The Tour pause and Flight speed fields of the same section set the pace of the stop. The pause is how many seconds the camera stays at the place, as in the tour means the pause from the tour panel. The speed is how many times faster than usual the flight to the place goes, from ×0.25 to ×4, below one is slower and smoother.


Copy and paste

Copy or Ctrl+C puts the selected places and folders into the clipboard as KML text. The text can be pasted into a text editor, edited and copied back. Paste or Ctrl+V puts the places from the clipboard into a folder. On a place it is the folder of that place, on empty space the root of My Places. Folders from the clipboard come in as folders. KML copied in Google Earth pastes the same way.

Placemark time and the time slider

The time slider is one time of the whole view. Coverages - NASA themes - take the moment, the right handle. Events - placemarks with time and earthquakes - take the range between the handles. When a theme is on and there are no events, the slider has one handle. The ‹ and › buttons move the moment by a step of the theme series, ▶ shows the days of the series one after another and waits until each day has loaded. The legends of the layers - theme, foci, cutaway, beds, insolation, slope and temperature - stand as one panel in the bottom left corner of the view.

A placemark can have a time of its own. It is a moment or an interval, the Time field of the placemark properties. In KML the time is written as TimeStamp and TimeSpan. The view of a placemark has its own time, the Date/time field of the Place view section.

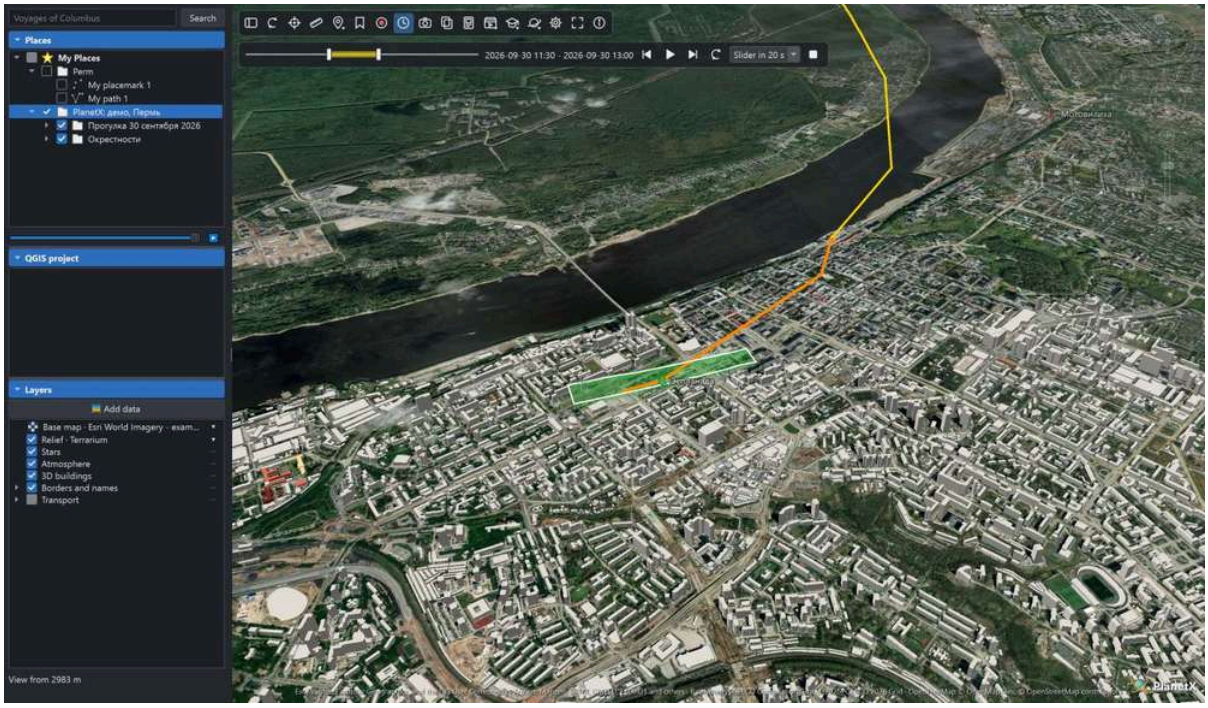

The time slider opens with the Time slider button on the icon bar. The button is available when visible placemarks have a time. The slider spans the placemark times from the earliest to the latest. A closed slider hides no placemarks, all of them show.

Part	What it does
Handles	Set the interval. Placemarks outside it are hidden, placemarks without a time always show
Bar between the handles	Dragging moves the whole interval, a click on the bar centres it on the click
⏮, ⏭	The interval of the same width moves to the start or the end of the slider
▶, ⏸	Playback and pause, the interval moves along the slider. If the interval covers the whole slider, the left handle goes to the start and the right one runs from it to the end
🔁	Playback in a loop, after the end of the slider the interval starts from the beginning
Speed	Slider in 20 s crosses the whole slider in 20 seconds. ×1 - time runs as on a clock, ×60 - a minute per second, ×3600 - an hour, ×86400 - a day
Now	The moment goes to the computer clock, time runs at ×1. The button is there when the Sun, satellites or the sky are on
■	Closes the slider

A flight to a placemark and a tour set the slider to the time of the placemark view, without it to the time of the placemark itself. A closed slider opens then. The slider is its own and does not depend on the QGIS Temporal Controller.

The Sun and Satellites layers and the sky view depend on the moment, not on data. With them the slider opens without timed placemarks too, on the computer clock, with one handle. The slider spans a day before the moment and a day after it. Playback at a clock speed does not stop at the edge of the span, the span moves after the moment. So at ×3600 the line between day and night runs over the Earth, and the satellites pass their revolutions. A closed slider returns the Sun and the satellites to the computer clock.

KML and KMZ

Open KML or KMZ... puts a KML or KMZ file, including one from Google Earth, into My Places as a new folder named after the file. Folders, styles, icons, times and placemark views are kept. `gx:Tour` becomes a recorded tour. The Region of placemarks and folders is kept too. A placemark is visible while its box on the screen is not smaller than `minLodPixels` and not larger than `maxLodPixels`. The box size is counted for a window 1000 pixels high with a 60° field of view. A placemark therefore hides at the same distance in any globe window. The camera flies to the contents of the file.

These parts of the file are carried over too:

- polygon holes (`innerBoundaryIs`) - a lake inside a field or the yard of a building stays unfilled. A click in a hole does not select the polygon.
- object fields from `ExtendedData` - `Data` and `SchemaData`, as GIS write them when exporting to KML. The fields are shown in the placemark card and in the Objects window, Explain this passes them to the assistant.
- the colour and size of the label (`LabelStyle`) and the size of the point icon. Label size 0 - a placemark without a label, icon size 0 - a label without an icon.
- the `Camera` view of placemarks, folders and tour steps. It becomes a placemark view - the look point is where the camera looks, the roll is not carried over.
- the balloon template (`BalloonStyle`) - the placemark card shows the text by the template, the places `$[name]`, `$[description]` and `$[field]` are replaced with the name, the description and the object fields.
- the icon heading (`heading` in `IconStyle`) - the icon keeps its direction from north and turns with the view.
- placemark changes during a tour (`gx:AnimatedUpdate`) - visibility, colours, icon size, line width and the point position. The size, width, colours and position change smoothly. The changes act while the tour plays, the placemarks in My Places stay as they were.
- the tour flight with a climb (`gx:flyToMode bounce`).
- a model inside a track (`gx:Track` with `Model`) - the 3D model moves along the track by the time slider, turns come from `gx:angles`, without them - along the motion. Outside the track time there is no model, with the slider closed it stands at the end of the path.

All these parts are kept in My Places and go back to KML.

Project layer to KML

The To My Places... item of the menu of a vector layer in the QGIS project section puts the layer features into My Places as a folder named after the layer. With a selection the selected features go, otherwise all of them. For a layer with more than 5000 features the window asks whether to take only the features in the visible part of the globe. Carried over:

- geometry in degrees, polygons with holes, a multipart feature - placemarks by parts with one name. Z values are not carried over.
- attributes - object fields.
- name - the QGIS layer label, without labels - the display expression of the layer.
- point label - the text, color and size of the QGIS label, simple or rule based. A label with a buffer, background or shadow becomes a PNG picture icon with the point symbol. In KMZ the picture is a file, next to KML it goes to the `<name>_files` folder. A layer gets at most 2000 different pictures, the rest are ordinary labels.

- colours - the symbol of each feature by the layer style, rules and categories included.
- point label - the colour and font size of the simple QGIS labels. A point layer without labels shows only icons on the globe.
- time - the start and end fields of the temporal properties of the layer.

Save as KML... writes the folder to KML or KMZ.

Save as KML... saves a folder or the whole My Places to KMZ or KML. The file extension chooses the format. The placemark view is written as `LookAt`. A project layer goes to KML through My Places, see Project layer to KML.

Network links

A network link is a My Places folder with the contents of a KML or KMZ document at an address, as `NetworkLink` in KML. The address is a web page (http, https) or a file on disk. The Add - Network link... item of a folder menu opens a window with the name, the address and the refresh interval. A network link from an opened KML file goes into My Places as the same kind of folder.

The document is loaded while the folder and its parents are checked. Without an interval it is loaded once per session, with an interval it is loaded again after it, but not more often than every 10 s. A file on disk is read again when another program changes it. A new document replaces the folder contents, edits inside the folder are lost then. Addresses inside the document count from the address of the document itself. Nested network links are loaded the same way, down to the third level. The Reload item of the link menu loads the document at once, Properties... change the name, the address and the interval. On a loading error the status bar shows its reason, the old contents stay. In KML a link is saved as `NetworkLink`, without contents.

An example lies in the plugin repository, folder `examples/network_link`. The `link.kml` file opens with Open KML or KMZ.... It holds two links. The first is the `planetx_demos.kml` file with demo places from the same repository on GitHub, it is loaded again once an hour. The second is the USGS feed of earthquakes of magnitude 2.5 and above for a week, it is loaded again every 5 minutes. USGS gives ready link files for its feeds with the `_link.kml` ending, for example `https://earthquake.usgs.gov/earthquakes/feed/v1.0/summary/4.5_week_depth_link.kml`.

Super-overlays

A super-overlay is a large image or map cut into tiles. The document of a tile carries its image and network links to the documents of more detailed tiles, the links and the images have their own `Region`, the links load with the `viewRefreshMode` value `onRegion`. Such a file opens with Open KML or KMZ.... The super-overlay link stands in My Places as a folder, but the places file does not keep its tiles. The globe loads only the documents and images of the tiles near the view. A tile gives way to more detailed ones when it is wider than `minLodPixels` pixels on the screen. The tiles lie on the relief under the ground overlays, a coarse tile under the arrived detailed ones is not drawn. Clearing the folder check box removes the super-overlay from the globe.

An example is the Google sample, a 1991 image of Mountain View, more than 900 tiles, the address `https://mw1.google.com/mw-earth-vectordb/kml-samples/mv-doqq.kml`. The Super-overlay, Mountain View demo of the Imagery and maps group opens it by a link. A saved file opens with Open KML or KMZ....

Image overlays

The Add submenu of a folder adds an image from a PNG, JPEG or GIF file in three ways:

- Ground overlay - the image lies on the terrain by four corners, in the middle of the view at half of its width. It lies under the borders and project layers.
- Photo - the image stands as a plane in 3D in front of the current camera. Fly to puts the eye at the camera point of the photo, and the photo covers the view.
- Screen overlay - the image stands in a corner of the view and does not move with the globe, for example a logo or a legend.

The overlay opens in a properties window. It changes the name, description, image and opacity, for a screen overlay also the corner of the view and the width. OK saves the changes, Cancel brings back the previous state.

A ground overlay is placed in one of two ways, as in KML:

- Box - north, south, east, west and rotation, fields of the properties window. While the window is open, handles stand on the globe. The centre moves the image, the handle above the north side rotates it, the corners and the middles of the sides stretch it from the opposite corner or side, with Shift from the centre. A new image is placed as a box.
- Four corners - the Convert to four corners button. Each corner is dragged with the mouse on its own, the image can become an irregular quadrilateral. It does not convert back to a box.

The image is kept in one of two ways, the Storage field:

- In the places file - a copy inside My Places, shown without the source file.
- Link to a file or address - a file path or an http(s) address. The image is read when shown, an edit of the file shows on the globe.

The Refresh field sets the interval after which a linked image is read again while it is shown. A web address is requested past the cache, so the globe shows a fresh image or map that the server updates by itself. An interval shorter than 10 s is raised to 10 s. In KML this is `refreshMode` `onInterval` and `refreshInterval` of `Icon`.

KML and KMZ with Google Earth overlays - GroundOverlay, ScreenOverlay and PhotoOverlay - open the same way. The image of a KMZ goes into the places file, the image of a plain KML stays a link to a file next to it or to a web address. Save as KML... to KMZ puts into the archive the images from the places file and the ones linked to files. To KML the images from the places file go into a folder next to it, links stay links.

Image to the QGIS project... in the menu of a ground overlay writes it to a GeoTIFF file in WGS84 by the corners of the image. The file is added to the project as a raster layer in the PlanetX - images group, with the opacity of the overlay. Ground overlays to the QGIS project... in the folder menu does the same for all ground overlays of the folder, into a chosen directory.

Clear My Places... removes all placemarks and folders after a confirmation. The removal cannot be undone, so the places needed are better saved to KML first.

3D models

Add → 3D model... places a model of a building or another object at the view point. The model is read from a Collada file (.dae) with images next to it, from glTF (.gltf, .glb) or from OBJ (.obj) with MTL files and images next to it. A KMZ file with a Google Earth model opens as a places file, and the model stands at its place.

An OBJ file has no units and no up axis. The plugin takes the unit as a metre and the Y axis as up, as Blender and glTF write it. A model with the Z axis up lies on its side, a tilt of 90° in the properties window stands it up.

A model is a row of My Places. The checkbox hides it, Fly to puts the camera to the side and above, and the model goes into tours and into saved KML and KMZ.

The properties window of a model sets its place, as Model in KML:

- latitude and longitude of the model point, the origin of the model file coordinates
- altitude mode - on terrain, above terrain or above sea level
- heading, a clockwise turn as seen from above, at zero the Y axis of the model points north
- tilt and roll, turns around the X and Y axes of the model
- scale, where one means the sizes from the model file
- opacity.

Below the fields stand the count of triangles, materials and images and the size of the model in metres.

While the properties window is open, a frame stands on the ground around the model, the footprint of its box, like the frame of a ground image. The frame handles put the model in place with the mouse:

- the cross in the middle moves the model
- the diamond above the north side of the frame turns its heading
- a corner scales the model along all axes, the opposite corner stays in place, with Shift the centre stays
- the middle of a side stretches the model along one axis.

The window fields follow the handles. The frame is built by the heading, the tilt and roll of the model are not taken into account.

A new model is kept as a link to the source file, like a Google Earth model. The model is read from it and the images next to it, an edit of the file in SketchUp or Blender shows on the globe. The Refresh field sets how often the file is checked while the model is visible. The Storage field of the properties window puts a copy of all model files into the places file, then the source file is not needed. Browse… chooses another model file, the place and the scale stay.


Save as KML… to KMZ puts the model files into the archive, for linked models too. To KML a model in the places file goes into a folder next to it, a linked model keeps the path to its file. A scene carries the files of all models of its folder. Model images larger than 2048 pixels are reduced. A glTF model with Draco or meshopt compressed meshes is not read, such a file is saved again without compression, for example in Blender.

A glTF or Collada model with node animation moves on the globe. The position, rotation and scale keys of its parts play in a loop while the model is visible. For glTF the first animation of the file is played. Skinned meshes and morphing are not played, such a model stands in its bind pose. The model properties window shows the animation length and the number of moving parts.

The module does not read IFC building models. Such a model is converted to glTF with the free IfcConvert program of the IfcOpenShell set, the command is `IfcConvert model.ifc model.glb`. Blender with the Bonsai add-on and FreeCAD with the BIM workbench do the same conversion. The .glb file is added with Add → 3D model… and set in place with the model frame handles.

Ruler

The Ruler icon opens a window with the tabs Line, Path, Polygon, Circle, 3D path and 3D polygon. Points are put with clicks on the globe, a rubber band follows the cursor.

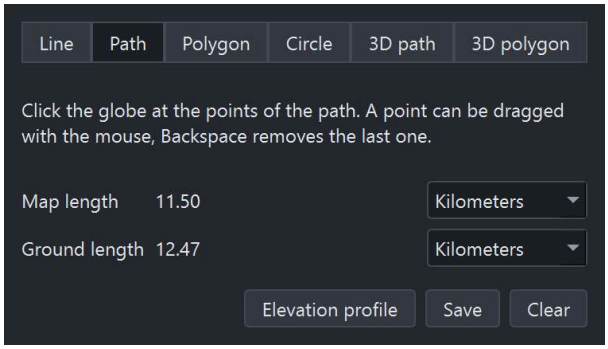

Tab	Values
Line	Map length, ground length, heading. The third click starts a new line
Path	Map length, ground length
Polygon	Perimeter, area
Circle	Radius, perimeter, area. The first click is the center, the second sets the radius
3D path	Length by straight segments in space
3D polygon	Perimeter, area in the plane of the polygon, tilt of the plane

Map length, perimeter and area are computed on the WGS84 ellipsoid. Ground length runs along the surface with its rises and falls. Heading is the azimuth of the start of the line clockwise from north. Each value has its own units - metres, kilometres, miles, nautical miles, and for the area square metres, hectares, square kilometres, square miles.

Heights for the ground length come from Mapzen Terrain Tiles. Missing height tiles along the line are loaded, even when terrain is off. While they load, the ground length is preceded by «≈».

A ruler point can be grabbed with the mouse and dragged, Backspace removes the last point. Each segment on the globe is labelled with its length. For a polygon and a 3D polygon, the hint Close shape appears over the first point. A click on it closes the shape and finishes the drawing, after that the points are dragged with the mouse.

The Save button puts the shape into My Places together with the measurement. The name is offered with a number, for example Line 1. The measurement shows in the row tooltip.

The 3D path and 3D polygon tabs put a point on the roof or wall of a 3D building when the ray from the eye meets it before the terrain. They keep the height of the point. Segments run straight between the points and do not follow the terrain. The area of a 3D polygon is measured in its plane, so for a roof slope or a wall it is the real one. Tilt is the angle of the plane to the horizon, 0 is a flat roof, 90 a wall. A saved 3D shape goes to KML with altitudeMode absolute.

The Ruler and New placemark windows are open one at a time. Opening one closes the other.

Elevation profile

The Elevation profile button of the ruler opens a chart of height along the line. The Elevation profile item in the menu of a path in My Places does the same.



Under the chart are the map and ground length, the lowest and highest height, ascent and descent, the mean and maximum slope. The cursor over the chart shows the distance, height and slope at that place, and a mark with the height shows the point on the globe. The profile of the ruler follows its points.

Heights are taken as for the ground length. The slope is measured over a stretch not shorter than three pixels of height data, so roughness of the data does not pass for a cliff. On steep mountains the maximum slope may exceed 100 %, that is 45°.

Site and analysis results

Slope and aspect, viewshed, insolation, land change, classification, flooding, water flow and sea level are collected in the Site analysis submenu of the menu on the globe. The windows of these tools, except the viewshed and the sea level, compute over a site, as Google Earth does.

The white outline on the globe is the site. When the window opens, it is a square centred on the point under the cursor, the Site field sets its side, and the Square button returns the square. The site vertices are dragged with the mouse, the circle in the middle of a side adds a new vertex. The Draw button erases the site, and the vertices are placed by clicks on the globe. At the first vertex the hint Close the shape appears, and a click on it closes the site. The calculation runs over the frame of the site, there are no results outside the polygon. Each window has its own largest site size, the field tooltip names it. The viewshed is computed in a circle around the observer.

The From layer button makes a polygon of a project layer the site. The menu names the polygon layers. The chosen layer gives its selected features, a layer with one feature gives that feature. Without a selection, a click on the globe takes the polygon under the cursor. The site is one outline. The largest part of a multipart feature is taken, holes are not counted, an outline of more than 500 vertices is simplified. An outline of up to 100 vertices is dragged with the mouse as usual, a more complex outline has no handles. The result line names what was left out. If the window point falls outside the site, it is moved inside.

All these windows share the site. A site set in one window is taken by the windows open at that moment and by the windows opened later for a point inside it. So one site is computed by different tools. The result line of the window says that the site is shared. A point outside the site and the Square and Draw buttons start a new site. If the site is larger than the limit of a window, the window asks to reduce it.

The windows of slope and aspect, viewshed, insolation, land change, classification and flooding have the same buttons. Build shows the result on the globe, it can be built again any number of times. OK writes the result to the QGIS project and closes the window. Each calculation is a subgroup " " in the PlanetX - site

analysis group, holding the Site layer with the site outline and all layers of this calculation. Layers added by the window buttons before OK, such as peaks and pits or change spots, go to the same subgroup. The Water flow window has no OK button, its layers go to a subgroup at once, and a new site or a new opening of the window starts a new subgroup. Removing a subgroup removes the whole calculation.

The files go to the project folder, or to the PlanetX folder of the QGIS profile if the project is not saved, the name is the tool and the time. After that the result is an ordinary project layer. The globe shows it as a project layer, the check box and opacity are in QGIS. Cancel and the cross of the window remove the result from the globe, nothing is written to the project.

The slope and aspect, insolation and flooding windows show a summary of the site values in the result line - the mean, the standard deviation and the 10, 25, 50, 75 and 90 % quantiles. The same summary is in the raster description in the layer metadata, the land change raster has it too. Cells outside the site do not enter it, flooding counts only the flooded cells.

While a long calculation runs - loading heights or AlphaEarth vectors, computing a viewshed or insolation - the loading icon to the right of the icon bar turns, and its tooltip names the calculation. A click on the icon opens the Stop menu. The calculation is interrupted, the earlier result stays.

Which image the analysis windows need

The site analysis windows take different data. Some work by the terrain and ask for nothing but the site. Others work with an image, and the result depends on the image. The table lists what each window needs and where to get it.

Window	What is needed	Where to get it	Hint
Slope and aspect, viewshed, insolation, shadows, flooding, water flow, earthwork	Heights	Open terrain comes by itself. Own terrain is a project raster with the Globe terrain item	Own terrain is more accurate than the open 30 m one
Land change	AlphaEarth embeddings 2017-2025	Loaded by themselves	Network is needed
Recognition	A summer image, if possible also a snow image	The window finds and loads Sentinel-2 images of the site itself on «Build»	Nothing to search for
Classification, similar areas	Any image or AlphaEarth	Globe basemap, project raster, AlphaEarth	For accurate work - one scene of the Satellite images window, the basemap is made of different surveys
Tracing	An image with color	Globe basemap or project raster	The Esri or Google basemap is the most detailed
Object extraction	An image with near infrared and red or SWIR	The Find image button of the window, the Satellite images window - a band combination or All scene bands of Sentinel-2 and Landsat	Summer for conifers and broadleaf, the second image - March or April with snow
Minerals by spectrum	An image with six bands or more	The window finds ASTER images of 2000-2006 with SWIR bands itself, the Load button	By three bands different minerals give one spectrum
EMIT minerals	NASA EMIT mineral maps	The window finds scenes itself, files by a NASA Earthdata key	Arid regions, since 2022

Window	What is needed	Where to get it	Hint
Series by dates, trend map	Scenes of one place for many dates	The Satellite images window	A year or more for the trend

Band combinations of the Satellite images window for the eye:

- Natural colour (B4 B3 B2) - as a photo.
- False colour, near infrared (B8 B4 B3) - vegetation is red, the brighter the denser.
- Agriculture (B11 B8 B2) - conifers are dark green, broadleaf and grass light green, bare soil pink. The Find image button of the Object extraction window takes it.
- All scene bands - the scene bands in one file, for rules, spectra and classification.

Single-band indices - NDVI, NDMI and others - are handy for the eye and for the series by dates, but they do not suit the windows that need several bands.

Slope and aspect of a site

The Slope and aspect… item of the Site analysis submenu opens the Slope and aspect window for the point under the cursor. The site is up to 100 km, the grid step is about one six-hundredth of its largest size. The Build button loads the heights of the site and colours it on the globe. The heights are the same as those of the globe terrain, with the 30 m land refinement and own terrain from a project raster if they are on.

Slope and aspect are computed with a 3 × 3 kernel (Horn, as in gdaldem), the computation is ported from the Isoliner plugin. Aspect is the direction the slope faces, flat ground under 0.5° has none. The Show list selects the colouring of the site, slope or aspect, the colours and the scale are those of the Slope and Aspect rows of the Layers section. The site takes the same globe layer, so the rows switch off meanwhile, and a row switched on removes the site. Under the fields is a summary, the lowest, the highest and the median slope, the areas by slope classes and the three directions most slopes face.

OK writes slope and aspect rasters in degrees to the calculation subgroup, the one the site showed is on the globe. The Peaks and pits button finds the peaks and closed depressions of the site and writes them as a GeoPackage point layer to the same subgroup, each point keeps its kind, elevation and rise. A peak is higher than everything around it within the Peak radius field, a pit is lower, and the rise to the lowest or highest point around is at least the Rise from field.

Viewshed from a point

The Viewshed… item of the Site analysis submenu of the globe menu opens the Viewshed from a point window for the point under the cursor. The window sets the observer height above the terrain, the target height and the circle radius. The Build button loads the heights under the circle and colours it. Visible places are green, places hidden by the terrain are red. OK writes the viewshed as a raster to the calculation subgroup, its site outline is the circle.

Rays leave the point with an equal azimuth step. The step along a ray is one five-hundredth of the radius, 20 m for a radius of 10 km. A place is visible if the ray from the eye to it does not touch the terrain on the way. The computation takes the curvature of the body into account, and on the Earth the refraction with the coefficient 0.13. Forest is not taken into account. The Include buildings box raises the terrain by the height of the OpenFreeMap 3D buildings and of own buildings - extruded My Places polygons, extruded project layers and placed 3D models. Buildings block the view and cast shadows, the height of some OpenFreeMap buildings is nominal, about 5 m. A building narrower than the computation step may be missed, so streets need a small radius. The result line gives the number of included buildings and own ones among them. A

circle wider than 300 building tiles is computed without OpenFreeMap buildings. The window shows the visible share of the circle area. If the heights are not loaded within 30 s, the computation uses less detailed ones, and the window says so. The viewshed is computed on the Earth, Mars and the Moon.

Insolation

The Insolation… item of the Site analysis submenu of the globe menu opens the Insolation window for the point under the cursor. The window sets the first and the last day of the period and a site up to 40 km. The Build button loads the heights and colours the site by the mean number of hours of direct sunlight per day. Blue means little light, red means much light. The scale in the bottom left corner of the view runs from zero to the largest value. OK writes the hours as a raster to the calculation subgroup with the same colours.

The position of the Sun is computed every 10 minutes of the UTC day. A place is lit if the Sun is above the mountain horizon at its azimuth and falls on the front side of the slope. The horizon is taken in 32 directions at a distance of at least half the site and at least 5 km. A period longer than 15 days is computed over 15 evenly spaced days. Clouds, refraction and forest are not taken into account. Buildings are included by the same Include buildings box as in the viewshed, they are taken 1 km beyond the site too. The calculation runs in a circle covering the site, the height grid has 800 nodes per side, the step is about 25 m for a 7 km square. The computation runs in parts, and the globe responds to the mouse meanwhile. The line under the fields shows the share done. Insolation is computed only for the Earth.

Shadows

The Shadows… item of the Site analysis submenu of the globe menu opens the Shadows window for the point under the cursor. The globe shows where the site is in shade and where in sunlight at the chosen moment. Shade is a dark bluish fill, sunlight is a light warm haze. The Moment line shows the local time of the computer and UTC.

The moment is the right handle of the time slider, without the slider - the computer clock. The Build button loads the heights and computes the horizon of the site once, then opens the time slider. After that the shadows follow the slider - the handle is moved with the mouse or by playback ▶, a new map appears 0.3 s after the handle stops, without a new download. The line under the fields shows the height of the Sun and the share of the site in sunlight. With the Sun below the horizon, everything is in shade.

The horizon and the height grid are the same as for insolation, the Include buildings box adds OpenFreeMap buildings, your own 3D models and extruded polygons. OK writes the map at the current moment as a raster to the calculation subgroup - 1 sunlight, 0 shade, no values outside the site. Shadows and insolation share one globe layer, a map built in one window removes the map of the other. Shadows are computed only for the Earth.

Land change

The Land change… item of the Site analysis submenu of the globe menu opens the Land change window for the point under the cursor and turns on the Land change row of the Layers section. The globe shows where the land changed between two years. Black is no change, yellow is construction, logging, a new quarry or flooding. The scale of the degree of change from 0 to 1 is in the lower left corner of the view.

The data is the AlphaEarth Foundations Satellite Embedding dataset, CC BY 4.0. Every 10 m land cell is described for each year from 2017 to 2025 by a vector of 64 numbers, a summary of Sentinel-2 and Landsat images and radar over the year. The degree of change is the dissimilarity of the two years' vectors, one minus the cosine of the angle between them. Unchanged land is about 0.05, strong change 0.5 and higher. The computation reads the dataset files over the network, no key or account is needed.

The window sets the years to compare and the range of the degree of change, cells outside the range are transparent. The globe shows an overview of the view with a pixel of 160 m or coarser by itself, its tiles are visible down to about 20 km per tile. More detail comes from the detail area of up to 20 km, the Area pixel list sets the pixel of 10, 20, 40 or 80 m. The dataset files store blocks of 1024 × 1024 pixels, one block per year is 40-50 MB at any pixel size, so a download estimate is shown under the fields. At 10 m a block covers 10 km, at 80 m 82 km. The Detail button shows detailed values inside the site, they load when the view comes close to it.

OK writes the degree of change of the site as a raster in UTM to the calculation subgroup, there are no values outside the polygon, Cancel removes the site. The overview stays as a row of the Layers section in both cases. The Change spots button finds up to ten spots of the strongest change in the site and writes them as a GeoPackage point layer to the same subgroup. What exactly changed is then seen with the Esri Wayback imagery archive and the swipe.

Land change, the geophysics value maps, the geological map, lithology, water and soils are one layer of the globe with one map on it. A map turned on removes the previous one, the cross of the scale turns the row off. Land change is computed only for the Earth.

Recognition

The «Recognition…» item of the «Site analysis» submenu opens the «Recognition» window for the point under the cursor. It is the simplest way to site classes. You set the site, add classes and place their points, and the window finds the images itself.

1. Site - a square at the point, «Draw» or «From layer», up to 20 km.
2. Classes - a name and a colour, the circle picks a class.
3. Samples - points or areas. With «Points» a click on the globe places a point of the class, a click on a point removes it, three points per class are needed. With «Areas» a click starts an outline of the class, a click on the first vertex closes it, a click inside the outline removes it. One outline per class is enough, the class samples are the cells inside the outline. Points and outlines of one class work together.
4. «Build» first checks the site and the samples, then finds the images and only after that computes the classes. At least two classes are needed.

The «Images» table shows what the window takes - a summer image and a March - April image with snow. Each is the clearest Sentinel-2 image over the site in three years, the «Agriculture» combination (B11 B8 B2) cut to the site. A project image with band labels that covers the site is taken without loading, so the second «Build» starts at once. On snow conifers are dark, bare broadleaf forest and fields are light, so the snow image helps to tell conifers from broadleaf. If there is no clear snow image, the classes are computed from the summer one. A click on a table row gives other dates, a project image or «No image».

Finding and loading two images of a 3 km site takes about three minutes, most of it is the cloud cover over the site of catalogue scenes.

OK writes the class raster, the control points and the sample outlines to the computation subgroup, «Cancel» removes the classes from the globe. Fine settings - the pixel, splitting into objects, the AlphaEarth source - are in the «Classification» window.

Classification

The Classification… item of the Site analysis submenu of the globe menu opens the Classification window for the point under the cursor. Classification divides the cells of the area into classes by the same AlphaEarth vectors as land change or by the bands of a project raster.

A site by AlphaEarth embeddings is not larger than 10 km, a site by a project raster is up to 1000 km. Classes are computed only inside the site.

A class has a color and a name, the Add class button adds a new one, ✕ removes a class with its points. The round button of a class selects it, and a click on the globe places a point of this class. A point is a sample of the class, for example forest, field, buildings or water. At least two classes with three points each are needed, there may be more points. A click on a point of any class removes it, the hint Remove point appears at the cursor. The Classes from tracing button takes the classes with their names and colors from the Tracing window after Build, and the classes without points are replaced. The points of the new classes are placed by clicks on the globe.

The Build button assigns each cell of the area to the class of the five nearest control points by the similarity of the vectors of the selected year. The classes appear on the globe in their colors, the line under the fields gives the share of each class. Points are placed on the globe imagery, and the year of the imagery may differ from the year in the window. The 10, 20, 40 or 80 m pixel and the download estimate work as for the land change detail area. The Auto pixel takes the pixel with the smallest download at which the area has 14 to 640 thousand cells, and the line under the field names it. A file block for a year weighs 40-50 MB at any pixel, and while it loads, the status line counts the blocks.

The Source list selects where the features of a cell come from - AlphaEarth embeddings, the globe basemap or a QGIS project raster read from a file. For a raster, each band is a feature, the Year field is unavailable and no network is needed. The raster is resampled from the layer coordinate system to the area grid in UTM. Bands may be in different units, for example heights in meters and reflectance in fractions of one. Therefore each band is brought to a mean of 0 and a spread of 1 over the cells of the area, and the similarity of cells is the Euclidean distance. A band without spread over the area is ignored. A cell without data in at least one band gets no class, an alpha band is not a feature. A point on such a cell does not vote, and the line under the fields gives the number of such points. The votes of a class are divided by the number of its points, so classes may have different numbers of points.

The Auto pixel for a raster is the pixel of the raster itself if the area has no more than 640 thousand cells, otherwise it is larger. A 1, 2, 5, 10, 20, 40 or 80 m pixel sets the area grid as it is, pixels finer than 10 m exist only for a raster and the basemap. The line under the field gives the grid step and the number of cells, for Auto - the step it will take. The grid has no more than 16 million cells, otherwise the line under the fields asks for a larger pixel or Auto. If the raster covers the area partly, the line under the fields gives the covered share. An area outside the raster extent gives no classes, and the line reports it.

The Globe basemap source takes the current basemap of the Base map row, so the image need not be added to the project. The tiles under the area are assembled into a picture in memory, no image file is written, and the features are red, green and blue. The tile level follows the pixel, and a tile without imagery is replaced by its enlarged ancestor. The Auto pixel is the pixel of the most detailed basemap level if the area has no more than 640 thousand cells, otherwise it is larger. On a 3 km area it is about 3.75 m. The pattern of crowns and clear-cut rows shows at a 1-2 m pixel, and on an area up to 2 km such a pixel fits into the 4 million cells of division into objects. The mosaic has no more than 1024 tiles, otherwise the line under the fields asks for a larger pixel or Auto. Before the first calculation with each basemap a window reminds that its terms may not allow such use, and the decision and responsibility are the user's. The source credit is written to the rights of the result layer.

Basemap imagery is assembled from different surveys. Color, season and lighting change at their borders, so classes may follow a survey border rather than the terrain. The basemap features are only the visible color. For precise work a project raster is suitable - one scene from the Satellite images window.

The Divide into objects check box works both with a project raster, usually an image, and with AlphaEarth embeddings. The site is first divided into objects - connected pieces similar in color and texture, for example a field, a clear-cut, a block or a lake surface. The division merges neighboring regions starting from single cells, the choice of a pair takes into account heterogeneity and smoothness of the border. The Object scale field sets the allowed heterogeneity - the larger it is, the larger the objects. The scale refers to the site, so another pixel hardly changes the size of the objects. If the whole site comes out as one object, the line under the fields asks to reduce the scale. Texture share is the share of the spread of brightness around a cell among the features, it separates a forest from a meadow of the same color. An object smaller than Smallest object merges with its most similar neighbor. A control point takes the features of its object, and a whole object gets a class by the means and spreads of the bands inside it. For a raster and the basemap the pattern of the object is added - the mean brightness step between neighbor cells, its grain and its direction. Clear-cut rows and plough strips give steps of one direction, crowns and grass give steps of all directions, so a clear-cut differs from a meadow of the same color and spread. The pattern is taken only from the cells of the object itself. On the globe dark lines show the object borders, the line under the fields gives their number. OK writes, instead of a raster, a polygon layer Objects with the fields class, name, area_ha, mean_N and sd_N, AlphaEarth has no band fields. Neighboring objects of one class stay separate, the Merge neighboring objects of one class check box joins them into one polygon. Changing the division settings computes the objects again, changing the points computes only the classes. The grid is not larger than 4 million cells.

The Opacity slider changes the transparency of the classes. OK writes the classes as a raster in UTM to the calculation subgroup, with the colors, the names of the classes and the same opacity, and next to it the training points as a GeoPackage layer with the class number and name. The name of the class layer and of the Objects layer carries the calculation settings - the number of classes and points, the division into objects and the pixel. The layer description holds the source, the settings and the classes with their share of the site. The points and classes of the window stay until the window opens again. Classes and the viewshed from a point are one layer of the globe, a new viewshed removes the classes. The land change map stays visible together with the classes.

Similar areas

The Similar areas… item of the Site analysis submenu of the globe menu opens the search by a sample for the point under the cursor. A sample shows what to look for, such as a clearing, a quarry, a field or a bog, and the plugin finds objects of the site similar to it by color and texture.

The source, the site, the pixel and the division into objects are the same as in the Classification window. The source is AlphaEarth embeddings, the globe basemap or a project raster, and the site is shared with the other analysis windows.

The sample is outlined with clicks on the globe while the window is open. A click on the first vertex closes the outline, and the Close shape hint appears at it. There may be several outlines, and an object is compared with the nearest sample. The Remove samples button removes all outlines. The outline need not be exact. A sample consists of the objects that take at least a quarter of the outline, not of separate cells, so the edge of a neighboring forest inside an outline around a field does not affect the search. An outline across the border of two objects gives two samples.

The Build button divides the site into objects and compares each of them with the samples by the mean values of the bands, the spread inside the object and, for a raster and the basemap, the pattern of the object, as in classification. Texture share sets the weight of the spread and the pattern next to color. The found objects appear on the globe in orange, and the line under the fields gives their number, area and share of the site.

The Similarity slider changes the selection at once, without a new calculation. An object matching a sample has a similarity of 100 %, two random objects of a site have about 14 %. Similarity is relative to the site. The more diverse the site, the closer objects of one kind appear to each other. The Merge neighboring found objects check box joins neighbors into one area.

OK writes the found objects as a polygon layer Similar areas with the fields area_ha and similar (similarity in percent) and the outlines as a layer Samples to the calculation subgroup. The search compares an image of one day, so on an ordinary image the result depends on the season and the light. AlphaEarth embeddings combine a year of images and are less sensitive to this. This globe layer is shared with classification and the viewshed from a point, a new calculation of any of them removes the previous one.

Tracing

The Tracing... item of the Site analysis submenu of the globe menu opens the window of image vectorization for the point under the cursor. The image of the site is split into colors, and the areas of one color are outlined with smooth polygons, as Trace Bitmap of Inkscape does with the Potrace method.

The source is the globe basemap or a project raster, the site is shared with the other analysis windows, and the pixel is the same as in the Classification window. For a raster with many bands the colors are found by all bands, and the first three give the layer colors.

The fields of the window:

- Colors - how many colors the image is split into, from 2 to 32.
- Image smoothing - passes of 3 × 3 smoothing before the split, it removes noise and small details.
- Smallest area, cells - a smaller area merges with the neighbor along the longest shared border.
- Corner rounding - 0 gives a broken line with corners, the larger the value, the more corners become smooth arcs.

The Build button shows the colors of the site cells on the globe, and the line under the fields gives the number of colors and areas. The Classes table under the fields lists the colors by their share of the site, Color 1 takes the most. The name of a color can be rewritten, for example Conifers or Bare soil, and it goes to the legend on the globe and to the layer. The list to the right of the name merges the color into another one, and the areas of both colors become one class with the name and color of the one it is merged into. A new Build sets the colors and names anew.

The Names from the assistant button above the table sends the AI assistant the class table - the mean band values with their roles, the share of the site, the number and mean size of the areas, the site point and the image month, and in the Object extraction window also the names by the rules. The image, layer and file names do not go to the model, and pressing the button is consent to send the table. The assistant answers with a name for each color, the names go into the table, and colors with the same name merge. The names can be corrected. The assistant is connected in the Assistant settings window, see the Assistant section.

OK writes a polygon layer with the fields cls (class number), name (class name), color and area_ha to the calculation subgroup, and the areas are drawn in their colors. The layer name carries the source and the calculation settings, for example "Tracing image (8 colors, smoothing 1, areas from 25 cells, rounding 1.00, pixel 10 m)". The layer description (QGIS layer properties, Metadata) holds the source, the settings and the classes with their share of the site. Neighboring areas share their border, so there are no gaps or overlaps between the polygons. This globe layer is shared with classification, similar areas and the viewshed from a point, a new calculation of any of them removes the previous one.

Object extraction

The Object extraction... item of the Site analysis submenu of the globe menu opens the window of typical tasks for the point under the cursor. The window is tracing with rules. The image of the site is split into colors, and the colors get names by reflectance - coniferous forest, broadleaf forest and grass, bare soil, water, snow. Colors of one kind merge into one class, and bare soil among conifers comes out as clear-cuts.

Step by step:

1. Right-click a place on the globe, the Site analysis submenu - Object extraction....
2. Choose the task - Forests and clear-cuts, Fields, Water or Overgrown fields.
3. Set the site - a square with the Site field, your own outline with the Draw button or a layer polygon with the From layer button.
4. If the Source list has no image, press Find image. The window finds summer Sentinel-2 images of the site for three years without cloud over the site. A double click on an image loads it, and the image becomes the source.
5. Press Build. The classes go to the globe, and the line under the fields gives the area of clear-cuts and the length of lines.
6. Correct the names in the Classes table and press OK - the polygon layer goes to the QGIS project.

The Source list shows only suitable images - those whose near infrared and red or SWIR 1.6 μm the window recognized by the band labels. These are images of the Satellite images window of Sentinel-2 or Landsat - a band combination, for example Agriculture (B11 B8 B2), or All scene bands. For files of earlier module versions the bands are recognized by the file name. The globe basemap, a single-band index such as NDVI and a raster without band labels are not in the list - the rules have nothing to rely on in them. The line under the list says whether the image is suitable, which bands the window recognized and the day of the image. If the image or the second image covers only part of the site, the line gives the share of the site under it. Below 90 % Build does not run - the classes would cover only part of the site. The Find image button loads the Agriculture combination of the site into the Sentinel-2 group of the project, as the Satellite images window does.

The tasks:

- Forests and clear-cuts - coniferous forest, broadleaf forest and grass, clear-cuts and burns, bare soil, water.
- Fields - vegetation, bare soil and arable land, clear-cuts, water. The smallest area is larger, and fields stay separate polygons.
- Water - water and land.
- Overgrown fields - arable land, fields abandoned 1-2 years, fallow land and meadows, fields overgrowing with trees, forest. A series of spring and autumn images is needed, see the Overgrown fields section below.

Second image. In summer conifers and broadleaf may have the same near infrared brightness, and one image does not separate them. A winter - summer pair does it most simply. On snow coniferous forest stays dark, while bare broadleaf forest and fields under snow are light. The Find button at the Second image list searches images of the site in March and April, while the snow lies and the sun is already high enough, and in October, when broadleaf forest is already bare and there is no snow yet. A double click loads the image as the second one. In December and January at the latitude of the Urals the sun is too low for the images. The Second image list holds only images with near infrared. The bands of the second image go to the same site grid and into the split into colors together with the first ones.

If the second image has snow, conifers are the vegetation that stayed dark in the visible bands on snow (not brighter than 0.25) and is not light in summer near infrared. The rest of the vegetation is broadleaf and grass. Both signs are needed. Bare broadleaf forest on snow may be dark from trunks and shadows, and its bright summer infrared tells it apart. A meadow or bog dark in summer looks like conifers, and the snow tells it apart. At the site at 59.99° N, 57.43° E by the images of 21 July 2025 and 17 April 2026 the snow alone would give 90 % conifers, both signs give 47 %. The result line says "Conifers are separated from broadleaf by the snow of the second image". Without snow, for example on an autumn image, conifers are the vegetation whose near infrared hardly changes between the dates (the smaller value to the larger one not below 0.75). Broadleaf and grass lose infrared reflectance in another season, conifers do not. Near infrared cannot be judged on snow - snow has it high. The second image is named in the layer settings.

The Linear objects check box adds center lines - roads and cuttings (narrow strips of soil), rivers and canals (water), shelterbelts and cuttings (vegetation). On the globe the lines show above the classes, and OK writes the Lines layer with the fields kind, name and length_m next to the polygon layer. The polygons do not change, so a narrow road in a forest stays a soil polygon as well and may come out a clear-cut.

The More settings check box shows the fine settings - pixel, number of colors, image smoothing, smallest area, corner rounding and line width. The task sets them itself, and without the check box they are hidden. Line width means that an object narrower than this is a line, 40 m by default. The width must be at least two grid pixels, otherwise the line breaks. A line is made this way. A morphological opening with a square of this width removes the narrow part of the mask, and the rest is thinned to a one-cell line. Spurs shorter than three widths are dropped, and so is a connected piece of line shorter than 200 m.

The rules:

- water is dark in near infrared and SWIR.
- vegetation has the index (NIR - red) / (NIR + red) above 0.35, without a red band (NIR - SWIR) / (NIR + SWIR) above 0.05.
- conifers are the part of the image vegetation dark in near infrared, if the infrared range of vegetation is over 0.05, otherwise vegetation is one class.
- snow and ice are bright in the visible and dark in SWIR.
- the rest is bare soil.
- clear-cuts and burns are connected pieces of bare soil with at least a quarter of deep coniferous forest in the three-cell band around them, deep meaning that at least half of the forest cells are inner. Mixed pixels along the edge of a clear-cut or a field look now like broadleaf, now like conifers, and the band and the depth guard against them. Light vegetation may be a crop as well, so arable land next to it is not taken for a clear-cut.

If the result is not the expected one:

- No clear-cuts, though clear-cuts are seen in the image. Old clear-cuts grow over with grass and young broadleaf forest and come out as the Broadleaf forest and grass class, light patches among conifers. A clear-cut is only bare soil. Look for fresh clear-cuts on an image of the same summer or the spring after the cutting.
- Conifers and broadleaf are mixed. Take a second image of March or April with snow or a summer image instead of a spring one.
- Classes break up or stick together. In More settings increase or decrease the number of colors and the smallest area.
- Clouds and shadows come out as their own classes. Take another image, Find image shows only images without cloud over the site.

- Built-up areas come out as soil or clear-cuts. Roofs, asphalt and yards reflect like bare soil, and yards with trees next to a forest look like clear-cuts. The task has no built-up class. Outline a site without settlements with Draw or correct the class in the Classes table.

The class names and merges can be corrected in the Classes table, and clear-cuts and lines are separate classes after the classes of the table. The Names from the assistant button asks the AI assistant for names, see the Tracing section. OK writes a layer as in tracing, and the task is the first of the settings in the layer name.

The Refine with points button above the table opens the Classification window with the same image, site and classes. Here the classes are given by rules, there they are refined with your own control points - for example, when the rules mixed conifers and broadleaf or a class the task does not have is needed. The Classification… and Object extraction… items stand next to each other in the submenu.

Overgrown fields

The Overgrown fields task finds fields that are no longer cultivated. Arable land in spring before the shoots and in autumn after the harvest and autumn ploughing is bare soil. Fallow land has old grass in spring and autumn, and after several years shrubs and young forest. So the window looks through a series of spring and autumn images for 4 years and finds for every field of the summer image the year when it last had bare soil.

Step by step:

1. Choose the Overgrown fields task and a summer image in the Source list. The summer image splits the site into fields, forest and water.
2. Press Pick images in the Spring and autumn row. The window searches Sentinel-2 images of the site for 4 years and puts into every empty cell of the table the image with the least cloud over the site. At equal cloud the image closer to the end of May in spring and to the beginning of October in autumn is taken. At the end of May arable land is still bare, while fallow land is already green. At the beginning of October the harvest is in and there is no snow yet. An image of 1 September finds fields under unharvested grain. The images load one by one as the Shortwave infrared (B12 B8A B4) combination into the Sentinel-2 group of the project. Images already in the project are not loaded again.
3. The table has rows by year and the Spring and Autumn columns, and a cell holds the day of the image. A click on a cell opens a menu with other days of the same season and the No image item. The line above the table counts the images, for example "8 of 8 images".
4. Press Build, then OK.

The classes:

- Arable land, cultivated - bare soil in the last year of the series.
- Abandoned 1-2 years - the last bare soil one or two years ago.
- Fallow land or meadow - no bare soil for three years and more, trees on less than a quarter of the field.
- Overgrowing with trees - trees on a quarter of the field and more, but less than 70 %.
- Forest - trees on 70 % of the area and more.
- bare soil in summer and on nearly all season images is built-up land, roads or a quarry, not a field.

The rules:

- bare soil has (NIR - red) / (NIR + red) below 0.3 on a spring or autumn image. On the images near Shadeyka (57.43° N, 56.80° E) of 2023-2026 arable land has 0.10-0.25, and the dry old grass of fallow land 0.35-0.5. Water and snow do not count.

- a field was cultivated in a year if bare cells cover at least a quarter of its area on one image of that year. An image counts for a field if half of its cells have data.
- trees have the median SWIR 2.2 μm of the spring and autumn images below 0.09. Near Shadeyka forest has 0.03-0.08, meadows and fallow land 0.10-0.20, arable land 0.15-0.30. If the season images have no SWIR, the trees are taken from the summer image.

The polygon layer gets the fields last_bare (the year of the last bare soil, 0 - never) and woody_pct (the share of trees in percent). The result line gives the number of spring and autumn images and the years of the series.

Limitations. Perennial hay grasses and winter crops sown before the autumn image are never bare during the series and come out as fallow land or as a field abandoned 1-2 years. A year without a single cloudless image is skipped. A field merged with a neighboring meadow into one area of the summer image gets one class for both. In that case decrease the smallest area in More settings.

Minerals by spectrum

The Minerals by spectrum... item of the Site analysis submenu of the globe menu opens a window that compares image spectra with the references of the USGS Spectral Library Version 7. The module carries 1657 references - minerals, soils and mixtures, vegetation, coatings, artificial materials, water and snow. USGS has resampled the reference values to the bands of ASTER, Sentinel-2 and Landsat 8.

The window finds an image itself. The ASTER images list shows only scenes that suit minerals - ASTER of 2000-2006 with SWIR bands, taken in daytime with the sun at 25° or higher, with cloud cover up to 10 % and data on at least half of the site. The least cloudy are on top. If the project has no suitable image, the search starts when the window opens, the Find button repeats it for a new site. Load or a double click on a row puts all bands of the image over the site as a project layer in the ASTER group and sets it in the Raster field. The SWIR bands of ASTER worked until 2008, the open copy of the images ends in 2006.

The Raster field lists only project rasters with six bands or more, three-band combinations, basemaps and elevation are not shown there. An own image in reflectance also fits, for example All scene bands of Sentinel-2 from the Satellite images window. The module recognizes the bands by the wavelengths in the band descriptions, for example "B3N 0.82 um" of ASTER or "B8A nir08" of Sentinel-2, thermal bands do not take part. The line under the Bands list names the sensor and the number of recognized bands. Without descriptions the sensor is chosen by hand, then the bands are taken by the numbers in the descriptions or in their order.

A click on the image on the globe while the window is open shows the pixel spectrum on the chart and the five nearest references with the angle between the spectra. The reference curves are scaled to the pixel brightness, so the shape of the spectrum is compared. The check box of a reference in the Nearest list or in the main list marks it as a class. The main list is filtered by group and by words of the English name, for example kaolinite or alunite. The default group is Minerals, the choice is remembered.

The measure of similarity is the angle between spectra (Spectral Angle Mapper). The angle does not depend on the overall brightness, so a slope in shadow and in sun gives the same answer. The Build button assigns each cell of the site to the marked reference with the smallest angle. A cell whose angle to all references is larger than the Angle up to field stays without a class. The site and the pixel are the same as in the Classification window. A legend in the corner of the globe shows the color, the name and the share of the site of each class, the cross of the legend removes the result.

The more bands, the better the substances differ. By three bands different minerals give the same spectrum, so band combinations do not get into the Raster field. An image without band descriptions, with the sensor chosen by hand and fewer than six recognized bands, gets a warning.

OK writes to the calculation subgroup a class raster with the reference names and the raster Angle to the reference, °. A small angle is a close match of the spectrum shape.

The references were measured in the laboratory on pure samples. An ASTER pixel of 15-30 m mixes several materials, so a class tells about the similarity of the spectrum, not about the composition of the rock. The raster must be in reflectance. Images of radiance or digital numbers give angles with an error. ASTER bands 1 and 2 of some scenes were taken at high gain, this shows as too high reflectance of the visible bands. The ASTER mineral ratios of the Satellite images window complement this window - they pick out mineral groups without a choice of references.

EMIT minerals

The EMIT minerals... item of the Site analysis submenu of the globe menu opens a window of ready NASA mineral maps. The team of the EMIT spectrometer on the ISS builds them from images with a 60 m pixel by the Tetracorder method - the spectrum of a cell is compared with USGS references. The images are taken since August 2022 over arid regions - deserts, semi-deserts and steppes.

The window searches the NASA catalogue for scenes over the site for all years of the survey when it opens, the Find button repeats the search for a new site. The list shows only suitable scenes - cloud cover up to 30 % and the scene over half of the site or more, at most 30 rows. The least cloudy and the widest covering are on top. A line of the list names the date, cloud cover and share of the site under the scene. Below is the picture of the selected scene. The site is shared with the other analysis windows.

Minerals are identified in two groups. Group 1 - iron-bearing minerals by absorption bands of 0.4-1.3 μm, for example goethite and hematite. Group 2 - clays, mica, carbonates and sulfates by bands of 2.0-2.5 μm, for example kaolinite, montmorillonite and calcite. One cell may hold minerals of both groups.

The Build button downloads the scene file and colors the site by the minerals of the selected group. NASA gives the files by an Earthdata key, the same as for ASTER images after 2006, see NASA Earthdata key. The scene file is downloaded once and kept in the PlanetX/emit folder of the QGIS profile, a change of group does not download it again. The line under the fields names the minerals of the site with their shares.

OK writes to the calculation subgroup a mineral raster with their names and the raster EMIT absorption band depth. The band depth grows with the share of the mineral in the cell, but it also depends on grain size, so it is not taken as a share.

Earthwork

The Earthwork... item of the Site analysis submenu calculates how much soil has to be excavated and placed for a site to become a level pad. The site is shared with the other analysis windows, and it can be drawn as a polygon.

The Build button loads the heights of the site and sets the elevation at which cut equals fill. On the globe cut is red and fill is blue, and the color gets stronger farther from the pad. The Pad elevation field sets another elevation, and the volumes and colors change at once. The Equal volumes button returns the elevation of equal volumes. The pad is horizontal, and slopes are not calculated.

Open height models are off by meters. On one hectare an error of 3 m is 30,000 m^3, so without your own relief the window calls the result an estimate and says how much it may change. A calculation without this note uses your own survey, a raster with the Globe relief item. If the raster covers a part of the site, the window gives its share.

OK writes the raster "pad elevation minus relief" to the calculation subgroup. Plus is fill, minus is cut, and the volumes are in the layer description. This globe layer is shared with the viewshed from a point, classification and similar areas.

The difference of two surveys is calculated by an item of the raster menu, see Cut and fill.

Flooding

Flooding, water flow and sea level are in the Site analysis submenu of the menu on the globe. The Flooding… item opens the Flooding window for the point under the cursor, the site is up to 100 km. The Build button loads the heights of the site and puts the water level 2 m above the point. The Water level field sets the elevation of the water surface above sea level, the Rise slider lifts the water up to 50 m above the point. The water on the globe and the summary under the fields change at once, without a new calculation.

Water fills everything below the level inside the site that it reaches from the point through places below the level. A basin behind a ridge higher than the level stays dry, even if its bottom is lower. The summary gives the area, the water volume and the greatest depth. If the water reached the edge of the site, the window says so, then a larger site is needed. A point in a river or in the sea shows the rise of water in them. The grid has 601 nodes per side, for a 10 km site the step is about 17 m. The heights come from the terrain of the globe, with the 30 m model and own terrain when they are on. The water is visible with the terrain switched on.

OK writes a depth raster and a GeoPackage flood outline next to it to the calculation subgroup. The water on the globe stays together with the depth raster. Clearing the check box of the raster or removing it removes the water too.

Water flow and catchment

The Water flow… item of the Site analysis submenu opens the Water flow window for the point under the cursor, the site is up to 100 km. The Flow line button traces the path of water from the point down the terrain and writes it as a line layer with its length and drop. The Catchment button builds the area from which water flows to the point and the main stream as two layers. All of them go to the calculation subgroup and are checked on the globe at once. The catchment outline keeps the area, the heights, the length, fall and gradient of the main stream, the mean hillslope gradient by SP 33-101-2003 and the stream network density. The catchment starts at the channel, the place with the largest catchment within the Channel search radius field of the point, 150 m by default, so a click near a river gives the catchment of the river. With 0 the catchment starts exactly at the point.

The calculation uses D8 flow directions over the terrain with the depressions filled up to their spill level. So the line passes through lakes and closed basins. There are no heights outside the site, water leaves there as over an edge. The line ends at the edge of the site, a catchment larger than the site is not counted in full, the window says so. The calculation is ported from the Isoliner plugin.

The Stop at a stream check box ends the line where it reaches a stream with a catchment of at least the Streams from field. The Stop where the slope flattens check box ends it where the mean slope over the Segment length field is below the Flattening slope field, 2° over 50 m by default. This is the foot of a slope, a terrace or a floodplain, a short ledge on a steep slope does not end the line. The line keeps the reason it ended.

The Basins button divides the site into basins of outlets, the places where streams with a catchment of at least the Streams from field leave the site. The basins go as a GeoPackage polygon layer to the calculation subgroup, each keeps its number and area, the largest first.

The Stream network button builds the streams of the site with a catchment of at least the Streams from field and writes them as a GeoPackage line layer to the calculation subgroup. Each line keeps its Strahler order and catchment area, the line width grows with the order. The smaller the Streams from field, the denser the network. The Order from field keeps streams of at least the given order. A source has order 1, the confluence of two streams of the same order raises the order by one. The orders are counted over the whole network, so a large river keeps its order at any value of the field.

The Placemark catchment item of the menu of a path or polygon in My Places builds the area from which water comes to the placemark. A path serves as a cross-section of a valley or a ditch, a polygon as a plot. The catchment outline goes as a polygon layer to the Placemark catchment subgroup with the outline of the calculation square, it keeps the area and the heights. If the catchment reaches the edge of the square, the square grows 2.5 times and the calculation repeats until half its side reaches 50 km.

The Flow lines from placemark... item of the same menu opens the Water flow window for the placemark, the site is a square covering it. The Flow line button builds lines from all grid nodes under the placemark, for example from a waste dump, and writes them as one line layer. With the Stop at a confluence check box a line ends where it joins a line built earlier, and a shared channel is one line. The lines go from high nodes to low ones, at most the 300 longest go to the layer. The stop at a stream and where the slope flattens check boxes apply to these lines too.

Sea level

The Sea level... item of the Site analysis submenu opens the Sea level window. The field and the slider set the level above the present one, from -130 to +100 m. Water fills everything below the level over the whole globe. The connection with the sea is not checked, so lowlands inside continents are flooded too, with a raised level also land below zero, for example the polders of the Netherlands. A level below zero uncovers the shelf and switches on the sea and ocean depths. About -120 m is the last glacial maximum, about +70 m is the melting of all glaciers. The Present button returns the level to 0. The water is visible with the terrain switched on.

Subsurface mode

The Subsurface mode... button of the View properties window and the ... button of the Ground above grids row of the Layers section open the Subsurface mode window. The mode shows drill holes, bed roofs, section walls and a block cut under the surface.

Data

The data are tables in the same layout as in Isoliner.

Table	Fields	What it sets
collar	hole_id, z, eoh, point geometry	Hole collar, collar elevation, end-of-hole depth along the hole
interval	hole_id, from, to, code	Intervals along the hole, positive downward, code is the bed or lithology
survey	hole_id, depth, azimuth, dip or zenith	Survey. Without it the hole is vertical
beds	code, ord, color, surface	Order of beds from top to bottom, colour "#rrggbb", roof raster file
sections	line geometry	Section lines
cut	polygon geometry	Block cut
images	name, image, top, bottom, line geometry	Image section: a PNG or JPG file relative to the folder of the GeoPackage file, elevations of the top and bottom of the image in metres
tunnels	name, depth, depth_end, diameter, color, line geometry	Tunnel: depth of the axis below the surface at the start and the end of the line, diameter in metres, colour "#rrggbb"

Fields are also found by other common names, for example bhid, elev, td, from_m, to_m, litho. A dip angle with negative values is counted from the horizontal, -90 is straight down. A bed roof is a raster of elevations in metres in any coordinate system, GDAL reads it.

Geological project layers show in 3D as ordinary globe layers. A layer is recognised by a table name from the list above or by its fields, for example a point layer with the fields hole_id and eoh is collars. A layer checked in QGIS project goes under the surface, an unchecked box removes it. Such layers are not drawn as a flat image on the surface. A roof is a raster whose file is named in the surface field of the beds table. The interval, survey and beds tables are taken from the project by themselves, first from the same layer group.

The path to a section image is relative to the folder of the file of its layer. When the project has several layers of one role, the top one in the layer tree is taken.

The style comes from QGIS, as with ordinary layers:

- a roof whose raster is coloured with a pseudocolour ramp, a palette or RGB takes this colouring. A grey raster without settings takes the bed colour from the beds table.
- a hole without intervals and a tunnel take the colour of the feature symbol when the layer style is categorized, graduated or rule-based. With a single symbol the colour comes from the color field, without it the mode uses its own colour.
- the opacity of a QGIS layer is the opacity of its objects under the surface.
- the labels above the collars are the labels of the QGIS collar layer, from a field or an expression. With the layer labels off there are no labels.

After the style or data of a layer is edited, the globe rebuilds the model as with ordinary layers. The Create template... button of the Subsurface mode window writes a GeoPackage file with all tables of the mode and an example at the view point - a drill hole with two intervals, a section, a tunnel and a cut - and adds it to the project as the Subsurface template group. The template tables are filled with your own data.

Grids by elevations

A project raster whose values are absolute elevations in metres lies under the ground as a surface. For this the Surface by elevations item is checked in the raster menu of the QGIS project section. The layer box shows and hides the surface. The raster coordinate system comes from the QGIS layer, so an ASCII Grid without a .prj file also fits.

The surface colour is the QGIS raster colouring. A grey raster without settings takes the bed colour. Grids whose names end with _top and _bottom, for example B_top and B_bottom, are the top and the base of one bed. They take one colour, end walls stand between them along the data edge, and the bed looks like a slab. The endings roof, base and their Russian words also fit.

Contour lines lie on a grid surface, about 12 lines over the range of elevations, with an interval from the same series as the terrain contours. Every fifth line is thicker and darker.

A vector layer with Z elevations - polygons or lines - stands as a solid with the Solid by Z elevations item of its menu in the QGIS project group. Polygons lie as planes at the elevations of their vertices, lines as tubes. This way, for example, the 3D fence of an Isoliner3D section stands - vertical bed polygons along the section line. The colour is the color field of the form #rrggbb, without it the QGIS layer style. A click in the Identify mode shows the fields of the object and the elevation under the cursor. The elevations are stretched by the terrain scale, as the grids, the Ground above grids slider makes the ground above them transparent. Where nothing lies under the transparent ground, a light background shows, from pale blue at the top of the frame to almost white at the bottom. The background lies only under the frame of the model, the sky and space around it do not change.

With terrain off, the elevation of a layer with Z is counted from the surface by default, like the depth of drill holes and beds. So terrain contours with Z lie on the ground without terrain. The True Z elevations item of the same menu puts the vertices at their elevations above sea level, and the contours rise above the flat Earth. With terrain on, the item changes nothing.

The Contours to the QGIS project... item of the raster menu exports contours of the raster values as a GeoPackage layer to the PlanetX - contours group. The interval is the same as on the globe grid, every fifth line is thicker and labelled.

A block is built under the grids. Walls with beds stand along the data edge from the terrain to the model bottom, a floor lies at the model bottom. The walls darken with depth. A wall facing the camera from outside is not drawn, so the block is seen from inside from any side. Above the block the ground is transparent by the Ground above grids slider of the Layers section, outside the data outline it is opaque. The slider row appears together with the underground model.

Thin beds are easier to see with the vertical terrain scale of the View properties window. The scale stretches depths too.

Display

The model is built when at least one geological layer is checked. The globe loads the terrain heights under the model and puts it under the surface.

- A drill hole follows the survey by the minimum curvature method. Intervals take the colour of their bed, the layer label stands above the collar.
- A bed roof is a surface in the colour of the bed.
- A tunnel is a tube of its diameter along the line below the terrain. The depth changes from depth at the start of the line to depth_end at its end, this sets a ramp to a portal. Without depth_end the depth is constant, without diameter it is 3.7 m.
- A section is a set of walls along the line from the terrain to the model bottom, beds between the roofs have their own colours.
- An image section is a vertical wall along the line from the top elevation to the bottom elevation with the image stretched on it. The left edge of the image is the start of the line, its top is the top elevation. An image larger than 4096 pixels on the longer side is scaled down.
- The model bottom is the end of the deepest hole, without holes it is 20 m below the deepest roof.

Depth is stretched by the terrain scale, like the surface. With the terrain off, elevations are counted from the surface.

The Surface opacity slider makes the terrain inside the model frame transparent, the drill holes and roofs show through it. Outside the frame the surface stays opaque, with grids - outside their data outline. The Block cut checkbox removes the surface and the roofs inside the cut polygon. Walls with beds stand along the cut edge, a plane at the model bottom lies at its floor. The Camera under ground checkbox lets the camera go below the terrain down to the model bottom. Inside the model frame the camera then moves along its bottom. The window settings are kept in the project.

A polygon of My Places cuts the model with the Model cut item of its menu, a path puts a wall with beds with the Model section wall item. Choosing the item again removes the cut or the wall. Editing the shape of the place changes the model at once. So a cut and a section are drawn on the globe with the New placemark tool.

The Beds legend in the bottom left corner of the view shows the beds of the model from top to bottom in their colours and the tunnels. When the layer of collars, tunnels, intervals or beds lies in a group of the project layers, the name of that group is the title of the legend.

In the Identify mode a click on a drill hole shows its number, the bed, the depth along the hole and below the collar, the elevation and the end of hole at the point under the cursor. A click on a tunnel shows its name, the depth and elevation of the axis and the diameter.

The Model section... item of the path menu in My Places opens the window of the same name. The horizontal axis is the distance along the path, the vertical axis is the elevation in metres. The section shows the terrain, the beds between the roofs, the drill holes in the colours of their intervals and the tunnels at their diameter from a band along the path. The Band of holes and objects field sets the band width. The cursor over the chart marks the point on the globe, the caption at the top of the chart gives the distance, the terrain and the roof elevations under the cursor.

This is also a geological section by the project layers. The list on the left of the window gives the project layers with checkboxes:

- Roofs - rasters - any single-band elevation rasters of the project, for example grids of bed roofs and bottoms. The Surface by elevations item and a subsurface model on the globe are not needed for the section. The order of the beds follows the beds table, without it the mean elevation of the roof from top to bottom.
- Drill holes - the project collars with intervals and surveys.
- Layers with Z - lines and polygons with Z elevations, for example the 3D fence of a section from Isoliner3D. Their parts in the band along the path go onto the section in their colour - fence walls filled, lines as lines.

By default the layers of the subsurface model of the globe are checked, without it the surfaces by elevations and the layers with the Solid by Z elevations item, and if there are none, all rasters and layers with Z of the project. A raster without its own coordinate system takes the system of the QGIS layer. The bed colours are named in the top right corner of the chart. The Picture... button writes the section to a PNG file, CSV table... writes the elevations of the terrain and the roofs at 400 points of the path with latitude and longitude, an empty field where there is no roof.

A bed between a roof and a bottom (grids ending in _top and _bottom, roof and bottom) is shown in the bed colour, the gap below a bottom and above the first roof in the colour of the rock between beds. Each roof and bottom is outlined with a line in a darker bed colour. The right button on the chart sets an own colour of the bed, of the rock between beds or of the line under the cursor, the Default section colours item removes the own colours. The own colours are kept in the QGIS project and apply the next time the window opens.

The subsurface demos put their data into the QGIS project as a group of ordinary layers and check them on the globe. The Permian deposits demo in the Demo icon opens a synthetic site near Berezniki, on the Verkhnekamsk deposit. It has 24 drill holes, 9 bed roofs of the Verkhnekamsk section, two sections, a cut of the north-east quarter and the image section 3-3. The data are made up for the example, they are not a survey.

The Vegas Loop tunnels demo opens the tunnels of The Boring Company under Las Vegas with their stations, about 8 km of lines. The routes and stations come from OpenStreetMap. OpenStreetMap has no depth, the tunnel axis is 12 m below the surface, about 40 feet after public information on the Las Vegas Convention Center tunnels, and ramps to the stations go from the surface down to this depth.

Tours

A tour flies over the checked places of a folder in the list order, including nested folders. At a stop the name and the description of the place stand large at the bottom of the frame - the stop caption. It appears when the camera stands at the stop and fades before the next flight, during a flight there is none. The caption also goes into the tour recording. The  button of the tour bar turns the captions off, then the description stands as a line under the buttons of the bar.

- A place with a view of its own brings back its look point, range, heading and tilt.
- Along a path the camera travels the line.
- Other places are framed whole.

A tour starts with Play tour in the menu of My Places or a folder. A path has Tour along the path in its menu. The ▶ button under the places list starts a tour too. It tours the selected folder or path, and with a place selected it tours the folder holding the place. A tour goes through the places of the body now on the globe. When no places are checked, the status line says so.

The tour bar appears at the top of the view as a second row under the time slider, and without the slider in its place:

Button	What it does
Slider	Shows how much of the tour has passed and winds the tour. The camera moves to the chosen point at once, after release the tour goes on from it
⏮, ⏭	Previous and next stop
⏸, ▶	Pause and continue
Pause	How many seconds the camera stays at a stop
🔁	Loops the tour. After the last stop the tour starts again from the first. The button state is kept between sessions
abc	Stop captions on the frame, on by default
●	Records the tour to an MP4 video or PNG frames
■	Ends the tour

Moving the camera with the mouse during a flight pauses the tour. During the pause at a stop the view can be turned with the mouse, the wheel and the keys while the tour goes on. When the pause ends and the mouse button is released, the camera flies from the new view to the next stop.

During the tour these keys work when the view has the focus:

Key	What it does
→	Next stop
←	Previous stop
Space	Pause and resume
Esc	Ends the tour. In Full screen mode the first Esc leaves the mode

The arrows with Ctrl, Shift or Alt still move the camera.

Recording a tour from the screen

The record button ● on the icon bar records the camera movement. The camera can be moved with the mouse, keys, flights and the navigation controls. A second click ends the recording and asks for a name. The tour goes into My Places with a film icon and is not drawn on the globe.

Play tour in the menu of such a tour plays the recording. The camera first flies to the start of the recording. The slider of the tour bar and tour recording work as for a tour over places. In KML a recorded tour is saved as `gx:Tour`, and Google Earth plays it.

The path of a recorded fly-around is edited in the Properties... window of the tour. While the window is open, the path of the view point is shown on the globe as a line with twenty key points. A key point is dragged with the mouse, the poses between key points follow it smoothly. The Fly-around height slider lowers the camera

in all poses down to a quarter of the recorded height or raises it up to four heights. Time, heading and tilt of the poses do not change. OK saves the edit, Cancel discards it.

How to make a video

1. Put the stop places into one folder of My Places. Snapshot view in the menu of a place sets its view.
2. Check the places you need and drag them into the flight order.
3. Switch on the layers of the video - a NASA theme, the sun, clouds or the time slider at the day you need.
4. Play tour in the folder menu plays the tour. The pause at a stop is set on the tour bar.
5. The ● button of the tour bar opens the Tour recording window. The MP4 video at the window size mode gives the video at once. The video size equals the size of the globe window, so stretch the window beforehand.

Instead of places, the ● button on the icon bar can record the camera movement, see Recording a tour from the screen. A tour along a My Places path leads the camera along the line.

Recording a tour for a video

The ● button opens the Tour recording window with two modes. Both write 25 frames per second of the tour, the source credits stand in the corner of each frame.

- MP4 video at the window size is the quick mode. The window asks for a file name, at the end of recording an H.264 clip is ready. Windows itself encodes it, no other programs are needed. The mode exists only on Windows. A tour of two stops, 71 frames of 2592 × 1860, is written in about 45 s and takes 10 MB.
- PNG frames to a folder is the professional mode. The window asks for a folder and a size - as the window, 1920 × 1080, 2560 × 1440 or 3840 × 2160. A frame larger than the window is drawn anew at this size, labels and lines grow in the same proportion. The files are named `frame_00000.png`, `frame_00001.png` and on, frames with the same numbers in the folder are replaced.

Each frame waits for the tiles, so recording takes longer than the tour and the frames have no blurred spots. A frame that waits longer than 20 seconds is taken as it is. Recording always starts at the first stop, so a repeated recording gives the same frames.

A file `frames.json` lies next to the PNG frames - frame rate, size, camera pose and data time of each frame, numbers of frames that did not fully load.

The bar shows the frame number. The cross on the bar stops the recording. A stopped video stays a valid file of the frames already written.

Making a video from the frames

Any program that opens an image sequence assembles a video from the PNG frames.

The free program ffmpeg (ffmpeg.org) makes an MP4 with one command in the folder with the frames:

```
ffmpeg -framerate 25 -i frame_%05d.png -vf "pad=ceil(iw/2)*2:ceil(ih/2)*2" -c:v libx264 -pix_fmt yuv420p -crf 18 tour.mp4
```

The rate 25 matches the recording rate, so the video runs at the pace of the tour. The `pad` filter adds a pixel when a frame side is odd, the H.264 codec needs even sides. A smaller `-crf` value gives better quality and a larger file.

The video editors Shotcut and DaVinci Resolve open numbered frames as one clip. Music, captions and several tours joined together can be added there.

Tracks

A track shows the path of moving objects over time. The source is a point layer of the project with a time field, and the time slider of the globe sets the time. The QGIS Temporal Controller does not act on the globe.

The Track… item in the menu of a point layer opens the settings window:

Field	What it sets
Time	A field with date and time, ISO 8601 text or seconds since 1970
Object	A field that tells the objects apart. One object - all points form one path
Color	Color of the travelled path
Camera follows	The camera keeps the first object in the middle of the view along the motion
3D model	A glTF, Collada or OBJ model file. An empty field shows the object as a placemark
Model scale	The size factor of the model, 1 - the size from the file in metres
Model turn	The clockwise turn of the model to the direction of travel
Height	Where the height of a point comes from: the point Z or a numeric field. On the ground - the object stands on the terrain
Height reference	Above sea level - the flight altitude, above the ground - the rise over the terrain under the point
Height units	Metres or feet. ADS-B aircraft altitude is given in feet

With a model file every object of the track gets its own model moving along the path. Its front faces the direction of travel. The direction is taken along the track path over the last 30 s. A glTF model facing the viewer gets a turn of 180°. A model with node animation moves along and moves its parts.

A track is shown while its layer is checked in the QGIS project section. The Track window checks the layer itself, an unchecked layer removes the path, the objects and the models from the globe.

The Camera follows item of the right-click menu over a track object makes the camera follow this object rather than the first one. The object stays in the middle of the view along the motion. The mouse wheel changes the distance to the object, the right button with a drag the tilt. Esc or the unchecked menu item releases the camera. So in the Haul trucks, Kachkanar demo one can ride with a truck from the pit bottom to the dump.

With a height the object and the model rise above the ground. Between points the height changes evenly in time. A path with the height above sea level is drawn in the air at the heights of its points, a path with the height above the ground lies on the terrain. A track of an aircraft by GPS or ADS-B points shows the take-off and the landing this way.

The time of a track enters the extent of the time slider. Each object grows its travelled path up to the right handle of the slider, and a label with its name marks the current point. With the slider closed, whole tracks are shown. The Remove track button returns the layer to its usual look. Track settings are stored in the project.

During a tour recording the tracks grow along the tour over the range of the open slider, with the slider closed over the whole track time.

Trains of Finland

The Trains of Finland row of the Transport category of the Add data catalogue shows all trains of Finland in real time. The train positions are Fintraffic Digitraffic open data under the CC BY 4.0 licence. The service updates them every 10 s, and the plugin asks at the same step. It asks for the type and category of the trains every 5 minutes.

From afar a train is a dot in the colour of its category with a label, for example "IC 9", or "R 9123" for a commuter train of line R. When the view strip is narrower than 6 km, a train is shown as a consist of schematic cars in the colour of its category. A long-distance train has 6 cars, a commuter train 4, a cargo train 12, a locomotive one. The service gives the real length of a consist with a separate request, and the plugin does not ask for it.

Colour	Category
red	Long-distance
purple	Commuter
blue	Cargo
orange	Locomotives
grey	Shunting
yellow	On-track machines

A train whose type the service has not given yet is light grey.

Between updates a train moves at its own speed for no longer than 30 s. When the view strip is narrower than 8 km, the plugin takes the rails from the OpenStreetMap vector base map tiles at the point of view. A train point closer than 40 m to the rails is set on them. The train moves along the rails and through switches, and the cars of the consist bend along the track. The train takes a new position smoothly over 2 s.

A click on a train opens the Features window with the type, category, line, operator, number, speed and time of the position. The Camera follows item of the right-click menu over a train puts it in the middle of the view with the heading along its travel. The camera starts 1.5 km from the train, the wheel moves it closer and farther, the middle mouse button changes the tilt. Esc, clearing the item, turning the row off or recording a flight releases the camera.

While a flight is recorded the trains move by the tour time, a frame of the video is 1/25 s of their travel even when the frame with loading took several seconds. The start is the computer clock at the moment of the recording, and new positions are not requested during it. After the recording the trains follow the computer clock again. The Trains of Finland, live demo puts the camera above the tracks at Pasila station in Helsinki.

Baltic ships and aircraft

The Baltic ships and Aircraft rows of the Transport category of the Add data catalogue show ships and aircraft in real time. From afar an object is a dot in the colour of its group with a label, no more than 600 nearest to the point of view are shown. Close up an object is a schematic model that keeps its course and speed between updates. A click opens the Features window with details. A flight recording moves ships and aircraft by the tour time, like trains.

Close up an object keeps its dot with the label while it is farther than 150 of its lengths from the eye - the model is smaller than about 10 pixels there. An aircraft 40 m long is shown as a dot farther than 6 km, a ship 100 m long farther than 15 km. The dot of an aircraft is at its altitude.

The Camera follows item of the right-click menu over a ship or an aircraft, as for a train, keeps the object in the middle of the view with the heading along its course. The aircraft lies on the view ray at its altitude, the point of view is the ray continued to the ground ahead. The wheel changes the distance to the aircraft, the middle button the tilt. Under the follow camera the object is shown as a model at any distance.

Ships are AIS signals of the Gulfs of Finland and Bothnia and the Baltic near Finland, Fintraffic Digitraffic open data under the CC BY 4.0 licence. The positions come every 20 s, the names, types and sizes every 10 minutes. The ship model close up (view strip narrower than 20 km) is a hull of its AIS length and width with a superstructure at the stern, at the water level. The colour shows the type group - passenger, cargo, tankers, fishing, tugs and service, high-speed, yachts and boats.

Aircraft are ADS-B signals of the adsb.lol volunteer network in a circle around the point of view, every 10 s. An aircraft in the air is shown at its altitude, on the ground on the terrain. Between updates a turning aircraft follows an arc, its turn rate comes from ADS-B or from the difference of the courses of two positions. The model nose rises with the vertical speed, the bank comes from ADS-B, without it from the turn rate. The model close up (view strip narrower than 15 km) is a schematic aircraft of the size of its ADS-B category with its bank. The fin colour shows the category - light, small, airliners and freighters, heavy, helicopters. The network has almost no receivers over Russia, and no aircraft are seen there. The licence of the adsb.lol output is not named as of 19 October 2026.

Flight mode


The Flight submenu of the right-click menu on the globe puts your own aircraft 1000 m above the clicked point - a fighter jet or a propeller aircraft. The aircraft flies along the view heading, and the camera follows it from behind and above. The flight works above the Earth and above the other bodies of the Body menu.

Aircraft	Start speed	Top speed	Stall
Fighter jet	900 km/h	about 2000 km/h	250 km/h
Propeller aircraft	250 km/h	about 340 km/h	100 km/h

Key	Action
up arrow	nose down
down arrow	nose up
left and right arrows	bank and turn to the same side
PageUp, PageDown	more and less thrust
V	cockpit view and back
H	cockpit instruments or the readout
Esc	end of the flight

Without keys the bank returns to zero by itself, the pitch stays. The fighter jet banks twice as fast as the propeller aircraft. Below the stall speed the nose drops by itself. At the bottom of the view a readout shows the speed, the altitude above sea level and above the ground, the heading, the vertical speed and the thrust. The wheel changes the distance from the camera to the aircraft, the middle mouse button the view tilt. From the cockpit the model is not shown, the view looks along the heading with the aircraft pitch, and the frame tilts with the bank. In level flight the horizon is in the middle of the frame, with the sky above it. In the cockpit green instruments on the windscreen replace the readout. These are the pitch ladder with the horizon line turned by the bank, the aircraft symbol in the middle, the heading tape at the top, the speed

tape in km/h on the left and the altitude tape above sea level in metres on the right. Below them are the vertical speed, the thrust and the height above the ground. The horizon line of the ladder matches the horizon in the frame.

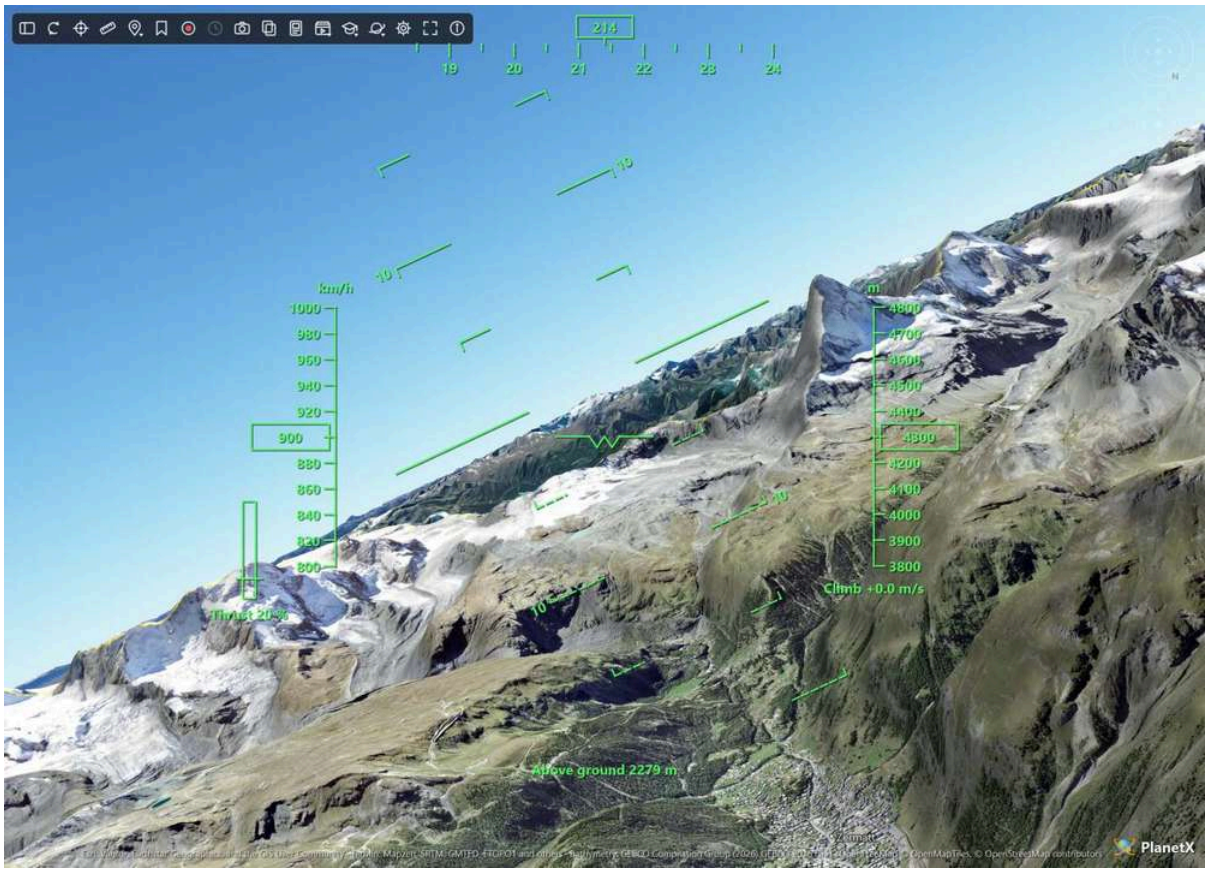

Touching the ground ends the flight. A flight recording also ends it - the recording drives the camera.

Project layers with time

A project layer with time switched on in its QGIS temporal properties is shown on the globe within the range of the time slider. The time of the layer enters the extent of the slider. The picture of the layer and its labels are redrawn after the handles stop. With the slider closed, the layer is shown in full.

Project layer swipe

The swipe compares project layers without map years and the time slider, for example orthophotos of two surveys or a design and an image. The Swipe submenu of the layer menu in the QGIS project section sets the side of the layer - Left, Right or Both sides. A Left layer is shown only left of the swipe, a Right layer only right of it, the other layers on both sides. The mark of the side, ◧ or ◨, stands before the layer name.

The first side switches the swipe on and puts the layer on the globe. The swipe is dragged with the mouse, the tags above it name the layers of the sides. A side without its own layers shows the shared layers and the base map. The ⇆ Layer swipe button under the section list switches the swipe on and off, the cross of the tag also removes it. The sides of the layers are kept in the project.

The swipe of NASA map days and the swipe of historical map years remove the layer swipe - the swipes share the left part of the view.

Historical maps

A historical map is a raster, XYZ tiles or a ground image with a year. Maps of one group replace each other on the time slider. The last map not later than the slider moment is shown, before the year of the first map of the group none is shown. The ◂ ▸ steps of the slider go by the map years. With the slider closed, all maps are shown.

The Map year... item of the layer menu in the QGIS project section sets the year of a project raster or tiles. Maps of one QGIS layer group replace each other. The years are kept in the project.

The year of a ground image is the Time field of its properties window, for example «1890». Maps of one My places folder replace each other. In KML the map year is a `TimeStamp` of a `GroundOverlay`. An image with a span, for example «1890/1910», is shown within its span, like a place.

The ⇆ button of the slider opens the swipe of two years. Left of the swipe is the map of the previous map year, right of it is the map of the slider moment. The swipe is dragged with the mouse, the arrows on the left label change its year. A step before the first map leaves the imagery without maps on the left.

The Moscow, historical maps demo puts maps of Moscow of 1813, 1860, 1900, 1917 and 1935 from Wikimedia Commons into the project. The maps are in the public domain, members of the Wikimaps Warper project georeferenced them, the tiles come from its server.

The Rumsey historical maps... item of the globe menu opens the Rumsey maps window - maps of the David Rumsey collection at the view. The collection holds about 57 thousand georeferenced maps from the 13th to the 21st century. The list goes by year, a click on a column header sorts by title or scale. The list holds 400 maps closest to the place by extent. The search line picks maps by year or title, the Whole catalogue check box searches among all maps of the collection. Frames of the listed maps are shown on the globe, the frame of the chosen map is brighter, the Show on the globe button flies to it. The To QGIS project button builds the chosen map from the collection image and georeferences it by the collection control points. The map goes into the Rumsey maps group at the top of the project with the map year and takes its place on the time slider, with maps changing by year and the swipe of two years. Building takes 5-15 s, a ready map is kept in the QGIS profile and is not downloaded again. The Map page button opens the page of the map on the collection site.

The collection images are published under CC BY-NC-SA 3.0, it allows only non-commercial use with credit to the source. The georeferencing was done by members of the collection, for some maps it is rough or wrong.

The Eto Mesto old maps... item of the globe menu opens the catalogue of the Eto Mesto site (etomesto.com) - georeferenced old maps of Russia and the former USSR - city plans, survey atlases, the Schubert and Strelbitsky maps, Red Army maps, wartime aerial photos. The window shows the year and title of the maps that cover the point, near Perm there are more than two hundred. The search line picks maps by words of the title or by year. A double click or the Open on the site button opens the map page in the browser at this point. There the map is overlaid on a modern one and downloaded under the site rules, the site gives the files for personal non-commercial use. The plugin does not show the maps themselves on the globe. The catalogue has no map frames, so the globe shows none either.

Satellites

The Satellites layer of the Add data catalogue shows artificial satellites of the Earth as dots at their height. The Satellites tab of the catalogue chooses the groups, any of them can be on:

Group	What it holds
Space stations	the ISS, Tiangong and the docked spacecraft

Group	What it holds
Bright satellites	about a hundred satellites and stages visible without binoculars
Navigation	GPS, GLONASS, Galileo, BeiDou
Weather satellites	weather satellites
Earth observation	imaging satellites, Landsat and Sentinel among them
Science	science satellites and observatories
Geostationary	active satellites at about 36 000 km
Starlink, OneWeb	communication satellites, thousands of dots

CelesTrak gives the orbital elements of the groups. The position is calculated by the SGP4 model for the right handle of the time slider. With the slider closed, the satellites follow the computer clock. A satellite whose elements are older than 30 days at that moment is not shown.

CelesTrak updates the elements once in 2 hours and asks to download a group no more often. A downloaded group is kept in the QGIS profile, and a new request goes no earlier than 2 hours later. After a refusal of CelesTrak the group is not requested for 2 hours.

A click on a satellite dot with identification on opens the Identify window with the name, the NORAD number, the group, the height, the speed and the age of the elements. The satellite becomes the selected one.

The selected satellite shows its orbit loop at its height and its ground track. The loop shows one revolution ahead of the moment, the track shows the path of the point under the satellite half a revolution back and ahead. A right click on a satellite dot opens a menu with its name and two items:

- Orbit and ground track shows or removes the loop and the track.
- Camera follows puts the look point under the satellite, the view turned along its motion. The distance and the tilt of the view change with the wheel and the mouse as usual. Choosing the item again releases the camera.

Scenes

A scene saves the whole view and can be passed to other people. The Scene icon opens the menu Save Scene… and Open Scene…. A scene file has the extension `.planetx`.

A scene holds:

- the camera pose.
- the range of the open time slider.
- the project layers checked on the globe, as a link to their source.
- the base map, terrain, terrain exaggeration, groups of the Layers section and the label language.
- the rows of the Layers section, the grid, stars, clouds, temperature and 3D buildings.
- the selected folder of My Places with its tour. The overlay images and 3D model files of the folder are stored in the scene file with it.

A database password does not go into the file, a link to a QGIS connection setting stays. When the whole My Places folder or nothing is selected, no places go into the scene.

When a scene opens, a layer is looked up in the project by its source and added if missing. The other project layers are unchecked on the globe. The places of the scene come in as a new folder, and the camera flies to the scene pose. The status line lists the layers that were not found and did not open.

Export to glTF and 3D Tiles

The Export to glTF or 3D Tiles… item of the Scene icon menu writes the volumetric objects of the view to a file. It takes the 3D buildings of the frame, extruded layers, the subsurface model and fixed 3D models. Terrain, imagery, placemarks, animation, models on tracks and live objects do not go to the file.

The file type is chosen in the save window:

- glTF (.glb) - one file for Blender and other modelling programs. The unit is the metre, the origin is the look-at point, the Y axis points up, X points east. The latitude and longitude of the origin are stored in the file information.
- 3D Tiles (.json) - a folder named after the file, with `tileset.json` and a file for each piece of the scene. The objects stand in their place on the Earth, the set opens in QGIS, Cesium and other 3D Tiles programs.

Heights are taken from the view, so the terrain exaggeration enters them. The line under the search box names it when it differs from 1.

QGIS globe

Since version 3.44 the QGIS 3D views have a globe mode. It shows the project layers by QGIS itself. The Open view in QGIS globe item of the Scene icon menu opens such a view with the PlanetX camera - the same look-at point, distance, heading and tilt. If the view is already open, the camera moves in it. The Take view from QGIS globe item flies PlanetX to the view of the open QGIS globe.

The project must hold at least one layer. The item does not work on other bodies and in the sky view. In QGIS before 3.44 the line under the search box names the required version.

Share view

The Share View… item of the Scene icon menu writes an HTML page. It opens in a browser without QGIS and PlanetX, it can be sent as a file or published on a site. After writing the page opens in the system browser.

The page holds:

- the globe with the camera of this view - the look-at point, distance, heading and tilt.
- the OpenStreetMap base in the OpenFreeMap style and Terrarium terrain with the terrain exaggeration of the view. Without terrain on the globe the page has no terrain either.
- the placemarks, paths and polygons selected in My Places, with their colours and labels. A click on a placemark shows its name and description.
- the Initial view button and the ▶ Tour button. The tour is the recorded tour from the selection. Without it the camera flies to the views of the placemarks in turn, to a point without its own view - from above at 3 km with a tilt of 45°.

The Esri base map, QGIS project layers, overlay pictures, placemark times and rows of the Layers section do not go to the page. The camera tilt on the page is not more than 85°. The page is built for the Earth only. The globe of the page is drawn by the MapLibre GL JS library, the browser loads it from unpkg.com, the tiles from the OpenFreeMap and Amazon servers. Without internet access the page is empty.

Demo

The Demo icon with an academic cap on the icon bar opens prepared scenes. Each scene puts its places into My Places as a new folder, the ▶ button under the list plays a tour over them. The folder can be deleted.

The files of the Quarry, own terrain, Lake Brienz, own bathymetry and 3D models, Suzdal and Perm demos are not part of the plugin. On the first opening the demo downloads them from GitHub into the PlanetX folder of the QGIS profile, from 0.8 to 3.5 MB. The status line tells about the download, then the scene opens by itself. Later the files are taken from the profile without the network.

Section	Scene	What it holds
Placemarks and tours	Boca Chica, Starbase	The Starbase launch site and factory, the beach, nearby towns, the highway from Brownsville, a recorded flight around the launch site
Placemarks and tours	Flow of goods, a scheme	Paths with flow from Berezniki to the ports of Ust-Luga and Vostochny by rail and from Ust-Luga to Rotterdam by sea. The paths are schemes through large cities and straits, not real routes
Imagery and maps	Aral Sea	MODIS images of 2000, 2014 and 2023 as a group of radio buttons, a photo of the ships at Moynaq and a basin map on the screen. All images are links to web addresses, see Image overlays
Imagery and maps	Super-overlay, Mountain View	Mountain View imagery in tiles of the Google sample - a network link onRegion, detailed tiles arrive when zooming in. See Super-overlays
Imagery and maps	Moscow, historical maps	Maps of Moscow of 1813, 1860, 1900, 1917 and 1935 as tiles in the QGIS project with map years, the Kremlin and the Cathedral of Christ the Saviour. See Historical maps
Subsurface	Japan Trench	Earthquakes, the Earth cutaway with a sector from the equator to 38.5° N, the Slab2 slab under Japan, the epicentre of the 2011 Tohoku earthquake, Mount Fuji. The Section window along 38.5° N opens with the demo, the foci band is 300 km
Subsurface	Permian deposits	A synthetic site near Berezniki with drill holes, roofs, sections and a cut. A tour of five stops explains the subsurface mode, see Subsurface mode
Subsurface	Vegas Loop tunnels	The Boring Company tunnels under Las Vegas with their stations, see Subsurface mode
Own terrain	Quarry, own terrain	A synthetic 1 m survey of a quarry near Berezniki as the globe terrain: 10 benches of 15 m, a waste dump, a path for the elevation profile. The raster goes into the QGIS project, see Own terrain
3D models and motion	3D models, Suzdal and Perm	Models of the Church of the Conception in Suzdal and of the Church of the Intercession of the Theotokos in Perm from Google Earth Pro, licence CC BY 4.0. See 3D models
3D models and motion	Animated model, wind turbines	Three glTF wind turbines with a rotating rotor at an arbitrary place near Perm. The model is synthetic, the rotor is a node with rotation keys. See 3D models
3D models and motion	Trains of Finland, live	Live trains of Finland as consists on the rails at the Pasila, Helsinki and Tikkurila stations. See Trains of Finland
Haul trucks in open pits	Haul trucks, Kachkanar and Haul trucks, Lebedinsky	Six model haul trucks in the Main pit of Kachkanar or in the Lebedinsky pit near Gubkin: loading, the loaded haul, dumping, the empty return. The route is a pit road traced on Esri World Imagery: in Kachkanar from the face at the bottom along the east wall, in the Lebedinsky pit along the switchbacks from the face with an excavator. The trucks are KML tracks with a 3D model (`gx:Track` with `Model`) in My Places, with no project layer, the time slider plays ×10 in a loop, the right-click menu over a truck has Camera follows. The "..., QGIS layer" items show the same haul as a track of a project point layer, as with own data through Track.... The trucks and their motion are a model, not data of the mine. See Tracks

Section	Scene	What it holds
Mars	Rover landing sites	Olympus Mons, Valles Marineris, the landing sites of Curiosity, Perseverance, Zhurong, Spirit and Opportunity
Mars	Jezero crater	The Perseverance landing site, the surroundings of the crater, an elevation profile across the crater, a point on the rim for the viewshed, a flight around the crater, the Slope layer and terrain with scale 3
Moon	Apollo and Lunokhod sites	The landing sites of six Apollo missions, Lunokhod 1 and Lunokhod 2
Sky	Constellations and bright sky objects	Orion, the Pleiades, the Andromeda Galaxy (M31), Cassiopeia, Ursa Major, Lyra with Vega, the Southern Cross

Landing coordinates are rounded to hundredths of a degree.

View snapshot and view to layout

View snapshot

The View snapshot icon opens a window with the snapshot width and height in pixels. A snapshot can be larger than the window, the globe loads detailed tiles for it. The Window proportions check box keeps the height in step with the width.

The Save… button asks for a PNG or JPEG file and starts the snapshot. The camera stands still meanwhile. The Take now button does not wait for the remaining tiles. The source credits stand in the bottom right corner of the snapshot.

The Copy view icon next to it puts the view of the window on the clipboard with one click, it can be pasted into a letter, a chat or a document at once. The copy has the globe, the layer scales, the labels, the source credits and the PlanetX mark. The icon bar, the navigation controls, the time slider and the tour bar are not in it, on the screen they stay. The size of the copy is the size of the view in screen pixels. The Copy the view to the clipboard action of the Search field does the same.

View to layout

The View to layout icon puts the view as a fixed picture into a QGIS layout, an existing one or a new one.

Field	What it sets
Layout	An existing layout or New layout
Width, Height	Size of the picture on the page in millimetres
Resolution	Output resolution of the layout, it sets the snapshot size in pixels

The picture is kept inside the project. The layout window opens after the insertion.

Other bodies

The Body icon on the icon bar opens the menu of bodies. The Earth is at the top, the Moon and Mars are below a separator, then come submenus:

Submenu	Bodies
Planets	Mercury, Venus, Jupiter
Moons of Jupiter	Io, Europa, Ganymede, Callisto
Moons of Saturn	Mimas, Enceladus, Tethys, Dione, Rhea, Titan, Iapetus
Asteroids	Ceres, Vesta

The menu holds only bodies imaged by spacecraft in full. On Pluto, Charon and Triton 24 to 33 % of the globe is not imaged, they are not in the menu.

The chosen body replaces the Earth. The size of the globe, the imagery and the atmosphere change, and the camera flies to the start point of the body. On Mars it is Olympus Mons, on the Moon it is the Sea of Tranquility, the Apollo 11 landing site, on Mercury the Caloris basin, on Venus Maxwell Montes. On other bodies it is a point on the equator and the prime meridian.

Imagery of the bodies other than Mars and the Moon comes from global mosaics of USGS Astrogeology and NASA, made from MESSENGER, Magellan, Galileo, Voyager, Cassini and Dawn data. A tile pixel at the equator ranges from 100 m on Enceladus and Vesta to 120 km on Jupiter. Some imagery does not look as the eye would see it:

- Venus is shown by the Magellan radar, the colour shows the height
- Jupiter is a Cassini cloud map of December 2000, its clouds do not move
- Titan is imaged in near infrared light through the haze
- Mercury, Io and Ganymede are in colour, other bodies are grey

The globe of each body is a sphere, Jupiter is an oblate ellipsoid. Vesta, Ceres and small moons are not spherical in reality, their imagery is slightly distorted on the sphere.

Mars imagery is the Viking MDIM2.1 colour mosaic, about 650 m per pixel. Moon imagery is the LROC WAC mosaic, about 330 m per pixel at the equator. Mars has a thin, dusty atmosphere, the Moon has none.

Mars terrain is built from the MOLA 463 m height mosaic, Moon terrain from the LOLA 118 m height mosaic, both by USGS Astrogeology. A height pixel at the equator is about 650 m on Mars and about 330 m on the Moon. The terrain is switched on with the same Terrain row of the Layers section, the vertical scale is set in the view properties. Mars heights refer to the areoid, Moon heights refer to a sphere of radius 1737.4 km. Depressions below zero are kept, the floor of the Hellas plain lies 7-8 km below zero.

On other bodies the navigation, grid, stars, ruler, My Places, tours, view snapshot and scenes work, on Mars and the Moon terrain works too. Functions with Earth-only data are off:

- vector base, clouds, temperature, 3D buildings and sunlight
- project layers and their labels, tracks
- synchronization with the QGIS map and feature identification
- place search by name. Coordinates in the search field work

Each place remembers its body. My Places lists the places of all bodies, the globe shows only the places of the current one. A flight to a place on another body switches the body first. A tour goes through the stops of the current body. A scene keeps its body and opens on it.

Assistant

The assistant answers topics and requests from the Search field. Its buttons stand in the Assistant group of the View properties window. Conversation... opens the Assistant window, Settings... the Assistant settings window. The conversation window with an AI model is Assistant. The model controls the globe on a request in words, for example "show a section across the Japan Trench" or "where are the deepest earthquakes near Japan this month". An API key of your own for the chosen service is needed.

The conversation goes in the Assistant window. The line at the top names the service and the model, the Settings button opens the Assistant settings window. There the service, address and model are chosen, the key is entered and the check boxes are set. By default OpenRouter with a free model is chosen.

- **Service.** Each service has its own key, address and model.
  - Claude (Anthropic) - Claude models, by default `claude-sonnet-5-5`.
  - Grok (xAI) - Grok models, by default `grok-4.7`.
  - DeepSeek - DeepSeek models, by default `deepseek-flash`.
  - OpenRouter (free models available) - models of many developers with one key. Models with `:free` in the name are free, the number of requests per day is limited. By default `openrouter/free`, it picks a free model that is available itself. If the chosen `:free` model is busy, the request goes to `openrouter/free`.
  - Own service, for example Ollama - any service of the OpenAI Chat format. A service on this computer needs no key. By default the Ollama address `http://localhost:11434/v1` and the model `qwen3`. The model must be able to call tools, otherwise the assistant only answers with text.
- **Key.** The key is entered in the Key field of the Assistant settings window and saved with the Save key button. The Keep the key without the master password box is checked by default. With it the key is saved as plain text in the QGIS profile settings, the master password is not asked. Anyone with access to the profile folder can read such a key. Without the box the key goes to the QGIS password manager, and QGIS may ask for the master password.
- **What the assistant does.** Flight to a point and place search, body change, rows of the Layers section and the time slider, the Earth cutaway and a section down along points, point information and an earthquake summary in a box. All actions of the Search field are available to the assistant as well - catalog layers and maps, windows and tools, demos and bodies. It also changes the opacity of a shown layer. File choice windows, tour recording and the CRUST1.0 export are opened by the assistant only with permission.
- **Manual.** To a question how to do something in the plugin, the assistant searches this manual and reads the section instead of guessing.
- **Placemarks in KML.** The assistant proposes placemarks, paths, polygons, folders and tours as a KML document. Below the conversation a proposal appears with the Write to My Places and Cancel buttons. Nothing is written without the button. Placemarks selected in My Places can be read by the assistant as KML and returned corrected.
- **Project layers.** The assistant can ask for the list of project layers - names, fields, coordinate systems and feature counts - and for rows of a vector layer, no more than 200 at a time, with a QGIS expression filter. You allow each such reading.
- **What goes to the model server.** The request text, the look-at point, the body and the rows switched on in the Layers section. Project layers, their fields and rows go only when you allowed the reading. From My Places only selected placemarks go.

The assistant's actions show in the conversation as Action lines.

Assistant permissions

The assistant reads project layers, opens file choice windows and records a tour only with permission. Below the conversation a question appears saying what the assistant wants to do, with three buttons. If the question came from the Search field, the Assistant window opens by itself.

Button	What it does
Allow	Runs the action once
Allow in this conversation	Exactly the same request is not asked again until a new conversation. Another layer or another filter is asked again
Decline	The assistant gets a refusal and answers without this action

A new question while a permission question waits removes it - the assistant gets a refusal.

The assistant makes no more than 16 rounds of actions in a row. Then the Continue button appears below the conversation - the assistant continues where it stopped - and Stop. If the model service is busy or limits the request rate, the assistant repeats the request up to three times with pauses of 2, 5 and 10 s. Long action answers are shortened - the model gets the beginning and the end, in a long conversation old answers are replaced with a mark.

Places from a description

A topic in the Search field, for example "voyages of Columbus" or "battles of the Hundred Years' War", becomes placemarks if no place with that name is found. Ctrl+Enter in the field and the Make places button of the Assistant window make placemarks at once, without a place search. The model answers with one KML document, it is written to My Places as a new folder at once, the camera flies to the places.

The model receives the rules of the document. They list everything the globe shows in space and in time:

- Places and events come as points, routes, fronts and borders - as lines along the real path, territories - as polygons.
- Time stands on every placemark with at least a known date or year. An event gets a moment, a campaign, a siege or a reign - an interval.
- A route is split into legs. Each leg is a line with its own time interval, on the time slider it grows from start to end.
- A change of a territory or a front line comes as several shapes with intervals in a row, on the time slider they replace one another.
- The document holds 100 placemarks at most.

The answer comes as a stream. While it comes, the line below the field shows the count of placemarks received and the Stop link. Stopping keeps the placemarks received whole. The plugin does the same when the answer breaks off or hits the length limit. The answer time grows with the size of the document.

The finished answer below the field names the folder, the number of placemarks and the number of placemarks with time. The time slider opens on the interval from the first to the last date. The Cancel link removes the made folder.

A topic like "World War I" searched with Enter finds places with these words in the name. Then the link Make places on the topic stands below the field, it does the same as the button.

The coordinates and dates come from the model, they need checking.

Requests from the Search field

A request can also be typed in the Search field of the left panel. The assistant receives a request with a question mark, a request of six words or more and a request that starts with a request or question word, for example "show", "where", "how many". A topic for which Nominatim finds no places, for example "Voyages of Columbus", turns into placemarks at once, as with the button next to the field. A question for which no places are found goes to the conversation. Outside the Earth any request except coordinates goes to the assistant. The answer appears below the field, the Conversation link opens the Assistant window with the history. Placemarks that the assistant proposes in the conversation are shown below the field with the Write to My Places link. The Answer requests from the Search field box of the Assistant settings window switches this off, then the field finds only places and coordinates. Without a saved API key the field also finds only places.

Starry sky

The Sky item of the Body menu shows the sky from the centre of the celestial sphere. It holds the Milky Way, 5080 stars down to magnitude 6, lines and names of 88 constellations and names of bright stars. The Sun, the Moon and the planets from Mercury to Neptune are there too. The north celestial pole is up and east is on the left, as on a star chart.

Action	What it does
Drag with the left button	The sky follows the cursor
Wheel, PageUp, PageDown, plus, minus	Changes the field of view from 0.1° to 110°
Double click with the left button	The point moves to the centre, the field of view halves
Double click with the right button	The field of view doubles
Arrows	The view moves by a tenth of the window height

The status bar shows the field of view, the right ascension and the declination of the point under the cursor. Equatorial coordinates refer to the epoch J2000.0. The Sun, the Moon and the planets are placed at the end of the open time slider range, otherwise at the computer clock time. Planet positions differ from the JPL Horizons ephemerides by at most 0.2° in the years 1800-2050, the Moon position by at most 0.3°.

The Constellations item of the same menu hides and shows the constellation lines and names. Stars, their names, the Sun, the Moon and the planets stay.

The Sky imagery on zooming in item of the same menu is on by default. From afar the sky is the NASA SVS Milky Way image with catalog stars as points. At a field of view from 50° to 35° the detailed NASA SVS Deep Star Maps 2020 sky map built from Gaia and Tycho stars, about 40″ per pixel, fades in instead. At a field of view from 6° to 3° images of the DSS survey of the CDS service (Strasbourg), down to 0.8″ per pixel, fade in over the map. DSS tiles arrive with a delay, until then the map is visible. DSS images are scans of photographic plates, neighbouring plates differ in brightness, and the brightness changes at a plate edge.

The Deep-sky objects item of the same menu shows labels of galaxies, nebulae and clusters. These are all Messier objects and NGC and IC objects brighter than magnitude 10 or with a common name, 617 in total, OpenNGC data. Messier objects are labelled at any field of view, the others at a field narrower than 40°. A circle shows the object size. A click on a label opens a card in the right panel with the type, designations, constellation, magnitude, size, coordinates and a link to the SIMBAD database. The Fly to button turns the view to the object, Explain this asks the assistant.

The Search line in the sky view finds catalog objects by designation and name - M31, M 31, NGC 224, Andromeda. An object outside the catalog is looked up on Enter by the CDS Sesame name service, for example Crab or NGC 6543.

Places and tours work in the sky. Save view puts a place with the view direction and the field of view. New place puts a point with a click on the sky. Record a flight records the motion over the sky. Sky places are kept in My Places with the others and are shown in the sky as yellow circles with a label. A tour and the ▶ button in the sky go through the sky places, between distant points the field of view widens on the way. A flight to a sky place from the list opens the sky.

The ruler, synchronization and feature identification are off in the sky. A view snapshot saves the sky with its labels. A scene keeps the view direction and the field of view. To return to a body, choose it in the same menu.

Telegram bot

The @PlanetXQgisBot bot answers questions about this manual and the manuals of the other plugins of the line - Isoliner, Isoliner3D, Topoliner, Routeliner, Repoliner. A plugin name in the question limits the search to its manual. A question is written as plain text, for example "how to add a 3D model" or "record a tour to video". The bot sends up to three manual sections with a paragraph and a link, the button under a section sends it whole. The answer language is the Telegram language of the user, Russian or English.

Bot commands:

- /latest - the latest release of a plugin - PlanetX, Isoliner, Isoliner3D, Topoliner, Routeliner or Repoliner, what is new in it, a link to the archive and the page in the QGIS catalog.
- /docs - the plugins, their pages on GitHub and in the QGIS catalog, the PlanetX manual.
- /report text - a bug report or a wish for the developers. The Telegram name and user name go with the text.

The Telegram bot button of the About window opens the bot. Posts about releases of the plugin line appear in the @qgis_isolines channel.

Log

The plugin keeps a log in the file `PlanetX/planetx.log` of the QGIS profile folder. The Log button of the About window opens it in the system program. The log records the versions of the plugin, QGIS, Qt and Python, the graphics card, the opening and closing of the globe window, the choice of maps and layers, the base map, the body and the demo, the SSL errors of QGIS network requests with the certificate owner. The log receives all unhandled Python errors in QGIS, including those in worker threads. An error of another plugin is marked with its name. Every 15 minutes the log records the memory of QGIS and the count of Windows GDI and USER objects.

When QGIS does not respond for more than 30 s, a separate watch process of the plugin writes next to the log a process dump `hang-<process number>-<time>.dmp` with the stacks of all threads, about 300 KB without memory contents, and writes its analysis at once - for every thread the QGIS and Qt functions it stands in. It shows which thread waits for what. The watch runs outside QGIS and writes the dump even when QGIS hangs completely. The last three dumps are kept.

The log records a QGIS crash at the next start. The log gets the process number and the start time of the crashed session, the Python stacks at the crash and the path to the Windows dump, if there is one. While the Windows error window keeps the crashed QGIS open, the session counts as alive. A normal QGIS exit is marked with the line "QGIS is closed".

When QGIS does not respond for more than 10 s, the log receives the stacks of all Python threads. When QGIS responds again, the log gets a line with the length of the pause. This shows where QGIS hung even when it had to be closed. A log larger than 1 MB is renamed to `planetx.1.log`, and a new one starts. The log file helps with an error report.

Limitations

- Project layers lie on the terrain as a picture, a layer cannot be raised or extruded by a field. Your own places have lift and extrusion.
- A layer with time from an expression does not enter the extent of the time slider, its range is set with the handles manually.
- The Web Mercator tile grid ends at latitude 85°. With an imagery base map the poles are covered with the imagery of the Esri polar services Arctic Imagery and Antarctic Imagery, about 930 m per pixel, with a map base map - with the color of the map edge.
- Recording a tour takes longer than the tour itself.
- Buildings are blocks with flat roofs, roof shapes and facades are not shown.
- Mars and Moon heights are coarser than Earth heights, a height pixel at the equator is 2.6 km and 1.3 km. Craters smaller than 5-10 km do not show in the heights.
- KML does not store the body of a place, places from a KML file go to the current body.
- The sky is shown from the centre of the Earth, without the horizon of an observing site. Coordinates are not reduced to the date, by 2026 precession shifts them by about 0.36°.

Data sources

Imagery - Esri World Imagery, Esri sets the terms. Map data © OpenStreetMap contributors. Vector tiles and 3D buildings - OpenFreeMap. Terrain - Mapzen Terrain Tiles, SRTM, GMTED, ETOPO1 and other data. Clouds - NASA GIBS, VIIRS imagery. Temperature - NASA GIBS, MODIS and GHRSST MUR. Stars - the Yale Bright Star Catalogue. Milky Way - NASA/Goddard Space Flight Center Scientific Visualization Studio, Gaia DR2 - ESA/Gaia/DPAC. Place search - Nominatim. Mars - NASA, USGS, Viking MDIM2.1, OpenPlanetaryMap tiles, the Moon - NASA, GSFC, ASU, LRO LROC WAC, USGS. Mars heights - NASA MGS MOLA, USGS, Moon heights - NASA LRO LOLA, USGS. Imagery of other bodies - global mosaics of USGS Astrogeology and NASA Photojournal from data of NASA, JPL, DLR and mission institutes, the credit of each body is in the corner of the view. Constellation lines, names and star names - d3-celestial, © Olaf Frohn. Planet positions are computed from JPL orbital elements, the Moon position from the formulae of the Astronomical Almanac.

The terms of all sources are described in SOURCES.md. Tiles go through the QGIS network settings and cache, the plugin keeps no cache of its own.

Developed with the support of Inform++ LLC. License GNU GPL version 3.